




# OIL ANALYSIS REPORT

Sample Rating Trend

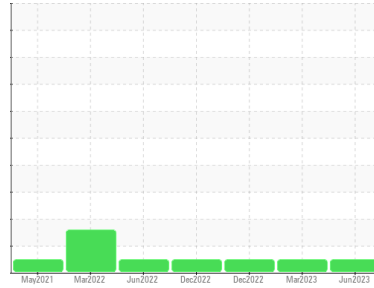

**NORMAL**



Machine Id  
**727027-598**  
 Component  
**Diesel Engine**  
 Fluid  
**CHEVRON DELO 400 XLE 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history 1	history 2
Sample Number	Client Info		<b>GFL0064485</b>	GFL0064456	GFL0068166
Sample Date	Client Info		<b>26 Jun 2023</b>	23 Mar 2023	22 Dec 2022
Machine Age	hrs	Client Info	<b>14937</b>	19396	13894
Oil Age	hrs	Client Info	<b>543</b>	0	84
Oil Changed	Client Info		<b>Not Chngd</b>	Not Chngd	Not Chngd
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history 1	history 2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history 1	history 2
Iron	ppm	ASTM D5185m >120	<b>65</b>	59	18
Chromium	ppm	ASTM D5185m >20	<b>3</b>	2	<1
Nickel	ppm	ASTM D5185m >5	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185m >2	<b>3</b>	<1	0
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >20	<b>4</b>	6	1
Lead	ppm	ASTM D5185m >40	<b>5</b>	2	<1
Copper	ppm	ASTM D5185m >330	<b>2</b>	1	0
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	0	0
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history 1	history 2
Boron	ppm	ASTM D5185m	<b>83</b>	11	6
Barium	ppm	ASTM D5185m	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	<b>87</b>	61	59
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	<1	0
Magnesium	ppm	ASTM D5185m	<b>644</b>	1062	959
Calcium	ppm	ASTM D5185m	<b>1323</b>	1298	1126
Phosphorus	ppm	ASTM D5185m 760	<b>675</b>	1054	1005
Zinc	ppm	ASTM D5185m 830	<b>853</b>	1402	1280
Sulfur	ppm	ASTM D5185m 2770	<b>2587</b>	3675	3590

## CONTAMINANTS

	method	limit/base	current	history 1	history 2
Silicon	ppm	ASTM D5185m >25	<b>11</b>	6	3
Sodium	ppm	ASTM D5185m	<b>8</b>	8	4
Potassium	ppm	ASTM D5185m >20	<b>5</b>	6	2

## INFRA-RED



	method	limit/base	current	history 1	history 2
Soot %	%	*ASTM D7844 >4	<b>0.5</b>	2.8	0.9
Nitration	Abs/cm	*ASTM D7624 >20	<b>7.9</b>	16.4	9.2
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>20.0</b>	29.0	22.1

## FLUID DEGRADATION

	method	limit/base	current	history 1	history 2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>15.2</b>	24.2	17.3
Base Number (BN)	mg KOH/g	ASTM D2896 10.7	<b>9.2</b>	8.2	10.4








# OIL ANALYSIS REPORT

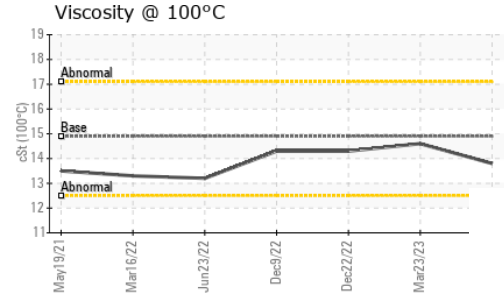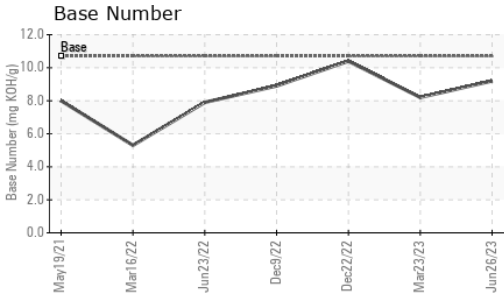

VISUAL	method	limit/base	current	history 1	history 2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history 1	history 2	
Visc @ 100°C	cSt	ASTM D445	14.9	<b>13.8</b>	14.6	14.3

## GRAPHS

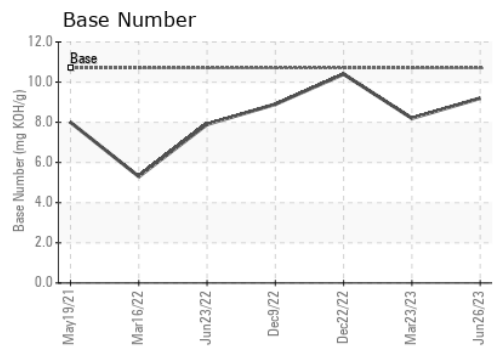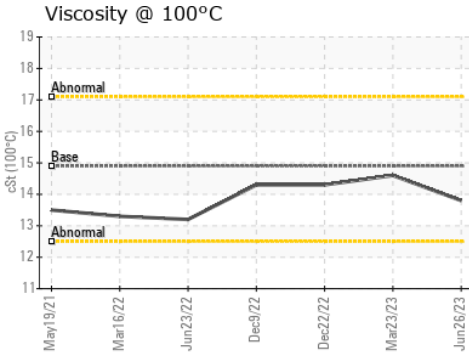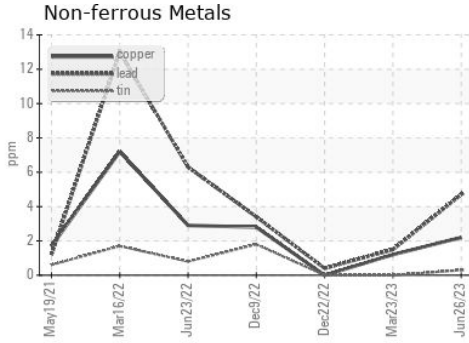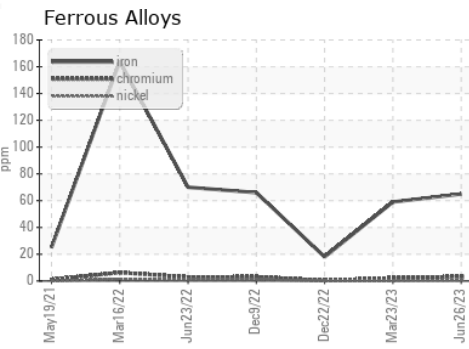

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0064485 **Received** : 30 Jun 2023  
**Lab Number** : 05888214 **Diagnosed** : 04 Jul 2023  
**Unique Number** : 10538697 **Diagnostician** : Don Baldrige  
**Test Package** : FLEET

**GFL Environmental - 624 - Elmira Hauling**  
 10164 M-32  
 Elmira, MI  
 US 49730  
 Contact: ANDY GROBASKI  
 andyg@americanwaste.org  
 T: (989)370-2941  
 F:

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)