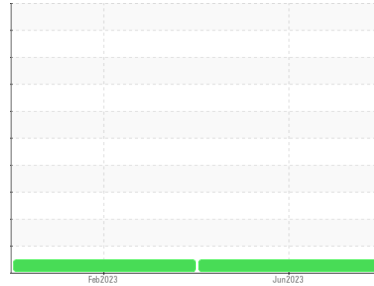


# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**


Area  
**(97170X) Walgreens**  
 Machine Id  
**[Walgreens] 136A62081**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 10W30 (11 GAL)**

**DIAGNOSIS**
**Recommendation**

Resample at the next service interval to monitor.

**Wear**

All component wear rates are normal.

**Contamination**

There is no indication of any contamination in the oil.

**Fluid Condition**

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history 1	history 2
Sample Number	Client Info			<b>PCA0096021</b>	PCA0092807	---
Sample Date	Client Info			<b>22 Jun 2023</b>	16 Feb 2023	---
Machine Age	mls	Client Info		<b>456612</b>	411427	---
Oil Age	mls	Client Info		<b>50000</b>	50000	---
Oil Changed	Client Info			<b>Changed</b>	Changed	---
Sample Status				<b>NORMAL</b>	NORMAL	---

CONTAMINATION		method	limit/base	current	history 1	history 2
Fuel	WC Method	>5		<b>&lt;1.0</b>	<1.0	---
Glycol	WC Method			<b>NEG</b>	NEG	---

WEAR METALS		method	limit/base	current	history 1	history 2
Iron	ppm	ASTM D5185m	>80	<b>29</b>	19	---
Chromium	ppm	ASTM D5185m	>5	<b>2</b>	1	---
Nickel	ppm	ASTM D5185m	>2	<b>0</b>	0	---
Titanium	ppm	ASTM D5185m		<b>0</b>	0	---
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m	>30	<b>10</b>	11	---
Lead	ppm	ASTM D5185m	>30	<b>0</b>	<1	---
Copper	ppm	ASTM D5185m	>150	<b>5</b>	3	---
Tin	ppm	ASTM D5185m	>5	<b>&lt;1</b>	<1	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	---
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	---



ADDITIVES		method	limit/base	current	history 1	history 2
Boron	ppm	ASTM D5185m	2	<b>2</b>	6	---
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185m	50	<b>63</b>	52	---
Manganese	ppm	ASTM D5185m	0	<b>&lt;1</b>	1	---
Magnesium	ppm	ASTM D5185m	950	<b>884</b>	831	---
Calcium	ppm	ASTM D5185m	1050	<b>1093</b>	1177	---
Phosphorus	ppm	ASTM D5185m	995	<b>979</b>	862	---
Zinc	ppm	ASTM D5185m	1180	<b>1215</b>	1164	---
Sulfur	ppm	ASTM D5185m	2600	<b>2886</b>	2704	---

CONTAMINANTS		method	limit/base	current	history 1	history 2
Silicon	ppm	ASTM D5185m	>20	<b>5</b>	5	---
Sodium	ppm	ASTM D5185m		<b>2</b>	3	---
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	2	---

INFRA-RED		method	limit/base	current	history 1	history 2
Soot %	%	*ASTM D7844	>3	<b>0.8</b>	0.8	---
Nitration	Abs/cm	*ASTM D7624	>20	<b>9.2</b>	9.4	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>22.3</b>	22.1	---

FLUID DEGRADATION		method	limit/base	current	history 1	history 2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>18.5</b>	18.0	---
Base Number (BN)	mg KOH/g	ASTM D2896		<b>5.7</b>	5.9	---





# OIL ANALYSIS REPORT

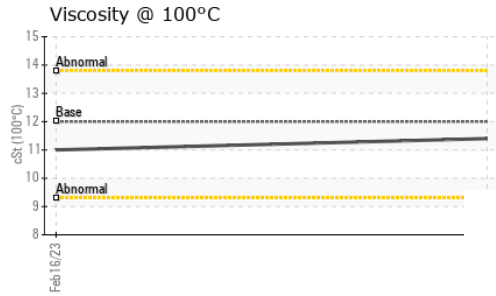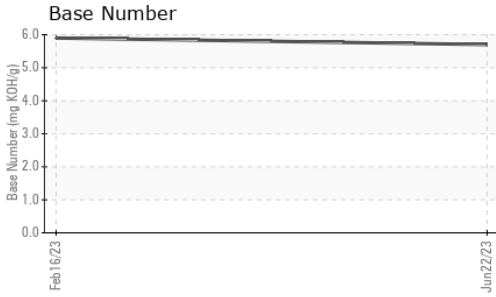

VISUAL	method	limit/base	current	history 1	history 2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history 1	history 2	
Visc @ 100°C	cSt	ASTM D445	12.00	<b>11.4</b>	11.0	---

## GRAPHS

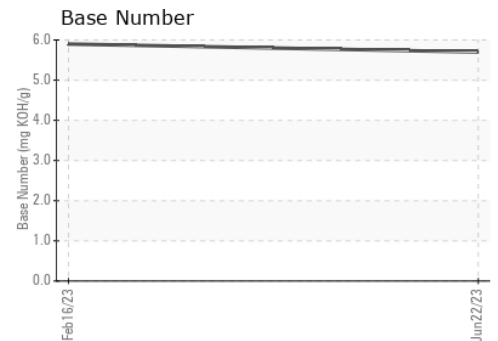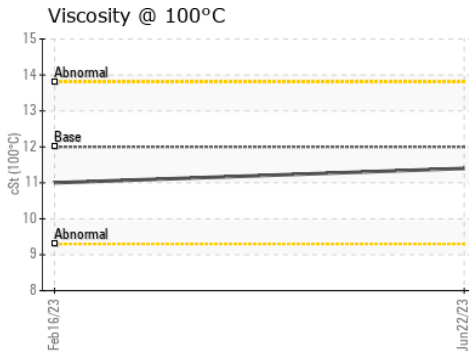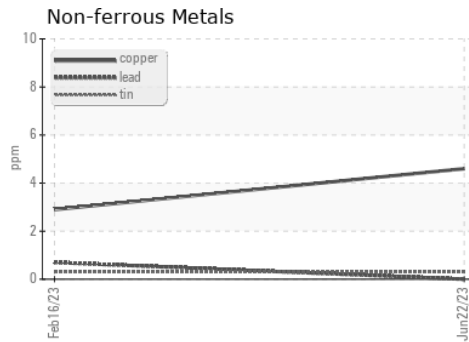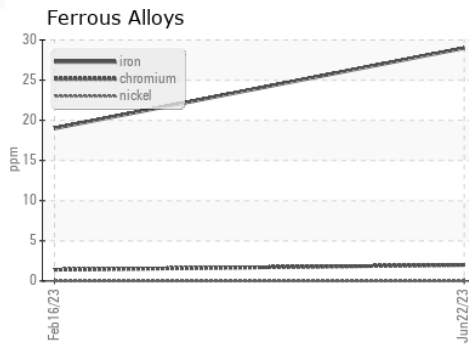

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0096021 **Received** : 30 Jun 2023  
**Lab Number** : **05888309** **Diagnosed** : 04 Jul 2023  
**Unique Number** : 10538792 **Diagnostician** : Don Baldrige  
**Test Package** : FLEET

**Transervice - Shop 1370 - Berkeley-Perrysburg**  
 28727 Oregon Road  
 Perrysburg, OH  
 US 43551  
 Contact: Curtis Hart  
 chart@transervice.com  
 T: (419)666-3277  
 F: (419)666-3279

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)