

OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL



Area
(15602Z) Walgreens
Machine Id
[Walgreens] 136A61343
Component
Diesel Engine
Fluid
PETRO CANADA DURON SHP 10W30 (11 GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history 1	history 2
Sample Number	Client Info	PCA0096042	---	---
Sample Date	Client Info	06 Jun 2023	---	---
Machine Age	mls Client Info	297744	---	---
Oil Age	mls Client Info	50000	---	---
Oil Changed	Client Info	Changed	---	---
Sample Status		NORMAL	---	---

CONTAMINATION

method	limit/base	current	history 1	history 2
Fuel	WC Method >5	<1.0	---	---
Glycol	WC Method	NEG	---	---

WEAR METALS

method	limit/base	current	history 1	history 2
Iron	ppm ASTM D5185m >80	25	---	---
Chromium	ppm ASTM D5185m >5	2	---	---
Nickel	ppm ASTM D5185m >2	0	---	---
Titanium	ppm ASTM D5185m	0	---	---
Silver	ppm ASTM D5185m >3	0	---	---
Aluminum	ppm ASTM D5185m >30	8	---	---
Lead	ppm ASTM D5185m >30	0	---	---
Copper	ppm ASTM D5185m >150	7	---	---
Tin	ppm ASTM D5185m >5	<1	---	---
Vanadium	ppm ASTM D5185m	0	---	---
Cadmium	ppm ASTM D5185m	0	---	---

ADDITIVES

method	limit/base	current	history 1	history 2
Boron	ppm ASTM D5185m 2	1	---	---
Barium	ppm ASTM D5185m 0	0	---	---
Molybdenum	ppm ASTM D5185m 50	66	---	---
Manganese	ppm ASTM D5185m 0	<1	---	---
Magnesium	ppm ASTM D5185m 950	915	---	---
Calcium	ppm ASTM D5185m 1050	1100	---	---
Phosphorus	ppm ASTM D5185m 995	986	---	---
Zinc	ppm ASTM D5185m 1180	1230	---	---
Sulfur	ppm ASTM D5185m 2600	2830	---	---

CONTAMINANTS

method	limit/base	current	history 1	history 2
Silicon	ppm ASTM D5185m >20	11	---	---
Sodium	ppm ASTM D5185m	1	---	---
Potassium	ppm ASTM D5185m >20	7	---	---



INFRA-RED

method	limit/base	current	history 1	history 2
Soot %	% *ASTM D7844 >3	0.9	---	---
Nitration	Abs/cm *ASTM D7624 >20	9.4	---	---
Sulfation	Abs/.1mm *ASTM D7415 >30	22.6	---	---

FLUID DEGRADATION

method	limit/base	current	history 1	history 2
Oxidation	Abs/.1mm *ASTM D7414 >25	19.0	---	---
Base Number (BN)	mg KOH/g ASTM D2896	5.8	---	---





OIL ANALYSIS REPORT

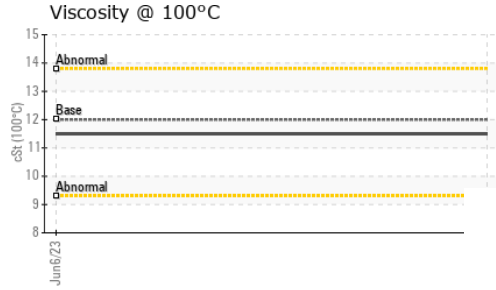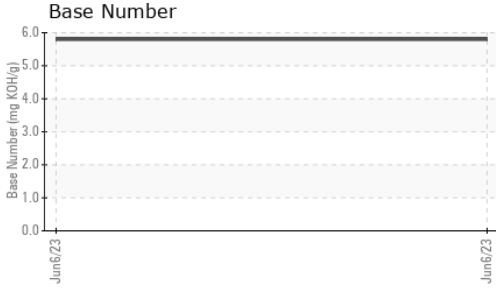

PARAMETER	method	limit/base	current	history 1	history 2	
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---
Precipitate	scalar	*Visual	NONE	NONE	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---
Free Water	scalar	*Visual		NEG	---	---

FLUID PROPERTIES	method	limit/base	current	history 1	history 2	
Visc @ 100°C	cSt	ASTM D445	12.00	11.5	---	---

GRAPHS

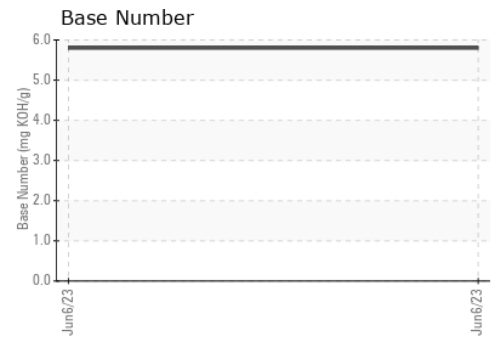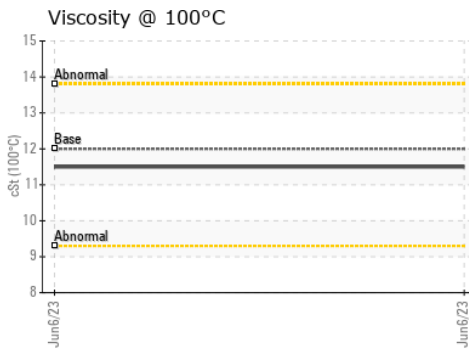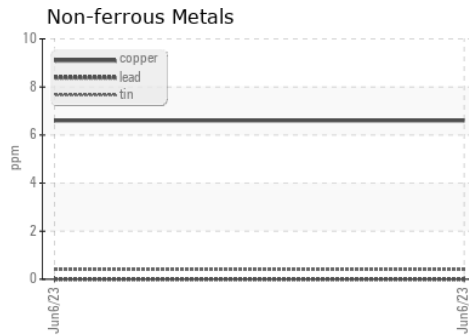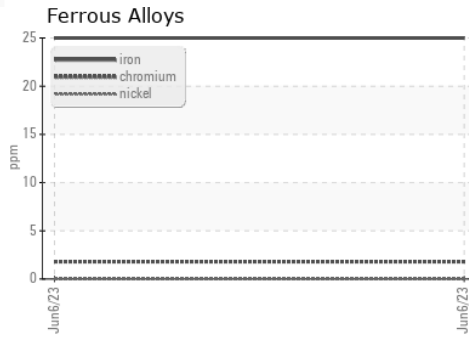

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0096042 **Received** : 30 Jun 2023
Lab Number : 05888317 **Diagnosed** : 04 Jul 2023
Unique Number : 10538800 **Diagnostician** : Don Baldrige
Test Package : FLEET

Transervice - Shop 1370 - Berkeley-Perrysburg
 28727 Oregon Road
 Perrysburg, OH
 US 43551
 Contact: Curtis Hart
 chart@transervice.com
 T: (419)666-3277
 F: (419)666-3279

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)