


# OIL ANALYSIS REPORT

Sample Rating Trend



**NORMAL**

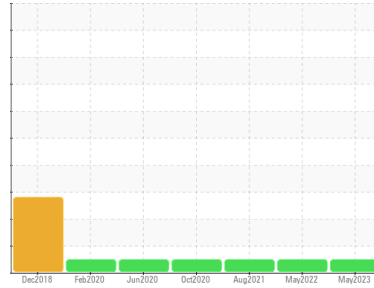

Machine Id  
**698053**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 10W30 (38 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history 1	history 2
Sample Number	Client Info			<b>PCA0097809</b>	PCA0068553	PCA0055004
Sample Date	Client Info			<b>05 May 2023</b>	18 May 2022	17 Aug 2021
Machine Age	mls	Client Info		<b>361999</b>	0	0
Oil Age	mls	Client Info		<b>0</b>	0	30000
Oil Changed	Client Info			<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history 1	history 2
Fuel	WC Method	>5		<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method			<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history 1	history 2
Iron	ppm	ASTM D5185m	>100	<b>36</b>	56	60
Chromium	ppm	ASTM D5185m	>20	<b>2</b>	3	3
Nickel	ppm	ASTM D5185m	>4	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185m		<b>0</b>	<1	<1
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	<1
Aluminum	ppm	ASTM D5185m	>20	<b>17</b>	24	23
Lead	ppm	ASTM D5185m	>40	<b>0</b>	<1	0
Copper	ppm	ASTM D5185m	>330	<b>10</b>	13	28
Tin	ppm	ASTM D5185m	>15	<b>1</b>	2	2
Antimony	ppm	ASTM D5185m		<b>---</b>	---	0
Vanadium	ppm	ASTM D5185m		<b>0</b>	<1	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0



ADDITIVES		method	limit/base	current	history 1	history 2
Boron	ppm	ASTM D5185m	2	<b>2</b>	1	1
Barium	ppm	ASTM D5185m	0	<b>2</b>	0	0
Molybdenum	ppm	ASTM D5185m	50	<b>69</b>	63	67
Manganese	ppm	ASTM D5185m	0	<b>&lt;1</b>	<1	1
Magnesium	ppm	ASTM D5185m	950	<b>857</b>	953	1003
Calcium	ppm	ASTM D5185m	1050	<b>1121</b>	1106	1188
Phosphorus	ppm	ASTM D5185m	995	<b>953</b>	996	1049
Zinc	ppm	ASTM D5185m	1180	<b>1168</b>	1287	1335
Sulfur	ppm	ASTM D5185m	2600	<b>2558</b>	2385	2133

CONTAMINANTS		method	limit/base	current	history 1	history 2
Silicon	ppm	ASTM D5185m	>25	<b>4</b>	6	5
Sodium	ppm	ASTM D5185m		<b>0</b>	5	4
Potassium	ppm	ASTM D5185m	>20	<b>13</b>	18	23

INFRA-RED		method	limit/base	current	history 1	history 2
Soot %	%	*ASTM D7844	>3	<b>1.7</b>	1.9	1.9
Nitration	Abs/cm	*ASTM D7624	>20	<b>11.8</b>	13.3	14.2
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>25.7</b>	26.8	27.2

FLUID DEGRADATION		method	limit/base	current	history 1	history 2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>21.7</b>	22.3	23.4
Base Number (BN)	mg KOH/g	ASTM D2896		<b>5.5</b>	5.0	---









# OIL ANALYSIS REPORT

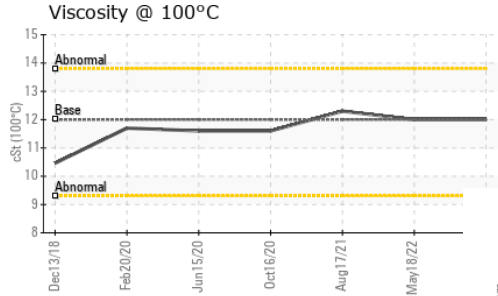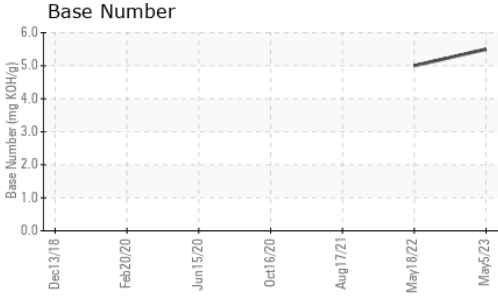

PARAMETER	method	limit/base	current	history 1	history 2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history 1	history 2
Visc @ 100°C	cSt	ASTM D445	12.00	12.0	12.3

### GRAPHS

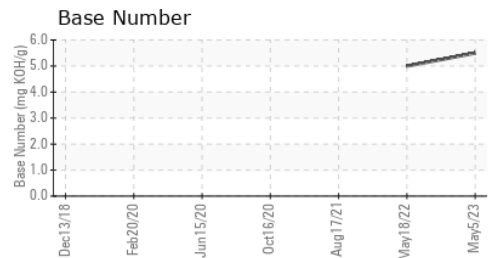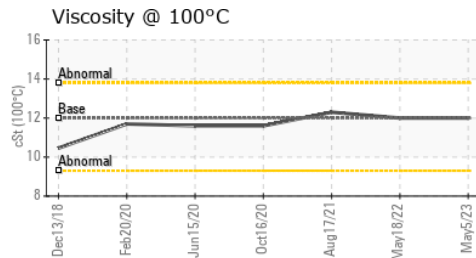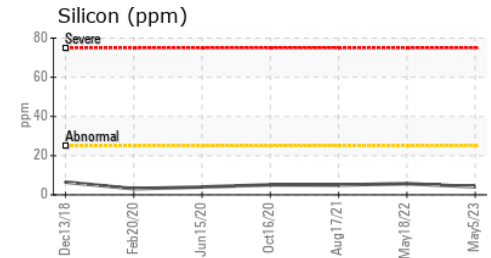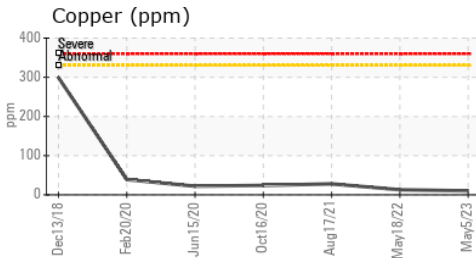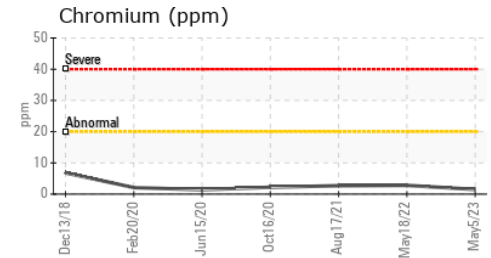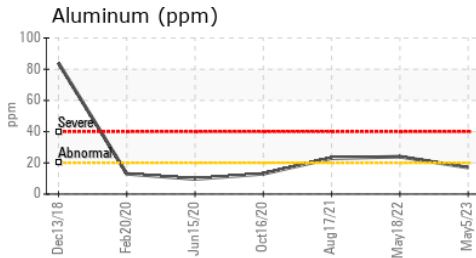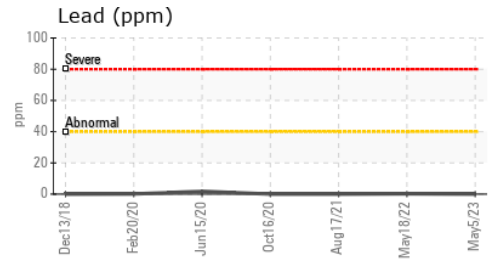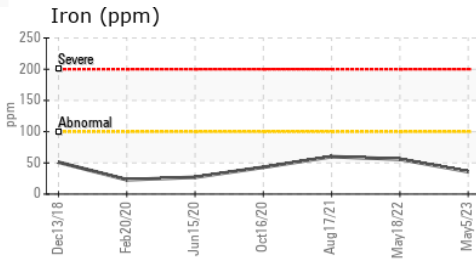

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0097809 **Received** : 03 Jul 2023  
**Lab Number** : 05888698 **Diagnosed** : 05 Jul 2023  
**Unique Number** : 10539181 **Diagnostician** : Wes Davis  
**Test Package** : MOB 1 ( Additional Tests: TBN )

63 REPAUPO STATION ROAD  
 LOGAN TOWNSHIP, NJ  
 US 08085  
 Contact: ED DAVIS  
 edavis@millertransgroup.com  
 T: (856)214-3521  
 F: (856)214-3663

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)