


# OIL ANALYSIS REPORT

Sample Rating Trend



**NORMAL**

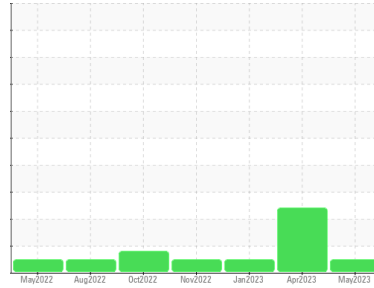

Machine Id  
**SJB720**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 10W30 (--- QTS)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

### Wear

Metal levels are typical for a new component breaking in.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history 1	history 2
Sample Number	Client Info		<b>PCA0097803</b>	PCA0094478	PCA0089979
Sample Date	Client Info		<b>15 May 2023</b>	07 Apr 2023	17 Jan 2023
Machine Age	mls	Client Info	<b>71944</b>	67344	61909
Oil Age	mls	Client Info	<b>4400</b>	5635	1577
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	ABNORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history 1	history 2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history 1	history 2
Iron	ppm	ASTM D5185m >100	<b>12</b>	72	11
Chromium	ppm	ASTM D5185m >20	<b>0</b>	6	<1
Nickel	ppm	ASTM D5185m >4	<b>0</b>	<1	0
Titanium	ppm	ASTM D5185m	<b>0</b>	<1	0
Silver	ppm	ASTM D5185m >3	<b>&lt;1</b>	0	0
Aluminum	ppm	ASTM D5185m >20	<b>2</b>	▲ 49	1
Lead	ppm	ASTM D5185m >40	<b>&lt;1</b>	<1	<1
Copper	ppm	ASTM D5185m >330	<b>1</b>	14	2
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	3	<1
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history 1	history 2
Boron	ppm	ASTM D5185m 2	<b>17</b>	36	17
Barium	ppm	ASTM D5185m 0	<b>2</b>	<1	0
Molybdenum	ppm	ASTM D5185m 50	<b>65</b>	38	64
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	7	<1
Magnesium	ppm	ASTM D5185m 950	<b>797</b>	588	913
Calcium	ppm	ASTM D5185m 1050	<b>1152</b>	1571	1119
Phosphorus	ppm	ASTM D5185m 995	<b>1011</b>	766	1013
Zinc	ppm	ASTM D5185m 1180	<b>1158</b>	971	1261
Sulfur	ppm	ASTM D5185m 2600	<b>3213</b>	3999	3819

## CONTAMINANTS

	method	limit/base	current	history 1	history 2
Silicon	ppm	ASTM D5185m >25	<b>3</b>	▲ 27	3
Sodium	ppm	ASTM D5185m	<b>0</b>	5	1
Potassium	ppm	ASTM D5185m >20	<b>2</b>	2	<1



## INFRA-RED

	method	limit/base	current	history 1	history 2
Soot %	%	*ASTM D7844 >3	<b>0.6</b>	0.7	0.3
Nitration	Abs/cm	*ASTM D7624 >20	<b>7.1</b>	7.4	5.9
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>19.4</b>	17.4	17.8

## FLUID DEGRADATION

	method	limit/base	current	history 1	history 2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>15.7</b>	13.9	13.6
Base Number (BN)	mg KOH/g	ASTM D2896	<b>9.1</b>	8.0	9.8









# OIL ANALYSIS REPORT

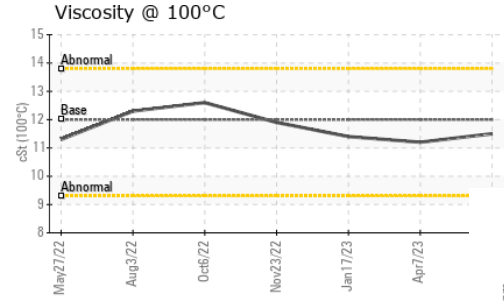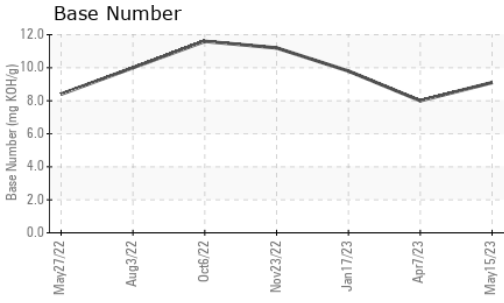

VISUAL	method	limit/base	current	history 1	history 2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history 1	history 2
Visc @ 100°C	cSt	ASTM D445	12.00	11.5	11.2

## GRAPHS

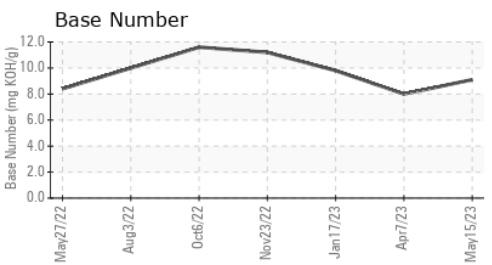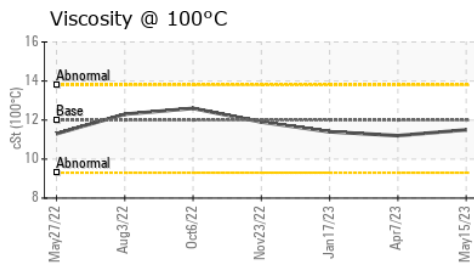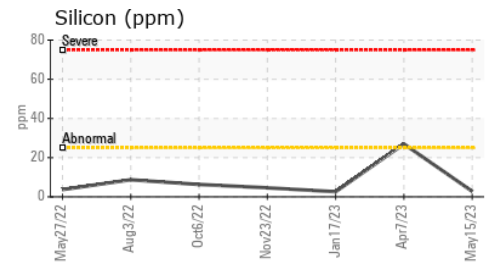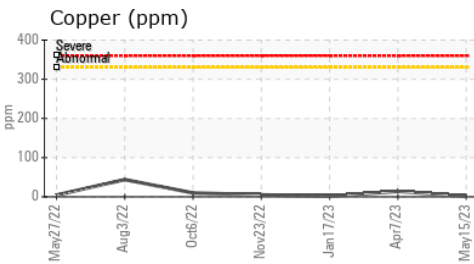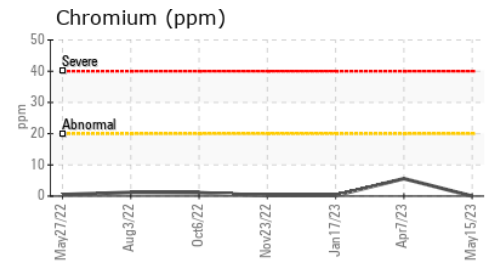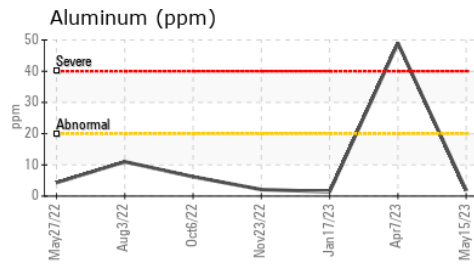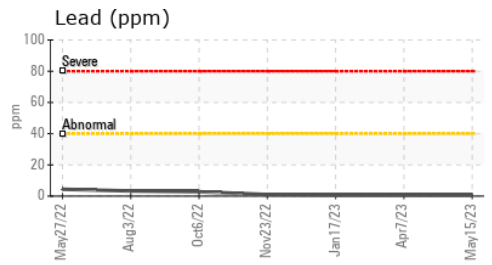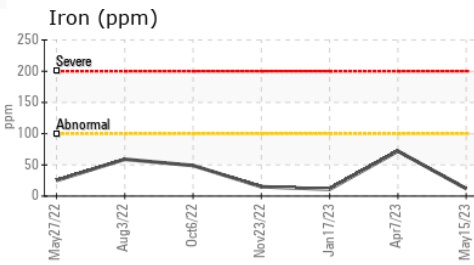

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0097803 **Received** : 03 Jul 2023  
**Lab Number** : 05888716 **Diagnosed** : 05 Jul 2023  
**Unique Number** : 10539199 **Diagnostician** : Wes Davis  
**Test Package** : MOB 1 ( Additional Tests: TBN )

63 REPAUPO STATION ROAD  
 LOGAN TOWNSHIP, NJ  
 US 08085  
 Contact: ED DAVIS  
 edavis@millertransgroup.com  
 T: (856)214-3521  
 F: (856)214-3663

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)