


# OIL ANALYSIS REPORT

## Sample Rating Trend



**NORMAL**

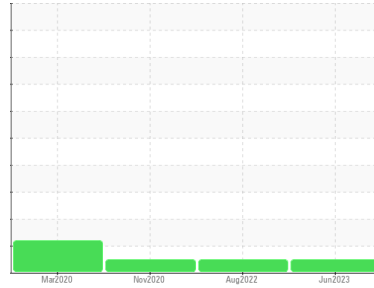

Machine Id  
**302141**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 10W30 (--- QTS)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

### SAMPLE INFORMATION

method	limit/base	current	history 1	history 2	
Sample Number	Client Info	<b>PCA0083830</b>	PCA0071771	PCA0029384	
Sample Date	Client Info	<b>22 Jun 2023</b>	08 Aug 2022	12 Nov 2020	
Machine Age	mls	Client Info	<b>125192</b>	90349	50632
Oil Age	mls	Client Info	<b>34843</b>	20663	12666
Oil Changed	Client Info	<b>Changed</b>	Changed	Changed	
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL	

### CONTAMINATION

method	limit/base	current	history 1	history 2
Fuel	WC Method >5	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method	<b>NEG</b>	NEG	NEG

### WEAR METALS

method	limit/base	current	history 1	history 2
Iron	ppm ASTM D5185m >100	<b>44</b>	30	33
Chromium	ppm ASTM D5185m >20	<b>3</b>	2	2
Nickel	ppm ASTM D5185m >4	<b>2</b>	2	<1
Titanium	ppm ASTM D5185m	<b>53</b>	1	3
Silver	ppm ASTM D5185m >3	<b>2</b>	<1	<1
Aluminum	ppm ASTM D5185m >20	<b>16</b>	13	18
Lead	ppm ASTM D5185m >40	<b>4</b>	<1	<1
Copper	ppm ASTM D5185m >330	<b>6</b>	4	14
Tin	ppm ASTM D5185m >15	<b>3</b>	2	2
Antimony	ppm ASTM D5185m	<b>---</b>	---	0
Vanadium	ppm ASTM D5185m	<b>2</b>	1	0
Cadmium	ppm ASTM D5185m	<b>2</b>	<1	0

### ADDITIVES

method	limit/base	current	history 1	history 2
Boron	ppm ASTM D5185m 2	<b>18</b>	3	10
Barium	ppm ASTM D5185m 0	<b>19</b>	<1	0
Molybdenum	ppm ASTM D5185m 50	<b>19</b>	61	52
Manganese	ppm ASTM D5185m 0	<b>3</b>	2	1
Magnesium	ppm ASTM D5185m 950	<b>446</b>	952	938
Calcium	ppm ASTM D5185m 1050	<b>1280</b>	1111	1225
Phosphorus	ppm ASTM D5185m 995	<b>751</b>	1041	1055
Zinc	ppm ASTM D5185m 1180	<b>935</b>	1253	1255
Sulfur	ppm ASTM D5185m 2600	<b>3092</b>	3403	2840

### CONTAMINANTS

method	limit/base	current	history 1	history 2
Silicon	ppm ASTM D5185m >25	<b>6</b>	7	3
Sodium	ppm ASTM D5185m	<b>6</b>	3	4
Potassium	ppm ASTM D5185m >20	<b>17</b>	11	26



### INFRA-RED

method	limit/base	current	history 1	history 2
Soot %	% *ASTM D7844 >3	<b>1.3</b>	0.7	0.5
Nitration	Abs/cm *ASTM D7624 >20	<b>14.4</b>	12.2	9.3
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>30.9</b>	22.8	20.9

### FLUID DEGRADATION

method	limit/base	current	history 1	history 2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>26.9</b>	18.8	16.4
Base Number (BN)	mg KOH/g ASTM D2896	<b>6.2</b>	8.5	---









# OIL ANALYSIS REPORT

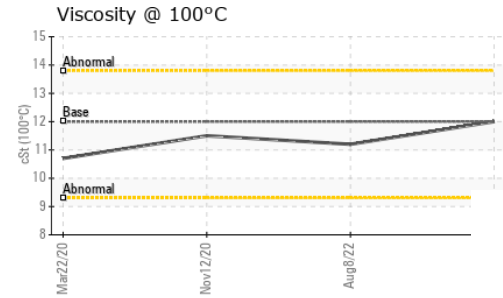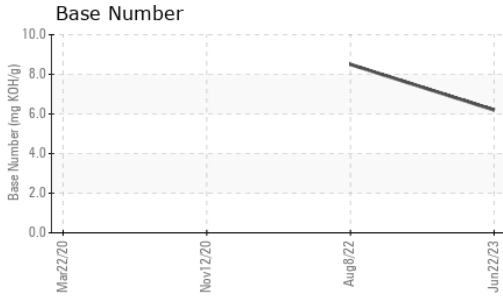

VISUAL	method	limit/base	current	history 1	history 2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history 1	history 2
Visc @ 100°C	cSt	ASTM D445	12.00	12.0	11.2

## GRAPHS

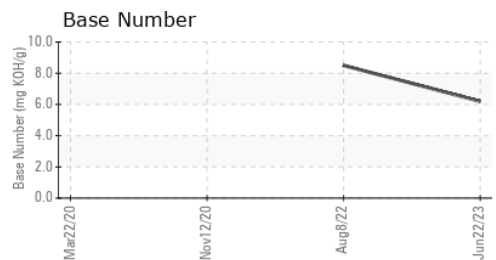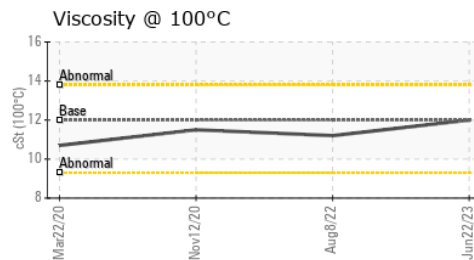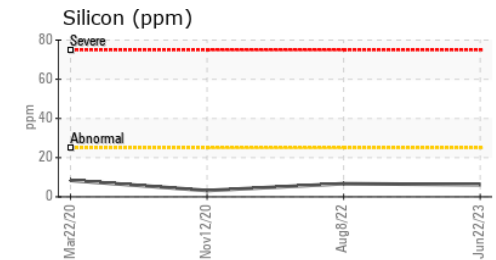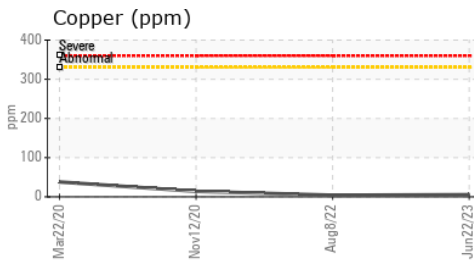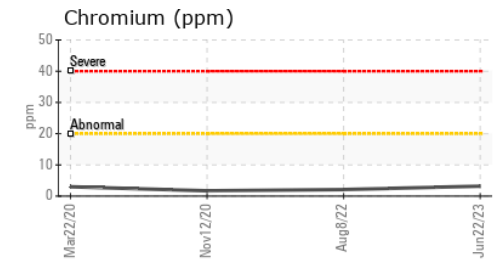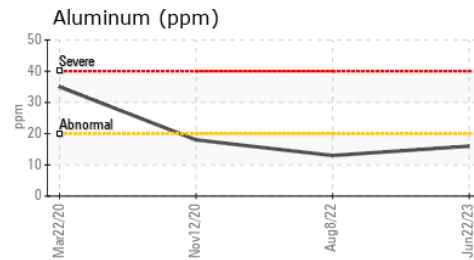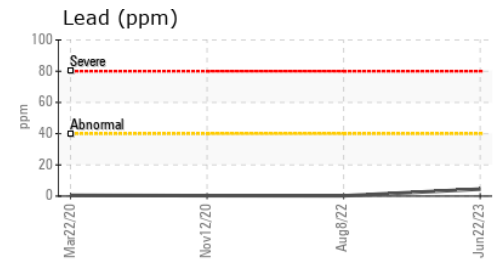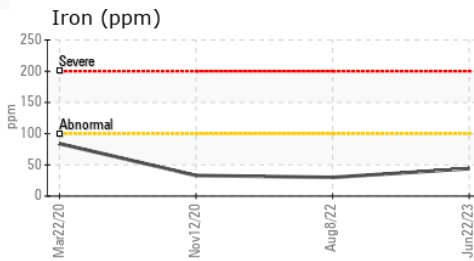

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0083830 **Received** : 03 Jul 2023  
**Lab Number** : 05888790 **Diagnosed** : 05 Jul 2023  
**Unique Number** : 10539273 **Diagnostician** : Don Baldrige  
**Test Package** : MOB 1 ( Additional Tests: TBN )

**MILLER TRUCK LEASING #123**  
 66 KELLER AVENUE  
 LANCASTER, PA  
 US 17601  
 Contact: RON ROBERTS  
 roberts@millertransgroup.com  
 T: (717)945-6205  
 F: (717)945-5818

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)