


OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL

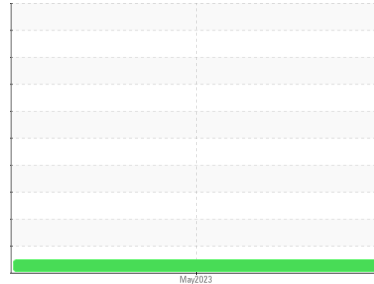

Machine Id
333131
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 10W30 (--- QTS)

DIAGNOSIS

Recommendation

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

Tests indicate that there is no fuel present in the oil. There is no indication of any contamination in the oil.

Fluid Condition

The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

SAMPLE INFORMATION

	method	limit/base	current	history 1	history 2
Sample Number	Client Info		PCA0083817	---	---
Sample Date	Client Info		31 May 2023	---	---
Machine Age	mls	Client Info	17365	---	---
Oil Age	mls	Client Info	17365	---	---
Oil Changed	Client Info		Changed	---	---
Sample Status			NORMAL	---	---

CONTAMINATION

	method	limit/base	current	history 1	history 2
Glycol	WC Method		NEG	---	---

WEAR METALS

	method	limit/base	current	history 1	history 2
Iron	ppm	ASTM D5185m >100	56	---	---
Chromium	ppm	ASTM D5185m >20	3	---	---
Nickel	ppm	ASTM D5185m >4	2	---	---
Titanium	ppm	ASTM D5185m	6	---	---
Silver	ppm	ASTM D5185m >3	1	---	---
Aluminum	ppm	ASTM D5185m >20	14	---	---
Lead	ppm	ASTM D5185m >40	5	---	---
Copper	ppm	ASTM D5185m >330	36	---	---
Tin	ppm	ASTM D5185m >15	5	---	---
Vanadium	ppm	ASTM D5185m	1	---	---
Cadmium	ppm	ASTM D5185m	2	---	---

ADDITIVES

	method	limit/base	current	history 1	history 2
Boron	ppm	ASTM D5185m 2	43	---	---
Barium	ppm	ASTM D5185m 0	19	---	---
Molybdenum	ppm	ASTM D5185m 50	40	---	---
Manganese	ppm	ASTM D5185m 0	9	---	---
Magnesium	ppm	ASTM D5185m 950	414	---	---
Calcium	ppm	ASTM D5185m 1050	1339	---	---
Phosphorus	ppm	ASTM D5185m 995	631	---	---
Zinc	ppm	ASTM D5185m 1180	778	---	---
Sulfur	ppm	ASTM D5185m 2600	2299	---	---

CONTAMINANTS

	method	limit/base	current	history 1	history 2
Silicon	ppm	ASTM D5185m >25	10	---	---
Sodium	ppm	ASTM D5185m	7	---	---
Potassium	ppm	ASTM D5185m >20	25	---	---
Fuel	%	ASTM D3524 >5	0.4	---	---




INFRA-RED

	method	limit/base	current	history 1	history 2
Soot %	%	*ASTM D7844 >3	0.4	---	---
Nitration	Abs/cm	*ASTM D7624 >20	10.3	---	---
Sulfation	Abs/.1mm	*ASTM D7415 >30	23.2	---	---

FLUID DEGRADATION

	method	limit/base	current	history 1	history 2
Oxidation	Abs/.1mm	*ASTM D7414 >25	21.7	---	---
Base Number (BN)	mg KOH/g	ASTM D2896	9.9	---	---









OIL ANALYSIS REPORT

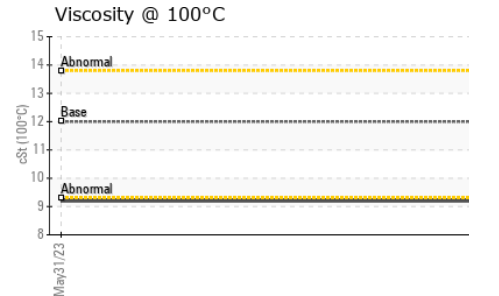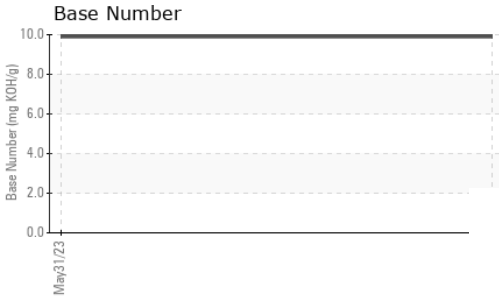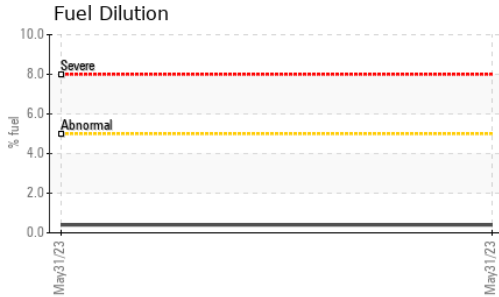

VISUAL	method	limit/base	current	history 1	history 2	
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---
Precipitate	scalar	*Visual	NONE	NONE	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---
Free Water	scalar	*Visual		NEG	---	---

FLUID PROPERTIES	method	limit/base	current	history 1	history 2	
Visc @ 100°C	cSt	ASTM D445	12.00	9.2	---	---

GRAPHS

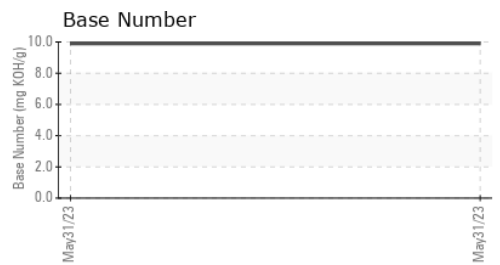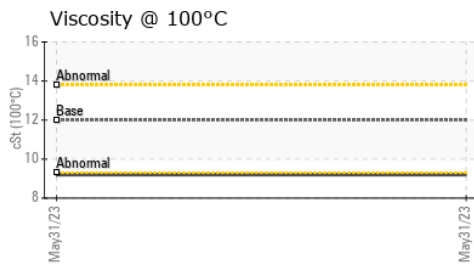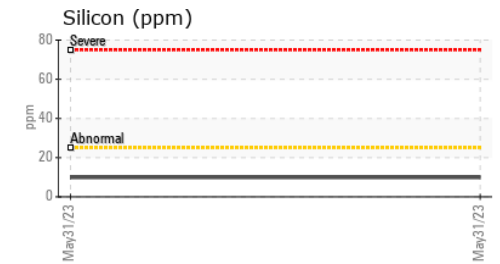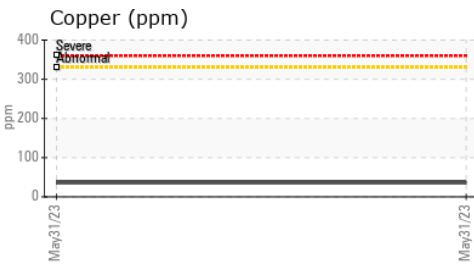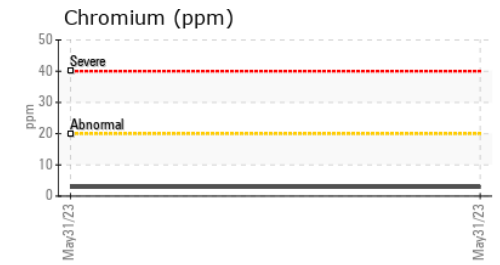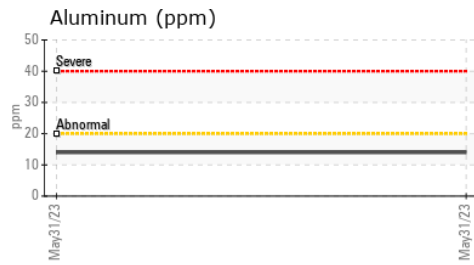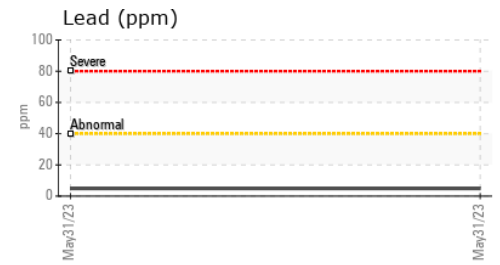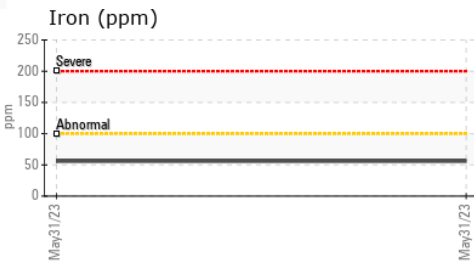

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0083817 **Received** : 03 Jul 2023
Lab Number : **05888801** **Diagnosed** : 06 Jul 2023
Unique Number : 10539284 **Diagnostician** : Angela Borella
Test Package : MOB 1 (Additional Tests: FuelDilution, PercentFuel, TBN)

MILLER TRUCK LEASING #123
 66 KELLER AVENUE
 LANCASTER, PA
 US 17601
 Contact: RON ROBERTS
 roberts@millertransgroup.com
 T: (717)945-6205
 F: (717)945-5818

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)