




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

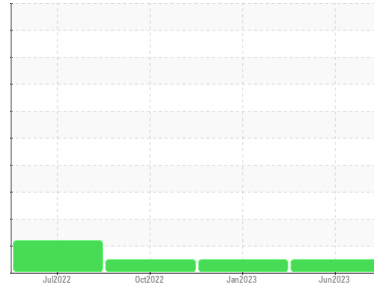

Machine Id  
**729076**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history 1	history 2
Sample Number	Client Info		<b>GFL0015795</b>	GFL0067565	GFL0055950
Sample Date	Client Info		<b>28 Jun 2023</b>	24 Jan 2023	17 Oct 2022
Machine Age	mls	Client Info	<b>129725</b>	10842	10246
Oil Age	mls	Client Info	<b>129725</b>	0	600
Oil Changed	Client Info		<b>N/A</b>	N/A	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history 1	history 2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history 1	history 2
Iron	ppm	ASTM D5185m >80	<b>12</b>	4	14
Chromium	ppm	ASTM D5185m >5	<b>2</b>	<1	<1
Nickel	ppm	ASTM D5185m >2	<b>1</b>	0	0
Titanium	ppm	ASTM D5185m	<b>2</b>	0	0
Silver	ppm	ASTM D5185m >3	<b>2</b>	0	0
Aluminum	ppm	ASTM D5185m >30	<b>5</b>	1	4
Lead	ppm	ASTM D5185m >30	<b>5</b>	0	0
Copper	ppm	ASTM D5185m >150	<b>2</b>	<1	2
Tin	ppm	ASTM D5185m >5	<b>2</b>	<1	<1
Vanadium	ppm	ASTM D5185m	<b>1</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>2</b>	0	0

## ADDITIVES

	method	limit/base	current	history 1	history 2
Boron	ppm	ASTM D5185m 0	<b>6</b>	90	31
Barium	ppm	ASTM D5185m 0	<b>19</b>	0	0
Molybdenum	ppm	ASTM D5185m 60	<b>46</b>	5	18
Manganese	ppm	ASTM D5185m 0	<b>2</b>	<1	<1
Magnesium	ppm	ASTM D5185m 1010	<b>700</b>	610	613
Calcium	ppm	ASTM D5185m 1070	<b>871</b>	1317	1458
Phosphorus	ppm	ASTM D5185m 1150	<b>759</b>	664	719
Zinc	ppm	ASTM D5185m 1270	<b>964</b>	765	809
Sulfur	ppm	ASTM D5185m 2060	<b>2667</b>	3562	3452

## CONTAMINANTS

	method	limit/base	current	history 1	history 2
Silicon	ppm	ASTM D5185m >20	<b>7</b>	5	6
Sodium	ppm	ASTM D5185m	<b>6</b>	3	8
Potassium	ppm	ASTM D5185m >20	<b>7</b>	2	2

## INFRA-RED



	method	limit/base	current	history 1	history 2
Soot %	%	*ASTM D7844 >3	<b>0.4</b>	0.1	0.5
Nitration	Abs/cm	*ASTM D7624 >20	<b>9.3</b>	7.7	11.5
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>19.8</b>	18.4	23.5

## FLUID DEGRADATION

	method	limit/base	current	history 1	history 2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>17.1</b>	12.2	20.4
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>8.6</b>	9.4	8.1











# OIL ANALYSIS REPORT

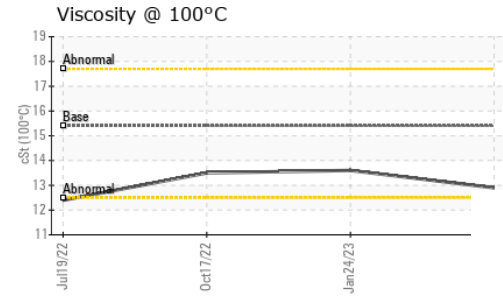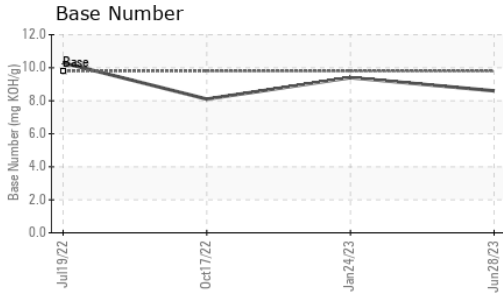

VISUAL	method	limit/base	current	history 1	history 2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history 1	history 2	
Visc @ 100°C	cSt	ASTM D445	15.4	12.9	13.6	13.5

## GRAPHS

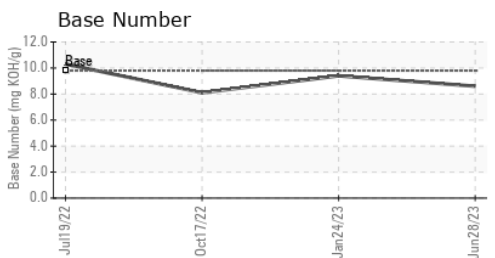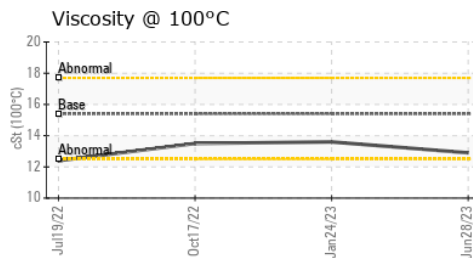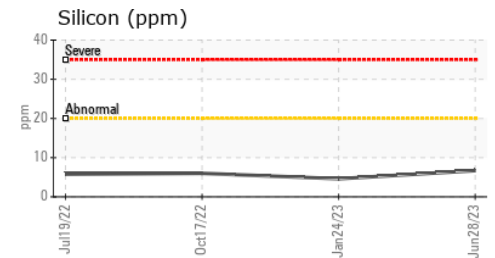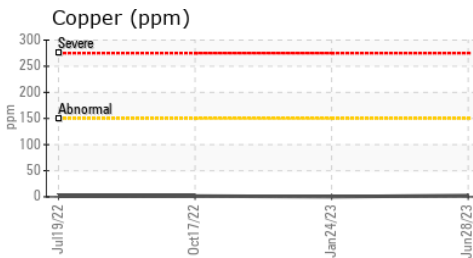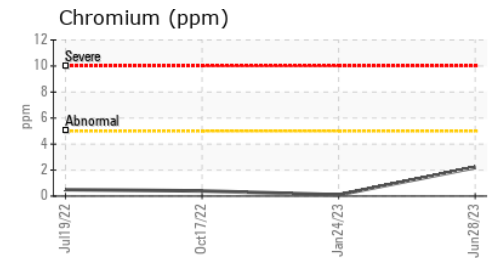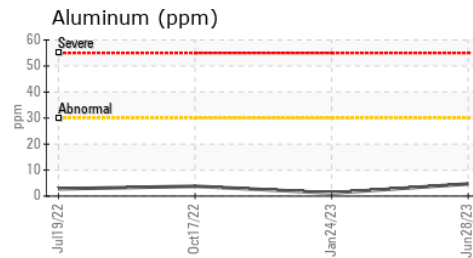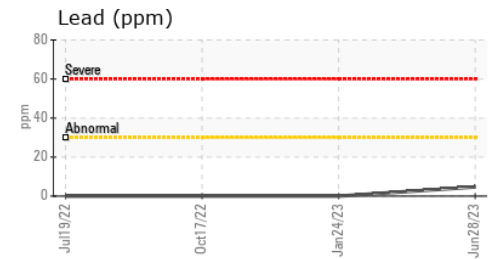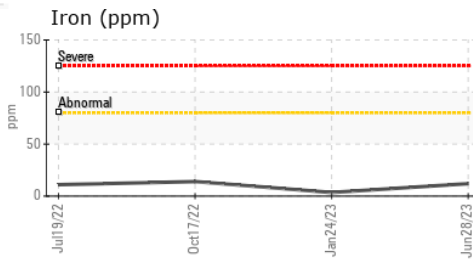

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0015795 **Received** : 03 Jul 2023  
**Lab Number** : 05888811 **Diagnosed** : 05 Jul 2023  
**Unique Number** : 10539294 **Diagnostician** : Wes Davis  
**Test Package** : MOB 2

1241 KING SETTLEMENT RD  
 ALPENA, MI  
 US 49707  
 Contact: DYLAN TOLAN  
 dylan.tolan@gflenv.com  
 T: (989)854-7203  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)