



OIL ANALYSIS REPORT

Sample Rating Trend


GLYCOL



Machine Id
727022

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

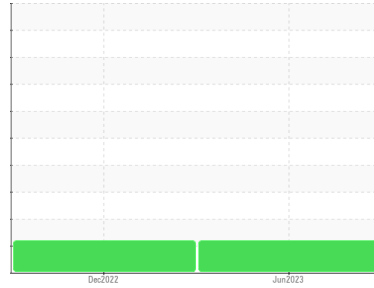

DIAGNOSIS

▲ Recommendation

We advise that you check for the source of the coolant leak. Check for low coolant level. We recommend an early resample to monitor this condition.

Wear

All component wear rates are normal.

Contamination

Sodium and/or potassium levels are high.

▲ Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil.

SAMPLE INFORMATION		method	limit/base	current	history 1	history 2
Sample Number	Client Info			GFL0015784	GFL0067634	---
Sample Date	Client Info			28 Jun 2023	27 Dec 2022	---
Machine Age	hrs	Client Info		12880	12192	---
Oil Age	hrs	Client Info		12192	0	---
Oil Changed	Client Info			N/A	N/A	---
Sample Status				ABNORMAL	ABNORMAL	---

CONTAMINATION		method	limit/base	current	history 1	history 2
Fuel	WC Method		>5	<1.0	<1.0	---

WEAR METALS		method	limit/base	current	history 1	history 2
Iron	ppm	ASTM D5185m	>100	41	37	---
Chromium	ppm	ASTM D5185m	>20	3	<1	---
Nickel	ppm	ASTM D5185m	>4	1	0	---
Titanium	ppm	ASTM D5185m		2	0	---
Silver	ppm	ASTM D5185m	>3	2	0	---
Aluminum	ppm	ASTM D5185m	>20	6	4	---
Lead	ppm	ASTM D5185m	>40	4	0	---
Copper	ppm	ASTM D5185m	>330	3	2	---
Tin	ppm	ASTM D5185m	>15	2	<1	---
Vanadium	ppm	ASTM D5185m		1	0	---
Cadmium	ppm	ASTM D5185m		2	0	---

ADDITIVES		method	limit/base	current	history 1	history 2
Boron	ppm	ASTM D5185m	0	14	91	---
Barium	ppm	ASTM D5185m	0	0	0	---
Molybdenum	ppm	ASTM D5185m	60	69	71	---
Manganese	ppm	ASTM D5185m	0	2	<1	---
Magnesium	ppm	ASTM D5185m	1010	926	826	---
Calcium	ppm	ASTM D5185m	1070	1080	1104	---
Phosphorus	ppm	ASTM D5185m	1150	965	948	---
Zinc	ppm	ASTM D5185m	1270	1222	1128	---
Sulfur	ppm	ASTM D5185m	2060	3518	3489	---




CONTAMINANTS		method	limit/base	current	history 1	history 2
Silicon	ppm	ASTM D5185m	>25	12	5	---
Sodium	ppm	ASTM D5185m		▲ 418	▲ 128	---
Potassium	ppm	ASTM D5185m	>20	17	9	---
Glycol	%	*ASTM D2982		NEG	NEG	---

INFRA-RED		method	limit/base	current	history 1	history 2
Soot %	%	*ASTM D7844	>3	1	0.9	---
Nitration	Abs/cm	*ASTM D7624	>20	10.8	9.4	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	20.7	19.7	---

FLUID DEGRADATION		method	limit/base	current	history 1	history 2
Oxidation	Abs/.1mm	*ASTM D7414	>25	15.8	14.6	---
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	9.9	9.8	---











OIL ANALYSIS REPORT

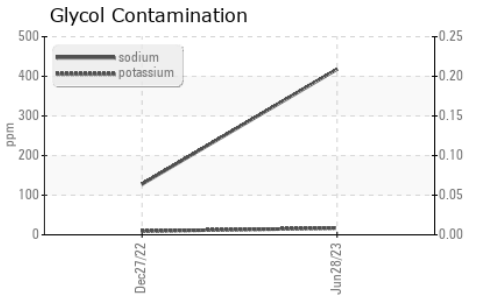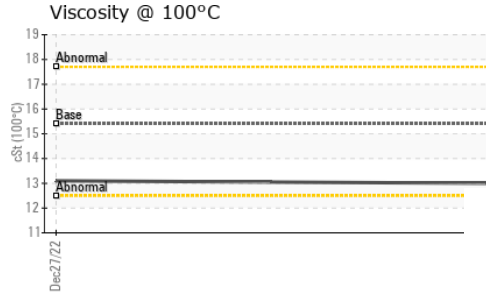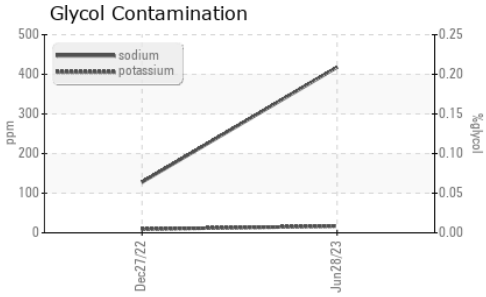

VISUAL	method	limit/base	current	history 1	history 2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history 1	history 2	
Visc @ 100°C	cSt	ASTM D445	15.4	13.0	13.1	---

GRAPHS

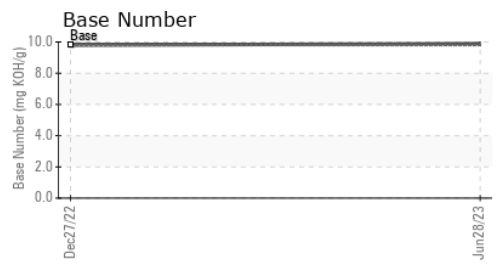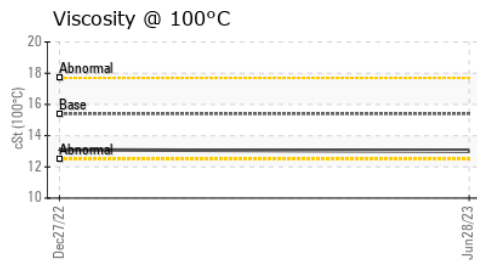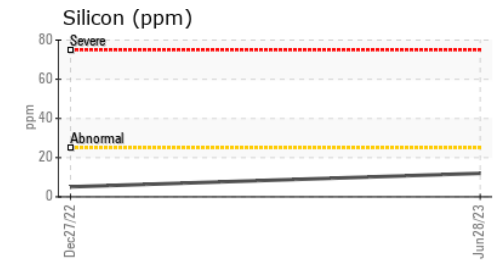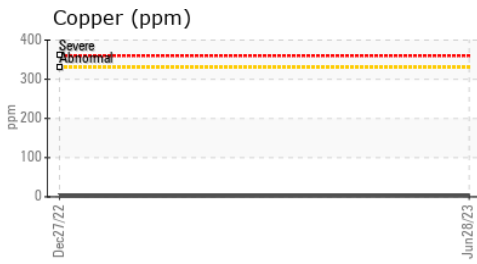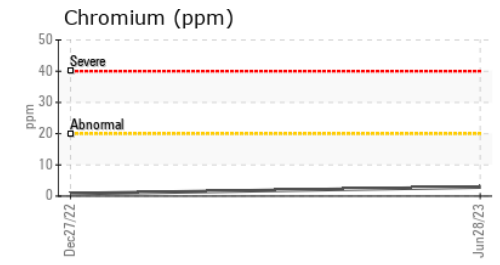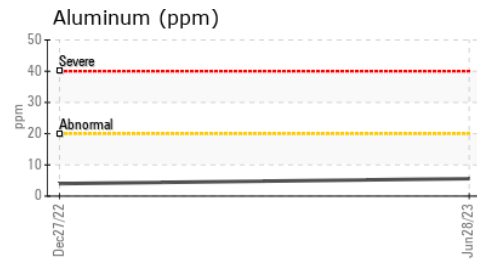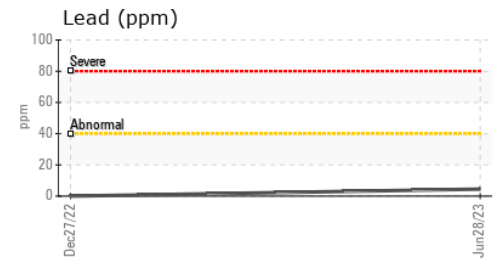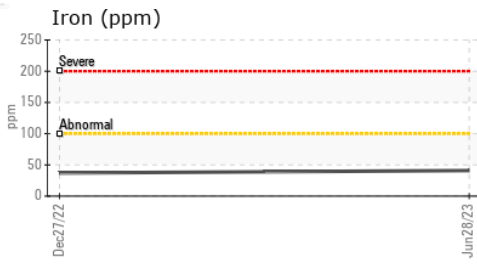

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0015784 **Received** : 03 Jul 2023
Lab Number : 05888887 **Diagnosed** : 06 Jul 2023
Unique Number : 10539370 **Diagnostician** : Jonathan Hester
Test Package : MOB 2 (Additional Tests: Glycol)

GFL Environmental - 463 - Cheboygan
 501 N. Western Ave
 Cheboygan, MI
 US 49721
 Contact: Chris Gee
 cgee@gflenv.com
 T: (231)597-8553
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)