




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

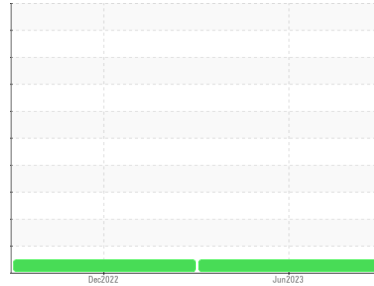

Machine Id
727162

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history 1	history 2
Sample Number	Client Info			GFL0015781	GFL0067637	---
Sample Date	Client Info			28 Jun 2023	27 Dec 2022	---
Machine Age	hrs	Client Info		8468	0	---
Oil Age	hrs	Client Info		0	0	---
Oil Changed	Client Info			N/A	N/A	---
Sample Status				NORMAL	NORMAL	---

CONTAMINATION		method	limit/base	current	history 1	history 2
Fuel	WC Method	>5		<1.0	<1.0	---
Glycol	WC Method			NEG	NEG	---

WEAR METALS		method	limit/base	current	history 1	history 2
Iron	ppm	ASTM D5185m	>100	12	38	---
Chromium	ppm	ASTM D5185m	>20	2	1	---
Nickel	ppm	ASTM D5185m	>4	1	0	---
Titanium	ppm	ASTM D5185m		2	1	---
Silver	ppm	ASTM D5185m	>3	2	0	---
Aluminum	ppm	ASTM D5185m	>20	3	3	---
Lead	ppm	ASTM D5185m	>40	4	<1	---
Copper	ppm	ASTM D5185m	>330	2	<1	---
Tin	ppm	ASTM D5185m	>15	2	0	---
Vanadium	ppm	ASTM D5185m		1	0	---
Cadmium	ppm	ASTM D5185m		2	0	---

ADDITIVES		method	limit/base	current	history 1	history 2
Boron	ppm	ASTM D5185m	0	4	91	---
Barium	ppm	ASTM D5185m	0	0	0	---
Molybdenum	ppm	ASTM D5185m	60	53	63	---
Manganese	ppm	ASTM D5185m	0	2	<1	---
Magnesium	ppm	ASTM D5185m	1010	907	868	---
Calcium	ppm	ASTM D5185m	1070	1041	1141	---
Phosphorus	ppm	ASTM D5185m	1150	941	993	---
Zinc	ppm	ASTM D5185m	1270	1167	1188	---
Sulfur	ppm	ASTM D5185m	2060	3426	3507	---



CONTAMINANTS		method	limit/base	current	history 1	history 2
Silicon	ppm	ASTM D5185m	>25	5	4	---
Sodium	ppm	ASTM D5185m		5	3	---
Potassium	ppm	ASTM D5185m	>20	6	2	---

INFRA-RED		method	limit/base	current	history 1	history 2
Soot %	%	*ASTM D7844	>3	1	2.1	---
Nitration	Abs/cm	*ASTM D7624	>20	7.6	10.8	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	20.1	22.8	---

FLUID DEGRADATION		method	limit/base	current	history 1	history 2
Oxidation	Abs/.1mm	*ASTM D7414	>25	14.8	18.2	---
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	9.9	10.2	---











OIL ANALYSIS REPORT

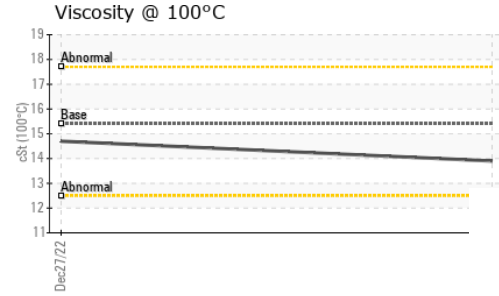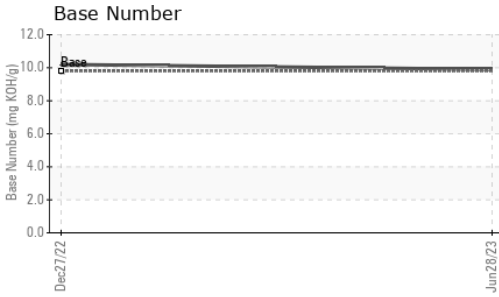

VISUAL	method	limit/base	current	history 1	history 2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history 1	history 2
Visc @ 100°C	cSt	ASTM D445	15.4	13.9	14.7

GRAPHS

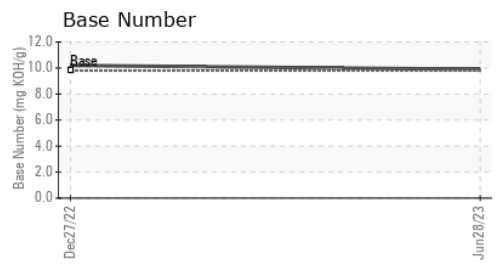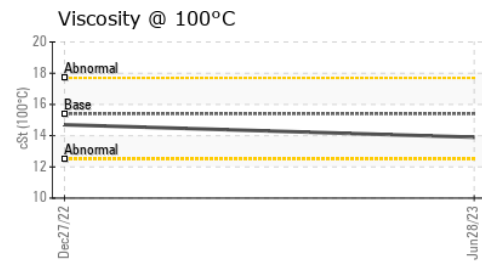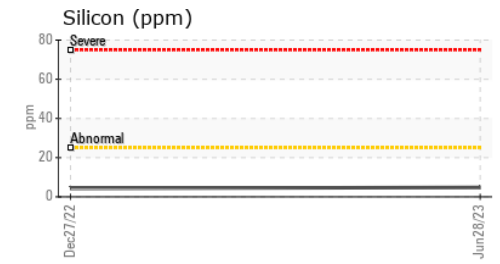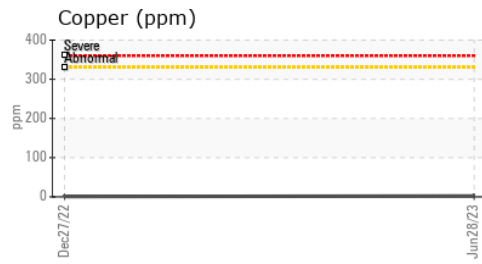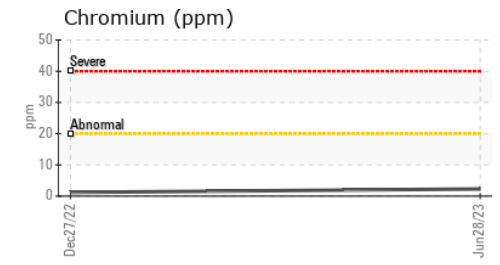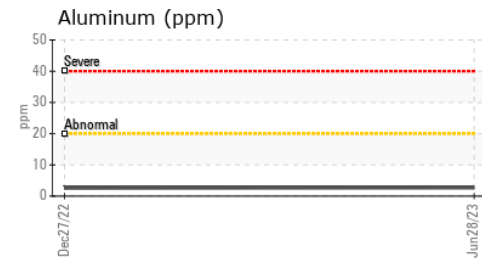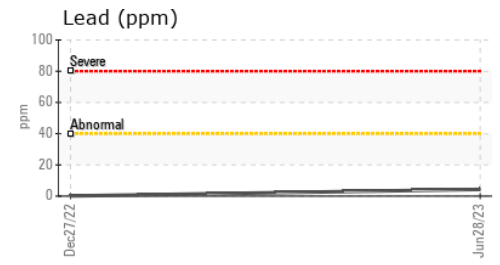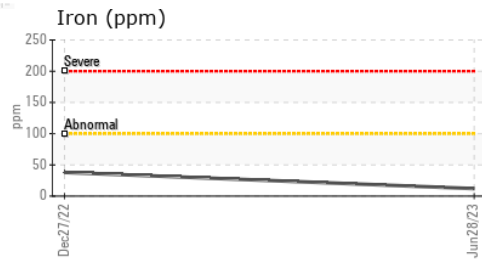

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0015781 **Received** : 03 Jul 2023
Lab Number : 05888900 **Diagnosed** : 05 Jul 2023
Unique Number : 10539383 **Diagnostician** : Wes Davis
Test Package : MOB 2

GFL Environmental - 463 - Cheboygan
 501 N. Western Ave
 Cheboygan, MI
 US 49721
 Contact: Chris Gee
 cgee@gflenv.com
 T: (231)597-8553
 F:

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)