




# OIL ANALYSIS REPORT

Sample Rating Trend

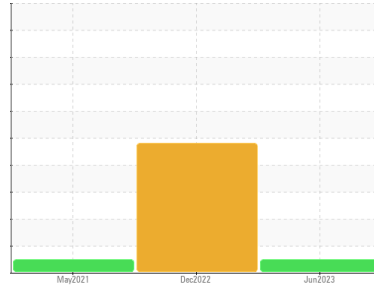

**NORMAL**



Machine Id  
**2223M**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

Metal levels are typical for a new component breaking in.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history 1	history 2
Sample Number	Client Info	<b>GFL0015782</b>	GFL0067627	GFL0015818
Sample Date	Client Info	<b>28 Jun 2023</b>	27 Dec 2022	12 May 2021
Machine Age	hrs	<b>215</b>	0	0
Oil Age	hrs	<b>0</b>	0	600
Oil Changed	Client Info	<b>N/A</b>	N/A	N/A
Sample Status		<b>NORMAL</b>	SEVERE	NORMAL

## CONTAMINATION

method	limit/base	current	history 1	history 2
Fuel	WC Method >5	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history 1	history 2
Iron	ppm ASTM D5185m >100	<b>31</b>	5	43
Chromium	ppm ASTM D5185m >20	<b>2</b>	0	1
Nickel	ppm ASTM D5185m >4	<b>1</b>	0	<1
Titanium	ppm ASTM D5185m	<b>2</b>	0	<1
Silver	ppm ASTM D5185m >3	<b>2</b>	0	<1
Aluminum	ppm ASTM D5185m >20	<b>2</b>	0	3
Lead	ppm ASTM D5185m >40	<b>5</b>	<1	18
Copper	ppm ASTM D5185m >330	<b>4</b>	<1	27
Tin	ppm ASTM D5185m >15	<b>2</b>	<1	1
Antimony	ppm ASTM D5185m	<b>---</b>	---	0
Vanadium	ppm ASTM D5185m	<b>1</b>	0	0
Cadmium	ppm ASTM D5185m	<b>2</b>	0	0

## ADDITIVES

method	limit/base	current	history 1	history 2
Boron	ppm ASTM D5185m 0	<b>4</b>	97	70
Barium	ppm ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm ASTM D5185m 60	<b>54</b>	62	15
Manganese	ppm ASTM D5185m 0	<b>2</b>	0	<1
Magnesium	ppm ASTM D5185m 1010	<b>928</b>	875	203
Calcium	ppm ASTM D5185m 1070	<b>1075</b>	1092	2123
Phosphorus	ppm ASTM D5185m 1150	<b>957</b>	1009	978
Zinc	ppm ASTM D5185m 1270	<b>1193</b>	1176	1202
Sulfur	ppm ASTM D5185m 2060	<b>3460</b>	3639	2763

## CONTAMINANTS

method	limit/base	current	history 1	history 2
Silicon	ppm ASTM D5185m >25	<b>5</b>	183	4
Sodium	ppm ASTM D5185m	<b>8</b>	2	25
Potassium	ppm ASTM D5185m >20	<b>7</b>	1	21

## INFRA-RED



method	limit/base	current	history 1	history 2
Soot %	% *ASTM D7844 >3	<b>0.6</b>	0.1	1.2
Nitration	Abs/cm *ASTM D7624 >20	<b>8.2</b>	4.7	13
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>20.7</b>	17.5	32.6

## FLUID DEGRADATION

method	limit/base	current	history 1	history 2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>17.1</b>	13.0	30.7
Base Number (BN)	mg KOH/g ASTM D2896 9.8	<b>9.2</b>	9.6	6.3











# OIL ANALYSIS REPORT

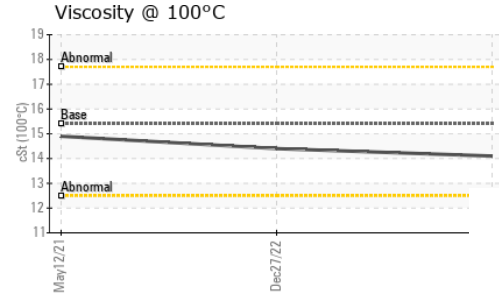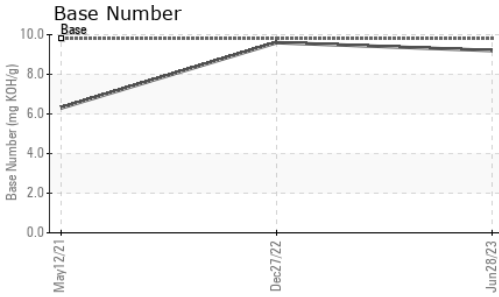

VISUAL	method	limit/base	current	history 1	history 2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history 1	history 2
Visc @ 100°C	cSt	ASTM D445	15.4	14.1	14.4

## GRAPHS

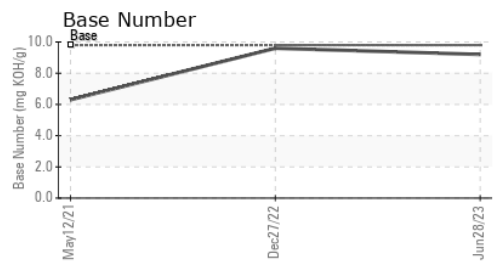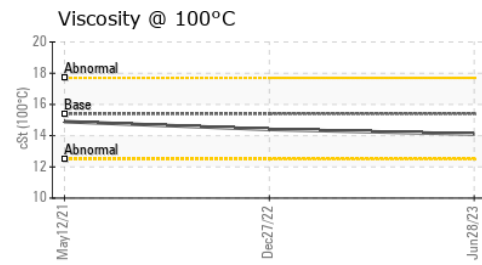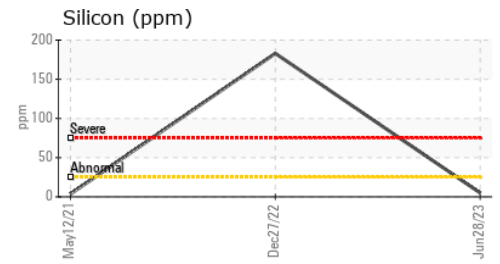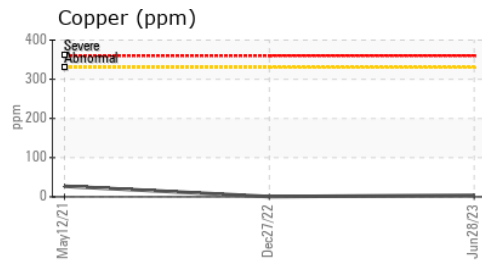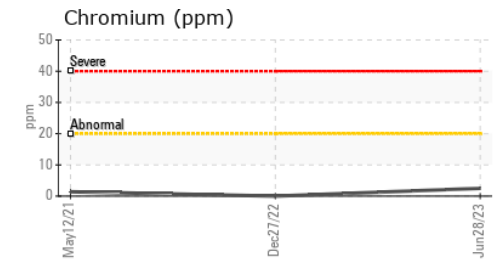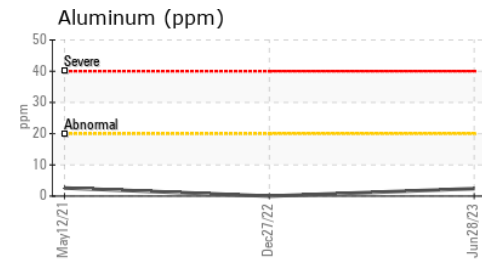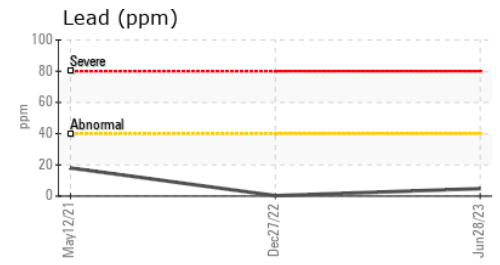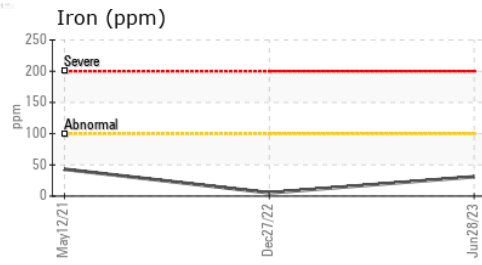

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0015782 **Received** : 03 Jul 2023  
**Lab Number** : 05888904 **Diagnosed** : 05 Jul 2023  
**Unique Number** : 10539387 **Diagnostician** : Wes Davis  
**Test Package** : MOB 2

**GFL Environmental - 463 - Cheboygan**  
 501 N. Western Ave  
 Cheboygan, MI  
 US 49721  
 Contact: Chris Gee  
 cgee@gflenv.com  
 T: (231)597-8553  
 F:

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)