




# OIL ANALYSIS REPORT

Sample Rating Trend

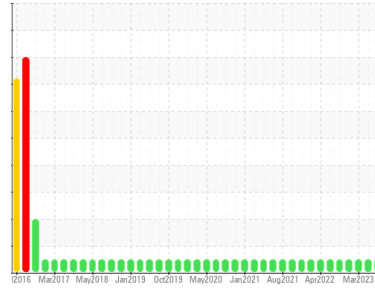

**NORMAL**



Machine Id  
**2636**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history 1	history 2
Sample Number	Client Info		<b>GFL0061895</b>	GFL0061889	GFL0061871
Sample Date	Client Info		<b>30 Jun 2023</b>	12 Jun 2023	31 Mar 2023
Machine Age	hrs	Client Info	<b>19878</b>	19727	19164
Oil Age	hrs	Client Info	<b>19878</b>	19727	19164
Oil Changed	Client Info		<b>Not Chngd</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history 1	history 2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history 1	history 2
Iron	ppm	ASTM D5185m >165	<b>4</b>	3	6
Chromium	ppm	ASTM D5185m >5	<b>2</b>	0	<1
Nickel	ppm	ASTM D5185m >4	<b>1</b>	0	0
Titanium	ppm	ASTM D5185m >2	<b>2</b>	0	0
Silver	ppm	ASTM D5185m >2	<b>2</b>	0	<1
Aluminum	ppm	ASTM D5185m >20	<b>2</b>	0	1
Lead	ppm	ASTM D5185m >150	<b>4</b>	0	0
Copper	ppm	ASTM D5185m >90	<b>2</b>	<1	<1
Tin	ppm	ASTM D5185m >5	<b>2</b>	0	0
Vanadium	ppm	ASTM D5185m	<b>1</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>2</b>	0	0

## ADDITIVES

	method	limit/base	current	history 1	history 2
Boron	ppm	ASTM D5185m 0	<b>11</b>	10	10
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 60	<b>55</b>	59	63
Manganese	ppm	ASTM D5185m 0	<b>2</b>	<1	<1
Magnesium	ppm	ASTM D5185m 1010	<b>950</b>	977	1037
Calcium	ppm	ASTM D5185m 1070	<b>1087</b>	1138	1169
Phosphorus	ppm	ASTM D5185m 1150	<b>993</b>	1036	1111
Zinc	ppm	ASTM D5185m 1270	<b>1214</b>	1275	1364
Sulfur	ppm	ASTM D5185m 2060	<b>3693</b>	3856	4259

## CONTAMINANTS

	method	limit/base	current	history 1	history 2
Silicon	ppm	ASTM D5185m >35	<b>4</b>	3	3
Sodium	ppm	ASTM D5185m	<b>4</b>	3	2
Potassium	ppm	ASTM D5185m >20	<b>6</b>	3	1

## INFRA-RED



	method	limit/base	current	history 1	history 2
Soot %	%	*ASTM D7844 >7.5	<b>0.1</b>	0.2	0.3
Nitration	Abs/cm	*ASTM D7624 >20	<b>5.6</b>	6.3	7.2
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>17.9</b>	18.8	18.8

## FLUID DEGRADATION

	method	limit/base	current	history 1	history 2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>13.5</b>	15.2	14.4
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>9.3</b>	8.2	8.7







# OIL ANALYSIS REPORT

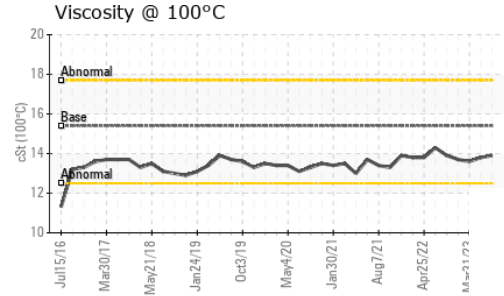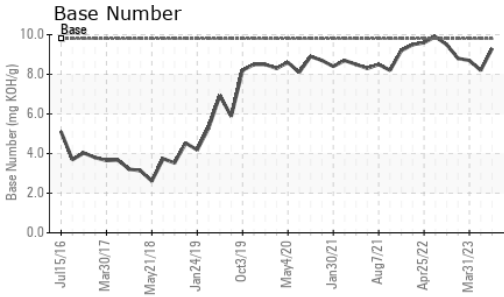

VISUAL	method	limit/base	current	history 1	history 2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history 1	history 2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.9</b>	13.8	13.6

## GRAPHS

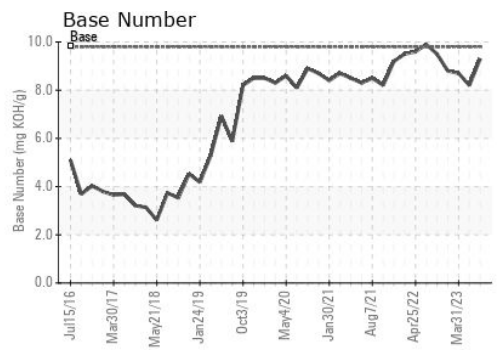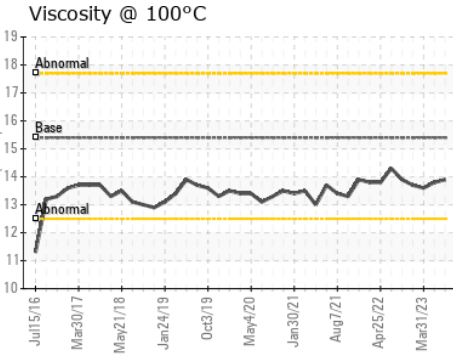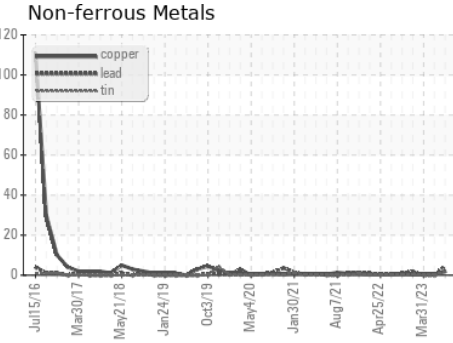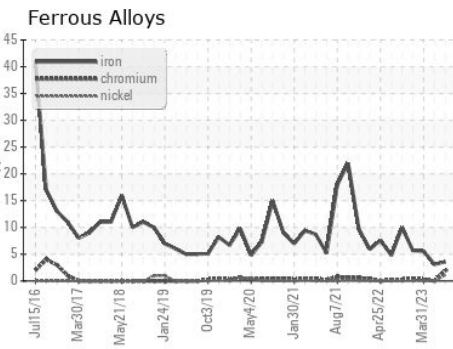

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0061895 **Received** : 03 Jul 2023  
**Lab Number** : **05888917** **Diagnosed** : 05 Jul 2023  
**Unique Number** : 10539400 **Diagnostician** : Don Baldrige  
**Test Package** : FLEET

**GFL Environmental - 044 - Elizabeth City**  
 657 Old US 17  
 Elizabeth City, NC  
 US 27909  
 Contact: TOM BAIRD  
 tom.baird@gflenv.com  
 T: (252)562-2645  
 F: (252)264-4411

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)