


PROBLEM SUMMARY





Machine Id 235003 Component

Diesel Engine

PETRO CANADA DURON SHP 15W40 (9 GAL)

COMPONENT CONDITION SUMMARY

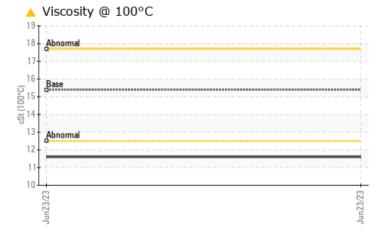

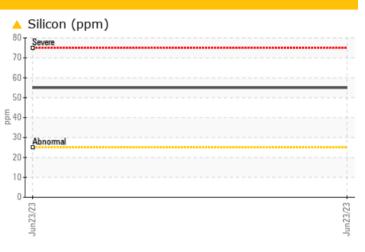

RECOMMENDATION

Resample at the next service interval to monitor.

PROBLEMAT	FIC TES	T RESULT	S		
Sample Status				ABNORMAL	
Silicon	ppm	ASTM D5185m	>25	🔺 55	
Visc @ 100°C	cSt	ASTM D445	15.4	11.6	

Customer Id: ORIBET Sample No.: PCA0098109 Lab Number: 05889570 Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data: Angela Borella +1 800-237-1369 angela.borella@wearcheckusa.com

To change component or sample information: Customer Service +1 1-800-237-1369 <u>customerservice@wearcheck.com</u> There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS



OIL ANALYSIS REPORT

Sample Rating Trend

DIRT



Machine Id 235003

Component Diesel Engine

PETRO CANADA DURON SHP 15W40 (9 GAL)

DIAC	515

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.


Contamination

Elemental level of silicon (Si) above normal indicating ingress of seal material. Tests indicate that there is no fuel present in the oil.

Fluid Condition

The oil viscosity is lower than normal. Confirm oil type.

ON SHP 15W40 (9	9 GAL)			Jun2023		
SAMPLE INFORM	MATION	method	limit/base	current	history 1	history 2
Sample Number		Client Info		PCA0098109		
Sample Date		Client Info		23 Jun 2023		
Machine Age	hrs	Client Info		1598		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		Not Changd		
Sample Status				ABNORMAL		
CONTAMINAT	ION	method	limit/base	current	history 1	history 2
Glycol		WC Method		NEG		
WEAR METALS	S	method	limit/base	current	history 1	history 2
ron	ppm	ASTM D5185m	>120	72		
Chromium	ppm	ASTM D5185m	>20	2		
Nickel	ppm	ASTM D5185m	>5	18		
Titanium	ppm	ASTM D5185m	>2	0		
Silver	ppm	ASTM D5185m	>2	0		
Aluminum	ppm	ASTM D5185m	>20	2		
Lead	ppm	ASTM D5185m	>40	<1		
Copper	ppm	ASTM D5185m	>330	153		
Гin	ppm	ASTM D5185m	>15	5		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history 1	history 2
Boron	ppm	ASTM D5185m	0	28		
Barium	ppm	ASTM D5185m	0	0		
Volybdenum	ppm	ASTM D5185m	60	99		
Vanganese	ppm	ASTM D5185m	0	6		
Magnesium	ppm	ASTM D5185m	1010	731		
Calcium	ppm	ASTM D5185m	1070	1299		
Phosphorus	ppm	ASTM D5185m	1150	697		
Zinc	ppm	ASTM D5185m	1270	863		
Sulfur	ppm	ASTM D5185m				
		AOTIVI DOTODIII	2060	2338		
CONTAMINAN		method	2060 limit/base	2338 current	 history 1	history 2
		method ASTM D5185m	limit/base	current		
Silicon	TS	method	limit/base	current		
Silicon Sodium Potassium	TS ppm ppm ppm	method ASTM D5185m ASTM D5185m ASTM D5185m	limit/base >25 >20	current ▲ 55 5 6	history 1	history 2
Silicon Sodium Potassium Fuel	TS ppm ppm	method ASTM D5185m ASTM D5185m	limit/base >25 >20 >3.0	current ▲ 55 5	history 1 	history 2
Silicon Sodium Potassium	TS ppm ppm ppm	method ASTM D5185m ASTM D5185m ASTM D5185m	limit/base >25 >20	current ▲ 55 5 6	history 1 	history 2
Silicon Sodium Potassium Fuel INFRA-RED	TS ppm ppm ppm	method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D3524	limit/base >25 >20 >3.0	Current ▲ 55 5 6 0.3	history 1 	history 2
Silicon Sodium Potassium Fuel INFRA-RED Soot % Nitration	TS ppm ppm ppm %	method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D3524 method	limit/base >25 >20 >3.0 limit/base	current ▲ 55 5 6 0.3 current	history 1 history 1	history 2 history 2
Silicon Sodium Potassium Fuel INFRA-RED Soot % Nitration	TS ppm ppm ppm %	method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D3524 method *ASTM D7844	limit/base >25 >20 >3.0 limit/base >4	current ▲ 55 5 6 0.3 current 1.4	history 1 history 1	history 2 history 2
Silicon Sodium Potassium Fuel INFRA-RED Soot % Nitration	TS ppm ppm ppm % % Abs/cm Abs/.1mm	method ASTM D5185m ASTM D5185m ASTM D3524 ASTM D3524 *ASTM D7844 *ASTM D7624	limit/base >25 >20 >3.0 limit/base >4 >20	current ▲ 55 5 6 0.3 current 1.4 12.8	history 1 history 1 history 1	history 2 history 2
Silicon Sodium Potassium Fuel INFRA-RED Soot % Nitration Sulfation	TS ppm ppm ppm % % Abs/cm Abs/.1mm	method ASTM D5185m ASTM D5185m ASTM D3524 ASTM D3524 *ASTM D7844 *ASTM D7624	limit/base >25 >20 >3.0 limit/base >4 >20 >30	current ▲ 55 5 6 0.3 current 1.4 12.8 25.9	history 1 history 1 history 1	history 2 history 2

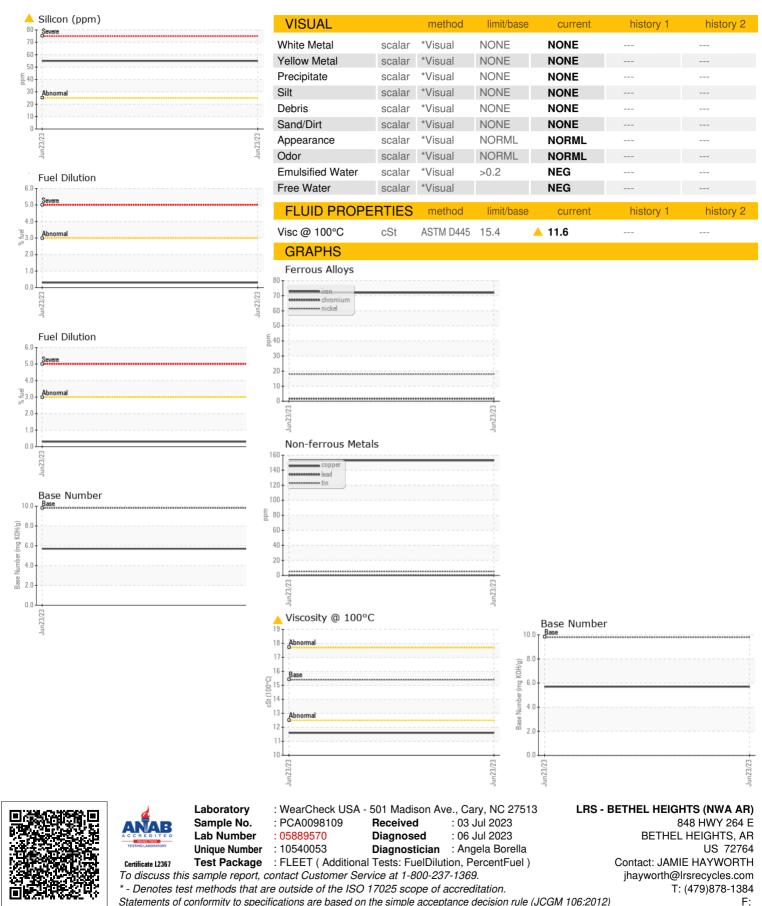

OIL ANALYSIS REPORT

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

OIL

DIAGNOSTICS

Submitted By: ALSO ORIVANAR ORIHAR ORITOP - JAMIE HAYWORTH