




OIL ANALYSIS REPORT

Sample Rating Trend

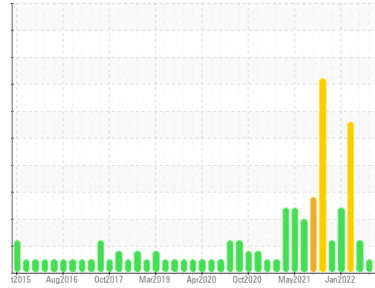

NORMAL



Machine Id
10529

Component
Diesel Engine

Fluid
DIESEL ENGINE OIL SAE 15W40 (11 GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history 1	history 2
Sample Number	Client Info	GFL0072191	GFL0066898	GFL0066908
Sample Date	Client Info	29 Jun 2023	08 Feb 2023	02 Jan 2023
Machine Age	hrs	22518	21574	21319
Oil Age	hrs	0	255	549
Oil Changed	Client Info	Changed	Changed	Changed
Sample Status		NORMAL	NORMAL	ABNORMAL

CONTAMINATION

method	limit/base	current	history 1	history 2
Fuel	WC Method >3.0	<1.0	1.4	▲ 4.6
Glycol	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history 1	history 2
Iron	ppm ASTM D5185m >75	22	23	48
Chromium	ppm ASTM D5185m >5	<1	<1	2
Nickel	ppm ASTM D5185m >4	0	0	<1
Titanium	ppm ASTM D5185m >2	0	0	0
Silver	ppm ASTM D5185m >2	0	0	0
Aluminum	ppm ASTM D5185m >15	2	5	10
Lead	ppm ASTM D5185m >25	0	0	<1
Copper	ppm ASTM D5185m >100	1	<1	1
Tin	ppm ASTM D5185m >4	0	0	<1
Vanadium	ppm ASTM D5185m	<1	0	0
Cadmium	ppm ASTM D5185m	0	0	0

ADDITIVES

method	limit/base	current	history 1	history 2
Boron	ppm ASTM D5185m 250	4	3	10
Barium	ppm ASTM D5185m 10	0	0	0
Molybdenum	ppm ASTM D5185m 100	63	61	57
Manganese	ppm ASTM D5185m	<1	<1	<1
Magnesium	ppm ASTM D5185m 450	889	891	769
Calcium	ppm ASTM D5185m 3000	1069	1054	1129
Phosphorus	ppm ASTM D5185m 1150	974	983	871
Zinc	ppm ASTM D5185m 1350	1199	1182	1079
Sulfur	ppm ASTM D5185m 4250	3374	3107	2924

CONTAMINANTS

method	limit/base	current	history 1	history 2
Silicon	ppm ASTM D5185m >25	6	6	11
Sodium	ppm ASTM D5185m >158	19	50	74
Potassium	ppm ASTM D5185m >20	5	9	15

INFRA-RED



method	limit/base	current	history 1	history 2
Soot %	% *ASTM D7844 >6	0.8	0.4	0.7
Nitration	Abs/cm *ASTM D7624 >20	8.9	7.5	9.4
Sulfation	Abs/.1mm *ASTM D7415 >30	20.1	19.0	19.2

FLUID DEGRADATION

method	limit/base	current	history 1	history 2
Oxidation	Abs/.1mm *ASTM D7414 >25	16.2	14.5	15.4
Base Number (BN)	mg KOH/g ASTM D2896 8.5	7.1	8.9	7.2







OIL ANALYSIS REPORT

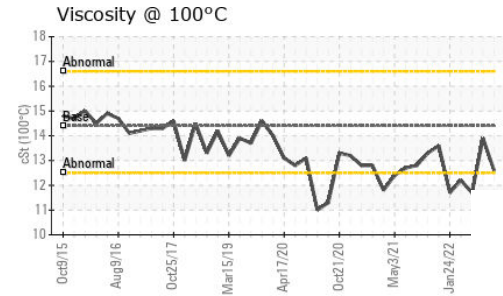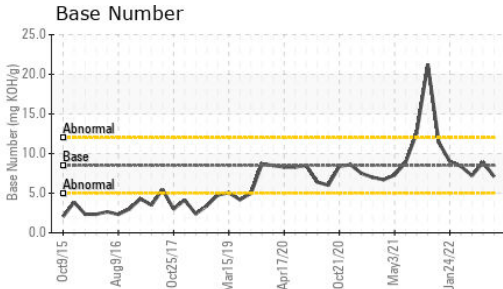

VISUAL	method	limit/base	current	history 1	history 2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history 1	history 2
Visc @ 100°C	cSt	ASTM D445	14.4	12.6	13.9 ▲ 11.7

GRAPHS

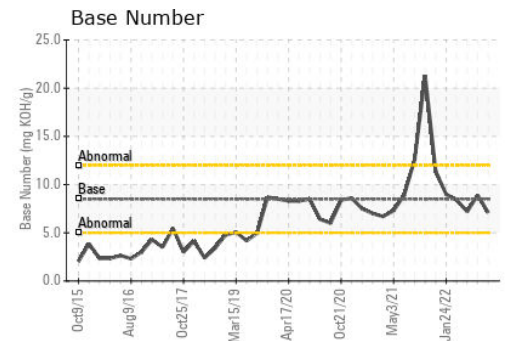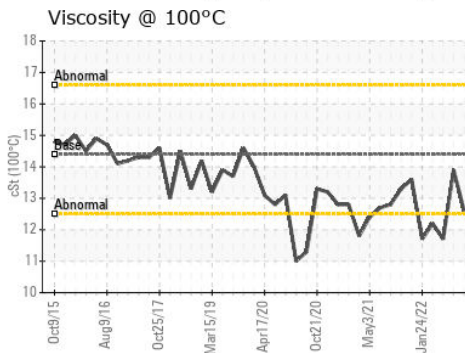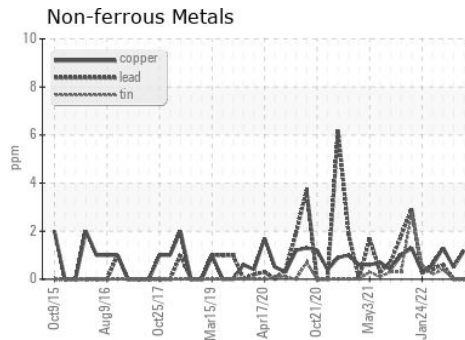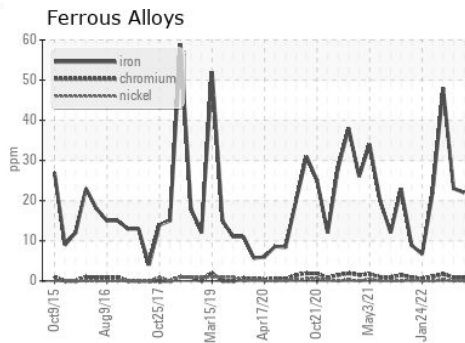

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0072191 **Received** : 03 Jul 2023
Lab Number : 05889618 **Diagnosed** : 05 Jul 2023
Unique Number : 10540101 **Diagnostician** : Wes Davis
Test Package : FLEET

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

2699 Cochran Industrial Blvd
 Douglasville, GA
 US 30127-1332
 Contact: Darrell Welch
 darrell.welch@gflenv.com
 T: (800)207-6618
 F: