




OIL ANALYSIS REPORT

Sample Rating Trend

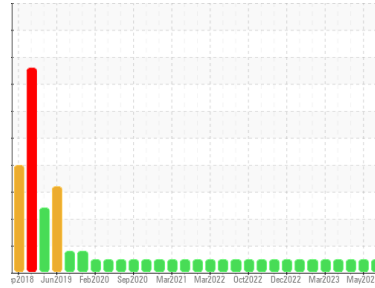

NORMAL



Machine Id

2718

Component

Diesel Engine

Fluid

PETRO CANADA DURON SHP 15W40 (40 GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history 1	history 2
Sample Number	Client Info	GFL0058540	GFL0070065	GFL0075208
Sample Date	Client Info	13 Jun 2023	22 May 2023	27 Apr 2023
Machine Age	hrs	12849	12688	12520
Oil Age	hrs	11959	11959	11959
Oil Changed	Client Info	Changed	Not Changd	Not Changd
Sample Status		NORMAL	NORMAL	NORMAL

CONTAMINATION

method	limit/base	current	history 1	history 2
Fuel	WC Method >3.0	<1.0	<1.0	<1.0
Glycol	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history 1	history 2
Iron	ppm ASTM D5185m >165	20	12	9
Chromium	ppm ASTM D5185m >5	<1	0	0
Nickel	ppm ASTM D5185m >4	0	0	0
Titanium	ppm ASTM D5185m >2	0	0	0
Silver	ppm ASTM D5185m >2	0	0	0
Aluminum	ppm ASTM D5185m >20	<1	2	1
Lead	ppm ASTM D5185m >150	0	0	0
Copper	ppm ASTM D5185m >90	2	<1	0
Tin	ppm ASTM D5185m >5	0	0	0
Vanadium	ppm ASTM D5185m	<1	0	<1
Cadmium	ppm ASTM D5185m	0	0	0

ADDITIVES

method	limit/base	current	history 1	history 2
Boron	ppm ASTM D5185m 0	0	0	3
Barium	ppm ASTM D5185m 0	0	0	0
Molybdenum	ppm ASTM D5185m 60	62	58	61
Manganese	ppm ASTM D5185m 0	<1	0	<1
Magnesium	ppm ASTM D5185m 1010	1030	972	982
Calcium	ppm ASTM D5185m 1070	1141	1136	1091
Phosphorus	ppm ASTM D5185m 1150	1056	1015	1024
Zinc	ppm ASTM D5185m 1270	1319	1295	1321
Sulfur	ppm ASTM D5185m 2060	3614	3614	3342

CONTAMINANTS

method	limit/base	current	history 1	history 2
Silicon	ppm ASTM D5185m >35	4	4	4
Sodium	ppm ASTM D5185m	5	5	3
Potassium	ppm ASTM D5185m >20	1	2	2

INFRA-RED



method	limit/base	current	history 1	history 2
Soot %	% *ASTM D7844 >7.5	0.3	0.3	0.2
Nitration	Abs/cm *ASTM D7624 >20	9.4	8.5	6.9
Sulfation	Abs/.1mm *ASTM D7415 >30	21.6	20.8	17.7

FLUID DEGRADATION

method	limit/base	current	history 1	history 2
Oxidation	Abs/.1mm *ASTM D7414 >25	18.8	16.5	14.6
Base Number (BN)	mg KOH/g ASTM D2896 9.8	7.4	8.2	7.2







OIL ANALYSIS REPORT

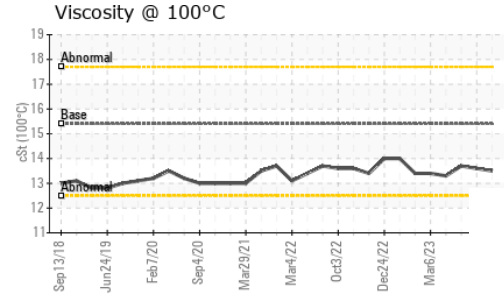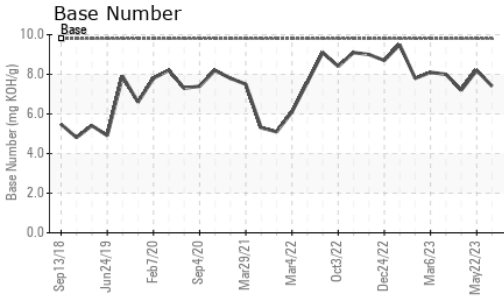

PARAMETER	method	limit/base	current	history 1	history 2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history 1	history 2	
Visc @ 100°C	cSt	ASTM D445	15.4	13.5	13.6	13.7

GRAPHS

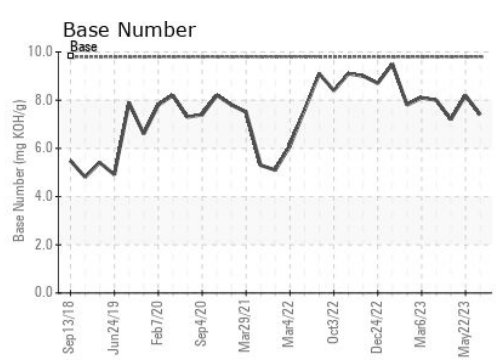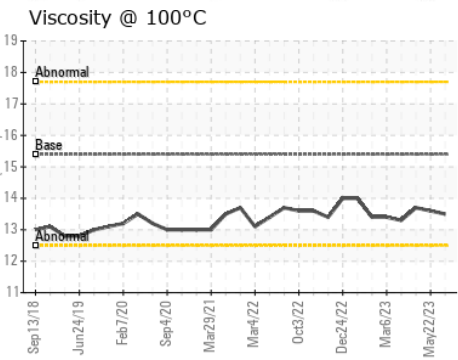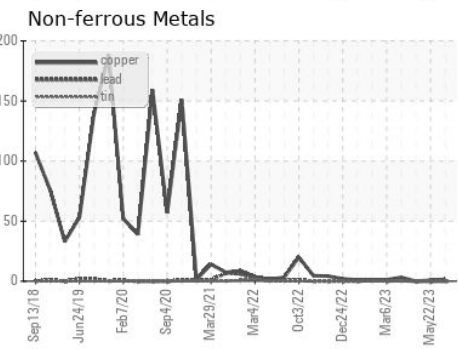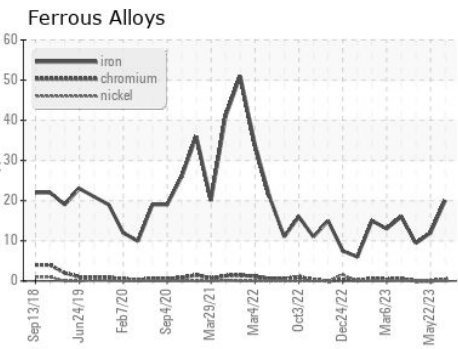

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0058540
Lab Number : 05889630
Unique Number : 10540113
Test Package : FLEET

Received : 03 Jul 2023
Diagnosed : 05 Jul 2023
Diagnostician : Wes Davis

699 Jack Miller Boulevard
 Clarksville, TN
 US 37042

Contact: ROBERT THIBAUT
 robert.thibault@gflenv.com

T: (931)552-7276
 F: (931)572-9674

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)