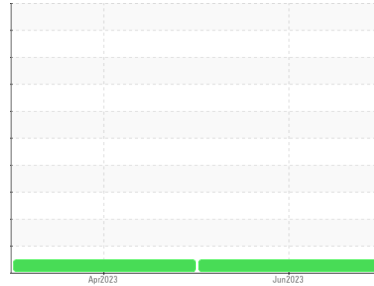


OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL


Area
(30562Z) Walgreens
 Machine Id
[Walgreens] 136A62569
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 10W30 (11 GAL)

DIAGNOSIS
Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history 1	history 2
Sample Number	Client Info			PCA0093550	PCA0096560	---
Sample Date	Client Info			27 Jun 2023	12 Apr 2023	---
Machine Age	mls	Client Info		321241	282384	---
Oil Age	mls	Client Info		282384	282384	---
Oil Changed	Client Info			Changed	Changed	---
Sample Status				NORMAL	NORMAL	---

CONTAMINATION		method	limit/base	current	history 1	history 2
Fuel	WC Method	>5		<1.0	<1.0	---
Glycol	WC Method			NEG	NEG	---

WEAR METALS		method	limit/base	current	history 1	history 2
Iron	ppm	ASTM D5185m	>80	17	19	---
Chromium	ppm	ASTM D5185m	>5	1	1	---
Nickel	ppm	ASTM D5185m	>2	<1	0	---
Titanium	ppm	ASTM D5185m		15	6	---
Silver	ppm	ASTM D5185m	>3	0	0	---
Aluminum	ppm	ASTM D5185m	>30	7	5	---
Lead	ppm	ASTM D5185m	>30	0	0	---
Copper	ppm	ASTM D5185m	>150	4	5	---
Tin	ppm	ASTM D5185m	>5	<1	<1	---
Vanadium	ppm	ASTM D5185m		<1	0	---
Cadmium	ppm	ASTM D5185m		0	0	---



ADDITIVES		method	limit/base	current	history 1	history 2
Boron	ppm	ASTM D5185m	2	6	4	---
Barium	ppm	ASTM D5185m	0	0	0	---
Molybdenum	ppm	ASTM D5185m	50	47	48	---
Manganese	ppm	ASTM D5185m	0	<1	<1	---
Magnesium	ppm	ASTM D5185m	950	757	733	---
Calcium	ppm	ASTM D5185m	1050	1318	1264	---
Phosphorus	ppm	ASTM D5185m	995	992	958	---
Zinc	ppm	ASTM D5185m	1180	1205	1144	---
Sulfur	ppm	ASTM D5185m	2600	2909	2875	---

CONTAMINANTS		method	limit/base	current	history 1	history 2
Silicon	ppm	ASTM D5185m	>20	4	4	---
Sodium	ppm	ASTM D5185m		<1	0	---
Potassium	ppm	ASTM D5185m	>20	10	11	---

INFRA-RED		method	limit/base	current	history 1	history 2
Soot %	%	*ASTM D7844	>3	1	0.9	---
Nitration	Abs/cm	*ASTM D7624	>20	9.8	9.0	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	23.8	22.5	---

FLUID DEGRADATION		method	limit/base	current	history 1	history 2
Oxidation	Abs/.1mm	*ASTM D7414	>25	18.4	17.4	---
Base Number (BN)	mg KOH/g	ASTM D2896		6.2	5.5	---





OIL ANALYSIS REPORT

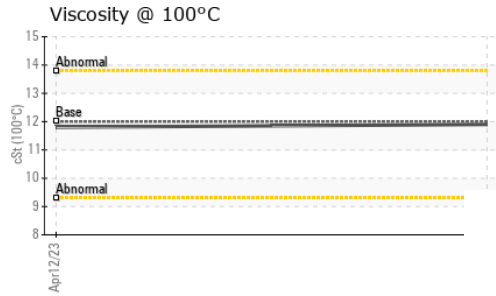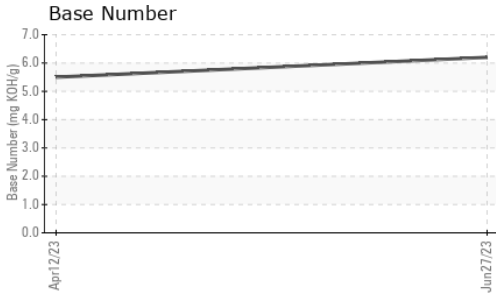

VISUAL	method	limit/base	current	history 1	history 2	
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---
Free Water	scalar	*Visual		NEG	NEG	---

FLUID PROPERTIES	method	limit/base	current	history 1	history 2	
Visc @ 100°C	cSt	ASTM D445	12.00	11.9	11.8	---

GRAPHS

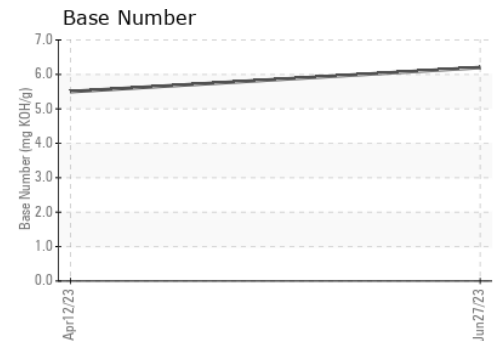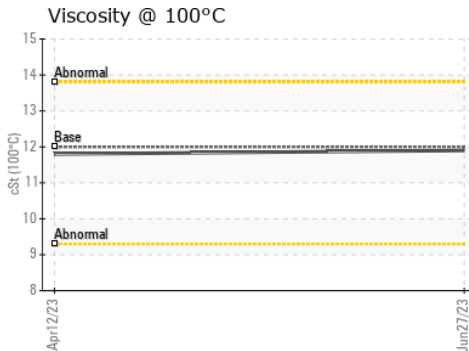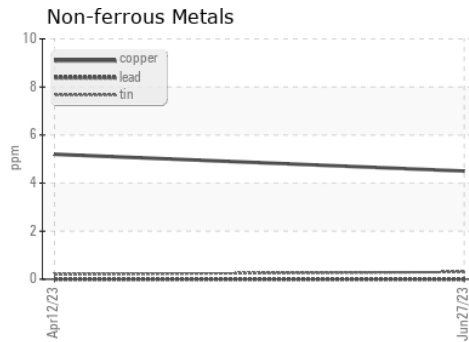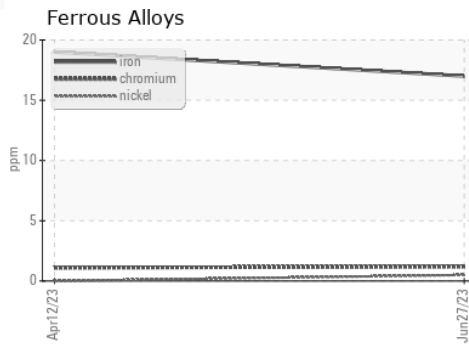

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0093550 **Received** : 05 Jul 2023
Lab Number : **05889857** **Diagnosed** : 06 Jul 2023
Unique Number : 10545667 **Diagnostician** : Don Baldrige
Test Package : FLEET

Transervice - Shop 1376 - Berkeley-Linden
 3425 Tremley Point Road
 Linden, NJ
 US 07036
 Contact: Shop 1376 Oil Analysis
 shop1376@transervice.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: