




# OIL ANALYSIS REPORT

Sample Rating Trend

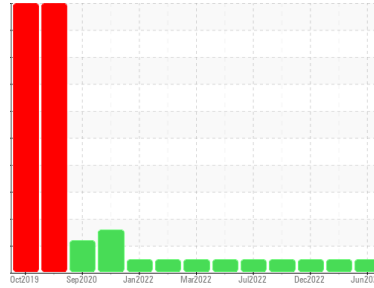

**NORMAL**



Machine Id  
**427089-402445**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

|               | method      | limit/base  | current            | history 1   | history 2   |
|---------------|-------------|-------------|--------------------|-------------|-------------|
| Sample Number | Client Info |             | <b>GFL0083409</b>  | GFL0074154  | GFL0065164  |
| Sample Date   | Client Info |             | <b>28 Jun 2023</b> | 12 Apr 2023 | 19 Dec 2022 |
| Machine Age   | hrs         | Client Info | <b>17613</b>       | 17048       | 307597      |
| Oil Age       | hrs         | Client Info | <b>17613</b>       | 17048       | 0           |
| Oil Changed   | Client Info |             | <b>Changed</b>     | Changed     | Changed     |
| Sample Status |             |             | <b>NORMAL</b>      | NORMAL      | NORMAL      |

## CONTAMINATION

|        | method    | limit/base | current        | history 1 | history 2 |
|--------|-----------|------------|----------------|-----------|-----------|
| Fuel   | WC Method | >3.0       | <b>&lt;1.0</b> | <1.0      | <1.0      |
| Glycol | WC Method |            | <b>NEG</b>     | NEG       | NEG       |

## WEAR METALS

|          | method | limit/base       | current      | history 1 | history 2 |
|----------|--------|------------------|--------------|-----------|-----------|
| Iron     | ppm    | ASTM D5185m >120 | <b>4</b>     | 3         | 5         |
| Chromium | ppm    | ASTM D5185m >20  | <b>&lt;1</b> | <1        | <1        |
| Nickel   | ppm    | ASTM D5185m >5   | <b>0</b>     | 0         | <1        |
| Titanium | ppm    | ASTM D5185m >2   | <b>0</b>     | 0         | 0         |
| Silver   | ppm    | ASTM D5185m >2   | <b>0</b>     | 0         | 0         |
| Aluminum | ppm    | ASTM D5185m >20  | <b>1</b>     | 0         | 2         |
| Lead     | ppm    | ASTM D5185m >40  | <b>0</b>     | <1        | <1        |
| Copper   | ppm    | ASTM D5185m >330 | <b>&lt;1</b> | <1        | <1        |
| Tin      | ppm    | ASTM D5185m >15  | <b>&lt;1</b> | 0         | <1        |
| Vanadium | ppm    | ASTM D5185m      | <b>0</b>     | 0         | 0         |
| Cadmium  | ppm    | ASTM D5185m      | <b>0</b>     | 0         | 0         |

## ADDITIVES

|            | method | limit/base       | current      | history 1 | history 2 |
|------------|--------|------------------|--------------|-----------|-----------|
| Boron      | ppm    | ASTM D5185m 0    | <b>1</b>     | 0         | 0         |
| Barium     | ppm    | ASTM D5185m 0    | <b>0</b>     | 0         | 0         |
| Molybdenum | ppm    | ASTM D5185m 60   | <b>62</b>    | 43        | 58        |
| Manganese  | ppm    | ASTM D5185m 0    | <b>&lt;1</b> | <1        | <1        |
| Magnesium  | ppm    | ASTM D5185m 1010 | <b>1006</b>  | 198       | 922       |
| Calcium    | ppm    | ASTM D5185m 1070 | <b>1155</b>  | 2191      | 1069      |
| Phosphorus | ppm    | ASTM D5185m 1150 | <b>1115</b>  | 1009      | 979       |
| Zinc       | ppm    | ASTM D5185m 1270 | <b>1374</b>  | 1183      | 1217      |
| Sulfur     | ppm    | ASTM D5185m 2060 | <b>4047</b>  | 3038      | 3181      |

## CONTAMINANTS

|           | method | limit/base      | current  | history 1 | history 2 |
|-----------|--------|-----------------|----------|-----------|-----------|
| Silicon   | ppm    | ASTM D5185m >25 | <b>3</b> | 8         | 3         |
| Sodium    | ppm    | ASTM D5185m     | <b>1</b> | 2         | 2         |
| Potassium | ppm    | ASTM D5185m >20 | <b>1</b> | 1         | 2         |

## INFRA-RED



|           | method   | limit/base      | current     | history 1 | history 2 |
|-----------|----------|-----------------|-------------|-----------|-----------|
| Soot %    | %        | *ASTM D7844 >4  | <b>0.2</b>  | 0         | 0.2       |
| Nitration | Abs/cm   | *ASTM D7624 >20 | <b>6.6</b>  | 4.4       | 8.2       |
| Sulfation | Abs/.1mm | *ASTM D7415 >30 | <b>18.9</b> | 12.6      | 19.2      |

## FLUID DEGRADATION

|                  | method   | limit/base      | current     | history 1 | history 2 |
|------------------|----------|-----------------|-------------|-----------|-----------|
| Oxidation        | Abs/.1mm | *ASTM D7414 >25 | <b>15.6</b> | 7.4       | 15.7      |
| Base Number (BN) | mg KOH/g | ASTM D2896 9.8  | <b>8.6</b>  | 7.8       | 8.4       |







# OIL ANALYSIS REPORT

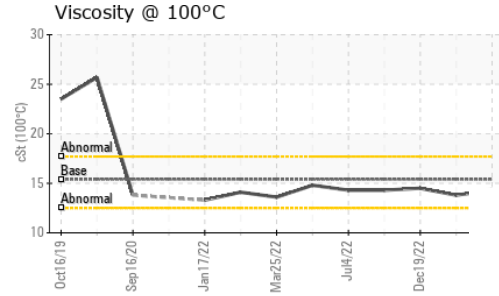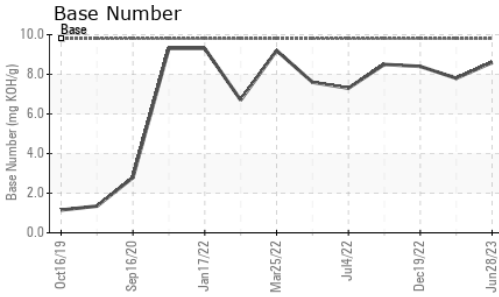

| PARAMETER        | method | limit/base | current | history 1 | history 2 |
|------------------|--------|------------|---------|-----------|-----------|
| White Metal      | scalar | *Visual    | NONE    | NONE      | NONE      |
| Yellow Metal     | scalar | *Visual    | NONE    | NONE      | NONE      |
| Precipitate      | scalar | *Visual    | NONE    | NONE      | NONE      |
| Silt             | scalar | *Visual    | NONE    | NONE      | NONE      |
| Debris           | scalar | *Visual    | NONE    | NONE      | NONE      |
| Sand/Dirt        | scalar | *Visual    | NONE    | NONE      | NONE      |
| Appearance       | scalar | *Visual    | NORML   | NORML     | NORML     |
| Odor             | scalar | *Visual    | NORML   | NORML     | NORML     |
| Emulsified Water | scalar | *Visual    | >0.2    | NEG       | NEG       |
| Free Water       | scalar | *Visual    |         | NEG       | NEG       |

| PARAMETER    | method | limit/base | current | history 1 | history 2 |
|--------------|--------|------------|---------|-----------|-----------|
| Visc @ 100°C | cSt    | ASTM D445  | 15.4    | 14.3      | 13.8      |

## GRAPHS

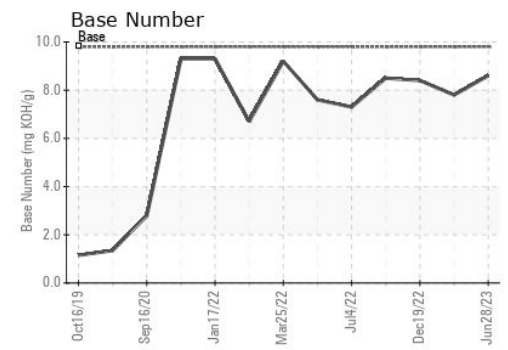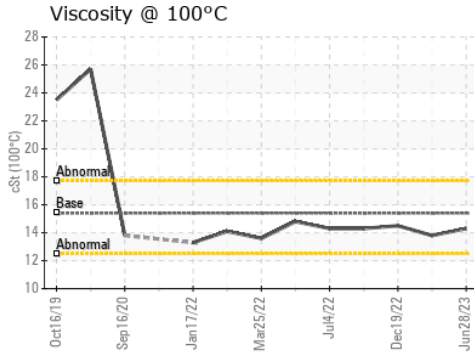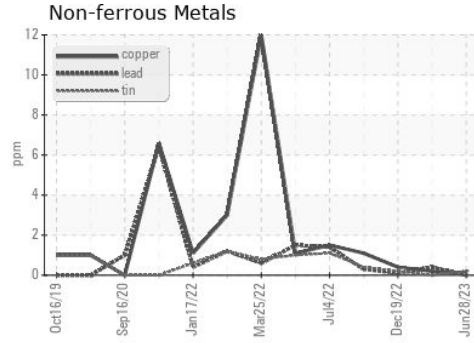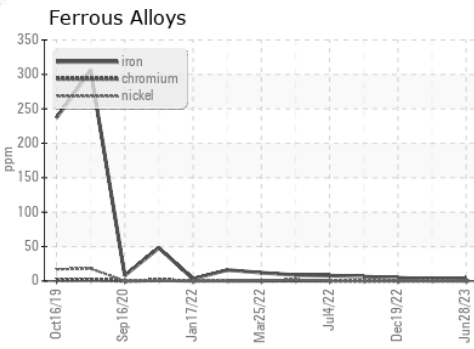

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0083409 **Received** : 05 Jul 2023  
**Lab Number** : 05890000 **Diagnosed** : 05 Jul 2023  
**Unique Number** : 10545810 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 865 - East Mount Hauling**  
 7213 East Mount Houston Road  
 Houston, TX  
 US 77050  
 Contact: Saul Castillo  
 saul.castillo@gflenv.com  
 T:  
 F:

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)