


OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

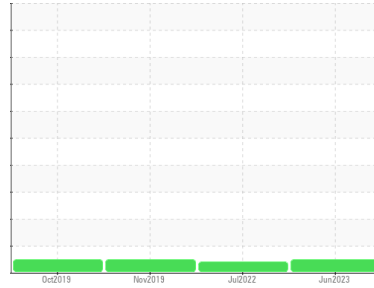

Area
MCGINN BUS COMPANY
Machine Id
11430

Component
Diesel Engine
Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Wear

Metal levels are typical for a new component breaking in.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

| SAMPLE INFORMATION | | method | limit/base | current | history 1 | history 2 |
|--------------------|-------------|-------------|------------|--------------------|-------------|-------------|
| Sample Number | Client Info | | | PCA0090626 | PCA0071947 | PCA0009882 |
| Sample Date | Client Info | | | 07 Jun 2023 | 21 Jul 2022 | 22 Nov 2019 |
| Machine Age | mls | Client Info | | 55656 | 43599 | 38546 |
| Oil Age | mls | Client Info | | 12000 | 12000 | 5962 |
| Oil Changed | Client Info | | | Not Chngd | Changed | Changed |
| Sample Status | | | | NORMAL | ATTENTION | NORMAL |

| CONTAMINATION | | method | limit/base | current | history 1 | history 2 |
|---------------|-----------|--------|------------|----------------|-----------|-----------|
| Fuel | WC Method | >5 | | <1.0 | 0.5 | <1.0 |
| Glycol | WC Method | | | NEG | NEG | NEG |

| WEAR METALS | | method | limit/base | current | history 1 | history 2 |
|-------------|-----|-------------|------------|--------------|-----------|-----------|
| Iron | ppm | ASTM D5185m | >100 | 34 | 35 | 6 |
| Chromium | ppm | ASTM D5185m | >20 | 2 | 2 | <1 |
| Nickel | ppm | ASTM D5185m | >4 | <1 | <1 | <1 |
| Titanium | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Silver | ppm | ASTM D5185m | >3 | <1 | <1 | 0 |
| Aluminum | ppm | ASTM D5185m | >20 | 1 | 2 | 1 |
| Lead | ppm | ASTM D5185m | >40 | 1 | 1 | 0 |
| Copper | ppm | ASTM D5185m | >330 | 5 | 8 | 1 |
| Tin | ppm | ASTM D5185m | >15 | <1 | 1 | 0 |
| Antimony | ppm | ASTM D5185m | | --- | --- | 0 |
| Vanadium | ppm | ASTM D5185m | | 0 | <1 | 0 |
| Cadmium | ppm | ASTM D5185m | | 0 | 0 | 0 |



| ADDITIVES | | method | limit/base | current | history 1 | history 2 |
|------------|-----|-------------|------------|--------------|-----------|-----------|
| Boron | ppm | ASTM D5185m | 0 | 6 | 13 | 19 |
| Barium | ppm | ASTM D5185m | 0 | 0 | 1 | 0 |
| Molybdenum | ppm | ASTM D5185m | 60 | 61 | 55 | 56 |
| Manganese | ppm | ASTM D5185m | 0 | <1 | <1 | <1 |
| Magnesium | ppm | ASTM D5185m | 1010 | 906 | 794 | 844 |
| Calcium | ppm | ASTM D5185m | 1070 | 1182 | 1146 | 1183 |
| Phosphorus | ppm | ASTM D5185m | 1150 | 1024 | 949 | 872 |
| Zinc | ppm | ASTM D5185m | 1270 | 1237 | 1178 | 1162 |
| Sulfur | ppm | ASTM D5185m | 2060 | 2943 | 2909 | 2615 |

| CONTAMINANTS | | method | limit/base | current | history 1 | history 2 |
|--------------|-----|-------------|------------|----------|-----------|-----------|
| Silicon | ppm | ASTM D5185m | >25 | 8 | 14 | 5 |
| Sodium | ppm | ASTM D5185m | | 1 | 3 | 3 |
| Potassium | ppm | ASTM D5185m | >20 | 2 | 2 | 0 |

| INFRA-RED | | method | limit/base | current | history 1 | history 2 |
|-----------|----------|-------------|------------|-------------|-----------|-----------|
| Soot % | % | *ASTM D7844 | >3 | 0.5 | 0.6 | 0.2 |
| Nitration | Abs/cm | *ASTM D7624 | >20 | 9.1 | 10.2 | 6.2 |
| Sulfation | Abs/.1mm | *ASTM D7415 | >30 | 20.2 | 20.8 | 17.7 |

| FLUID DEGRADATION | | method | limit/base | current | history 1 | history 2 |
|-------------------|----------|-------------|------------|--------------|-----------|-----------|
| Oxidation | Abs/.1mm | *ASTM D7414 | >25 | 16.7 | 16.3 | 13.1 |
| Base Number (BN) | mg KOH/g | ASTM D2896 | 9.8 | 11.17 | 7.40 | 8.69 |









OIL ANALYSIS REPORT

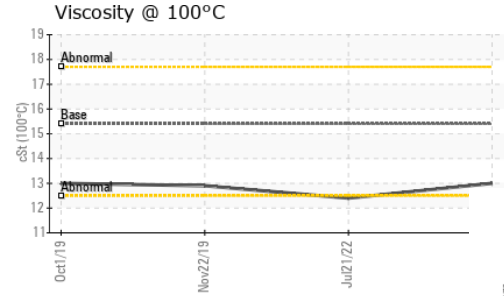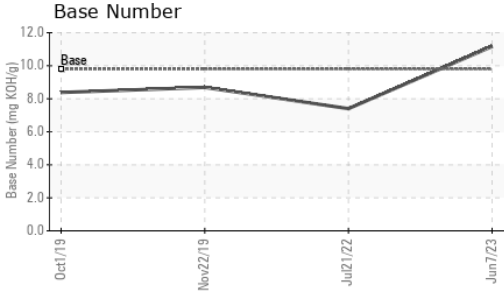

| VISUAL | method | limit/base | current | history 1 | history 2 |
|------------------|--------|------------|---------|-----------|-----------|
| White Metal | scalar | *Visual | NONE | NONE | NONE |
| Yellow Metal | scalar | *Visual | NONE | NONE | NONE |
| Precipitate | scalar | *Visual | NONE | NONE | NONE |
| Silt | scalar | *Visual | NONE | NONE | NONE |
| Debris | scalar | *Visual | NONE | NONE | NONE |
| Sand/Dirt | scalar | *Visual | NONE | NONE | NONE |
| Appearance | scalar | *Visual | NORML | NORML | NORML |
| Odor | scalar | *Visual | NORML | NORML | NORML |
| Emulsified Water | scalar | *Visual | >0.2 | NEG | NEG |
| Free Water | scalar | *Visual | | NEG | NEG |

| FLUID PROPERTIES | | method | limit/base | current | history 1 | history 2 |
|------------------|-----|-----------|------------|-------------|-----------|-----------|
| Visc @ 100°C | cSt | ASTM D445 | 15.4 | 13.0 | ▲ 12.4 | 12.9 |

GRAPHS

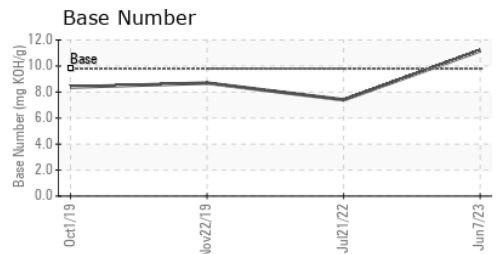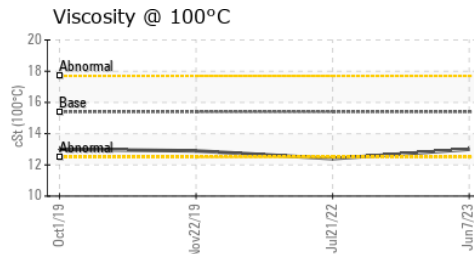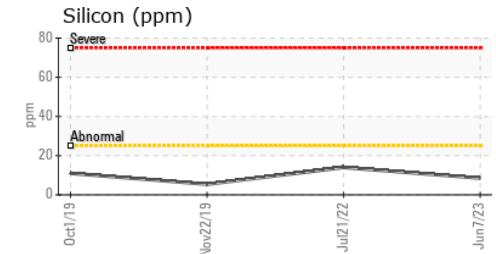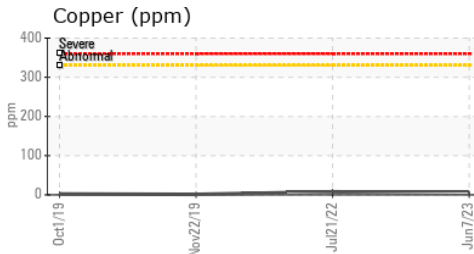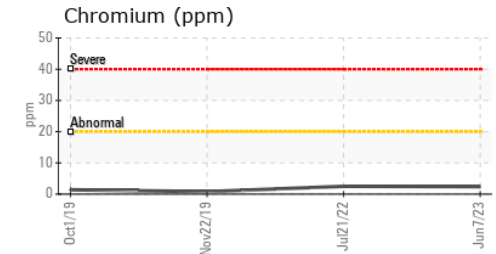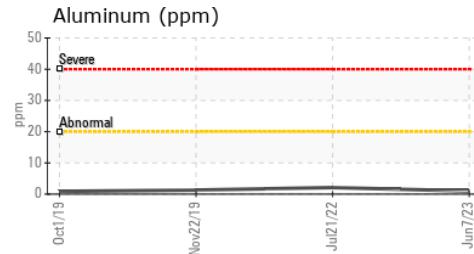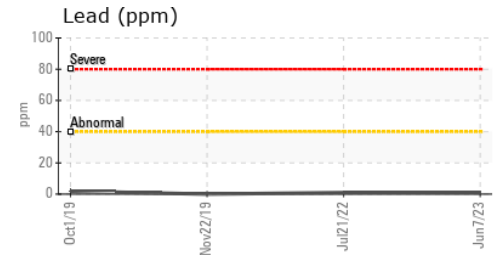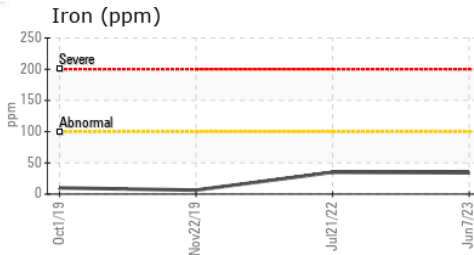

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0090626 **Received** : 05 Jul 2023
Lab Number : **05890404** **Diagnosed** : 06 Jul 2023
Unique Number : 10546214 **Diagnostician** : Wes Davis
Test Package : MOB 2

MGINN BUS CO
 36 ALLEY ST
 LYNN, MA
 US 01902

Contact: TOM SCHULZ
tommcginnbus@aol.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: