


# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

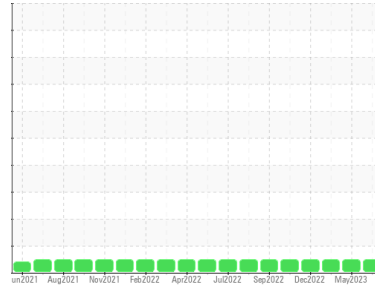

Area  
**Plymouth & Brockton**  
Machine Id  
**11438**

Component  
**Diesel Engine**  
Fluid

**PETRO CANADA DURON SHP 15W40 (36 QTS)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history 1	history 2
Sample Number	Client Info		<b>PCA0090669</b>	PCA0090609	PCA0083294
Sample Date	Client Info		<b>07 Jun 2023</b>	18 May 2023	18 Feb 2023
Machine Age	mls	Client Info	<b>236506</b>	230537	203153
Oil Age	mls	Client Info	<b>24000</b>	24000	24000
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history 1	history 2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history 1	history 2
Iron	ppm	ASTM D5185m >165	<b>8</b>	16	21
Chromium	ppm	ASTM D5185m >5	<b>&lt;1</b>	1	1
Nickel	ppm	ASTM D5185m >4	<b>&lt;1</b>	<1	<1
Titanium	ppm	ASTM D5185m >2	<b>&lt;1</b>	<1	<1
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >20	<b>&lt;1</b>	0	3
Lead	ppm	ASTM D5185m >150	<b>0</b>	0	<1
Copper	ppm	ASTM D5185m >90	<b>&lt;1</b>	<1	<1
Tin	ppm	ASTM D5185m >5	<b>&lt;1</b>	0	<1
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history 1	history 2
Boron	ppm	ASTM D5185m 0	<b>18</b>	6	9
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 60	<b>61</b>	62	62
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m 1010	<b>856</b>	926	989
Calcium	ppm	ASTM D5185m 1070	<b>1109</b>	1089	1095
Phosphorus	ppm	ASTM D5185m 1150	<b>975</b>	993	972
Zinc	ppm	ASTM D5185m 1270	<b>1161</b>	1237	1276
Sulfur	ppm	ASTM D5185m 2060	<b>3037</b>	3125	3607

## CONTAMINANTS

	method	limit/base	current	history 1	history 2
Silicon	ppm	ASTM D5185m >35	<b>3</b>	3	4
Sodium	ppm	ASTM D5185m	<b>2</b>	1	2
Potassium	ppm	ASTM D5185m >20	<b>1</b>	<1	<1



## INFRA-RED

	method	limit/base	current	history 1	history 2
Soot %	%	*ASTM D7844 >7.5	<b>0.7</b>	1.8	2
Nitration	Abs/cm	*ASTM D7624 >20	<b>6.9</b>	9.4	9.6
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>19.4</b>	22.0	22.3

## FLUID DEGRADATION

	method	limit/base	current	history 1	history 2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>15.1</b>	15.4	15.5
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>10.27</b>	8.81	9.44









# OIL ANALYSIS REPORT

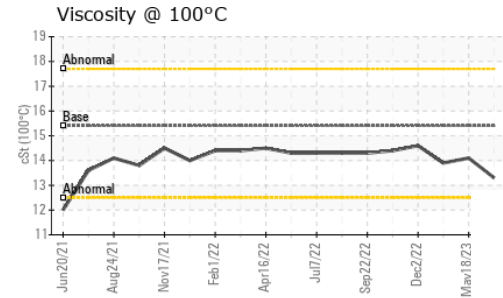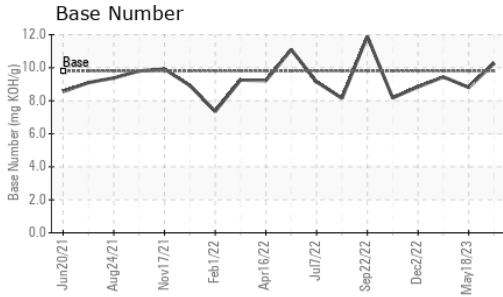

VISUAL	method	limit/base	current	history 1	history 2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history 1	history 2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.3</b>	14.1	13.9

## GRAPHS

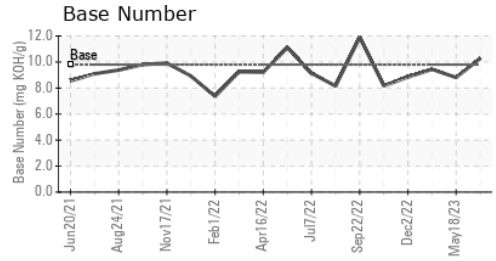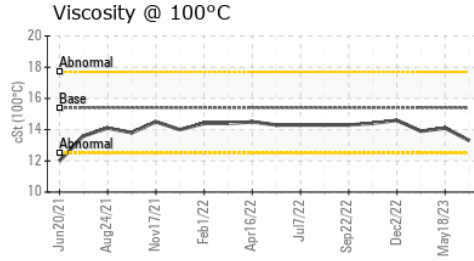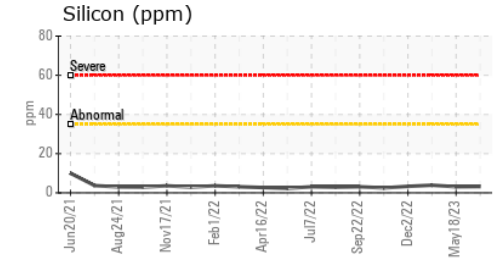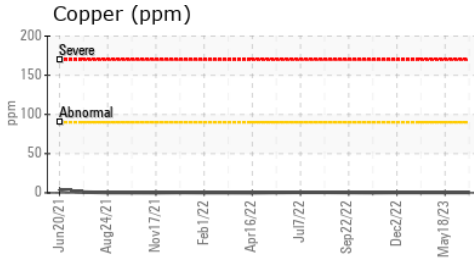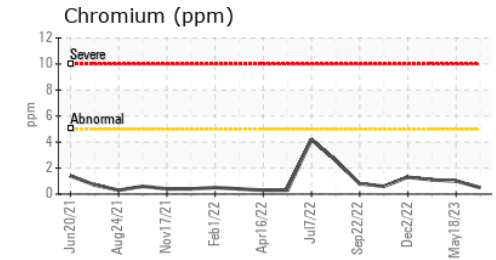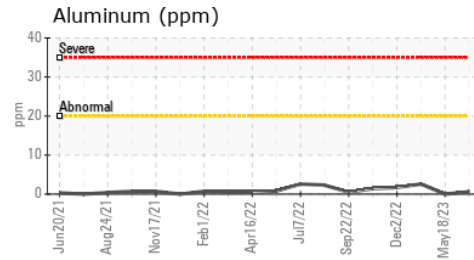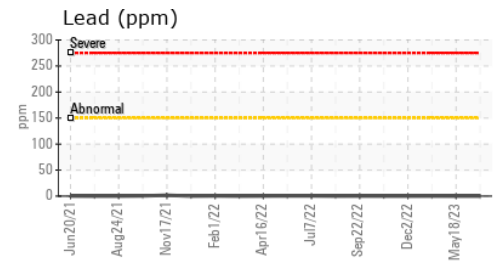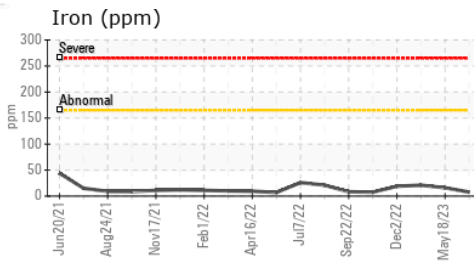

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0090669 **Received** : 05 Jul 2023  
**Lab Number** : 05890407 **Diagnosed** : 06 Jul 2023  
**Unique Number** : 10546217 **Diagnostician** : Wes Davis  
**Test Package** : MOB 2

**PLYMOUTH & BROCKTON**  
 8 INDUSTRIAL PARK RD  
 PLYMOUTH, MA  
 US 02360  
 Contact: Donald Pelquin  
 Dpelquin@P-B.com  
 T: (508)732-6039  
 F: (508)732-6091

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)