OIL ANALYSIS REPORT

Sample Rating Trend

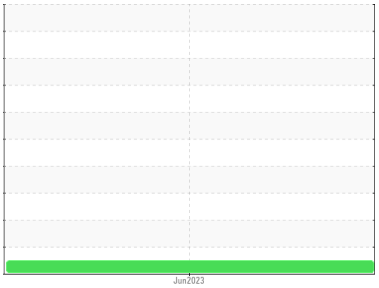

NORMAL

Machine Id
729088
Component
Transmission (Auto)
Fluid
PETRO CANADA DuraDrive HD Synthetic 668 (--- GAL)

DIAGNOSIS

Recommendation
Resample at the next service interval to monitor.

Wear
All component wear rates are normal.

Contamination
There is no indication of any contamination in the oil.

Fluid Condition
The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history 1	history 2
Sample Number		Client Info		**GFL0085366**	---	---
Sample Date		Client Info		**28 Jun 2023**	---	---
Machine Age	hrs	Client Info		**25533**	---	---
Oil Age	hrs	Client Info		**0**	---	---
Oil Changed		Client Info		**Changed**	---	---
Sample Status				**NORMAL**	---	---

WEAR METALS		method	limit/base	current	history 1	history 2
Iron	ppm	ASTM D5185m	>220	**32**	---	---
Chromium	ppm	ASTM D5185m	>2	**0**	---	---
Nickel	ppm	ASTM D5185m	>5	**0**	---	---
Titanium	ppm	ASTM D5185m		**0**	---	---
Silver	ppm	ASTM D5185m	>5	**0**	---	---
Aluminum	ppm	ASTM D5185m	>75	**10**	---	---
Lead	ppm	ASTM D5185m	>95	**2**	---	---
Copper	ppm	ASTM D5185m	>60	**5**	---	---
Tin	ppm	ASTM D5185m	>10	**<1**	---	---
Vanadium	ppm	ASTM D5185m		**0**	---	---
Cadmium	ppm	ASTM D5185m		**0**	---	---

ADDITIVES		method	limit/base	current	history 1	history 2
Boron	ppm	ASTM D5185m		**93**	---	---
Barium	ppm	ASTM D5185m		**2**	---	---
Molybdenum	ppm	ASTM D5185m		**<1**	---	---
Manganese	ppm	ASTM D5185m		**<1**	---	---
Magnesium	ppm	ASTM D5185m		**2**	---	---
Calcium	ppm	ASTM D5185m		**138**	---	---
Phosphorus	ppm	ASTM D5185m		**244**	---	---
Zinc	ppm	ASTM D5185m		**16**	---	---
Sulfur	ppm	ASTM D5185m		**2111**	---	---

CONTAMINANTS		method	limit/base	current	history 1	history 2
Silicon	ppm	ASTM D5185m	>25	**5**	---	---
Sodium	ppm	ASTM D5185m		**1**	---	---
Potassium	ppm	ASTM D5185m	>20	**<1**	---	---

VISUAL		method	limit/base	current	history 1	history 2
White Metal	scalar	*Visual	NONE	**NONE**	---	---
Yellow Metal	scalar	*Visual	NONE	**NONE**	---	---
Precipitate	scalar	*Visual	NONE	**NONE**	---	---
Silt	scalar	*Visual	NONE	**NONE**	---	---
Debris	scalar	*Visual	NONE	**NONE**	---	---
Sand/Dirt	scalar	*Visual	NONE	**NONE**	---	---
Appearance	scalar	*Visual	NORML	**NORML**	---	---
Odor	scalar	*Visual	NORML	**NORML**	---	---
Emulsified Water	scalar	*Visual	>0.1	**NEG**	---	---
Free Water	scalar	*Visual		**NEG**	---	---

FLUID PROPERTIES		method	limit/base	current	history 1	history 2
Visc @ 40°C	cSt	ASTM D445	34	**34.3**	---	---

OIL ANALYSIS REPORT

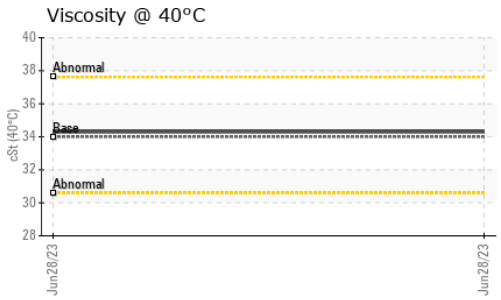

SAMPLE IMAGES	method	limit/base	current	history 1	history 2
Color			no image	no image	no image
Bottom			no image	no image	no image

GRAPHS

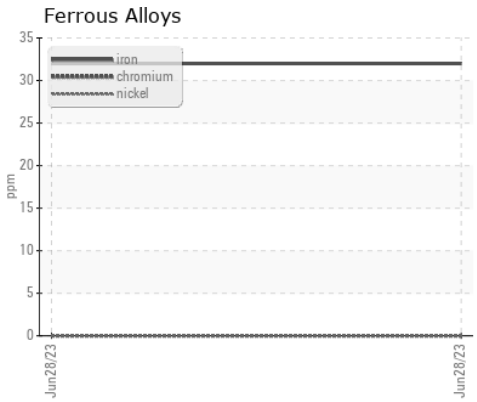

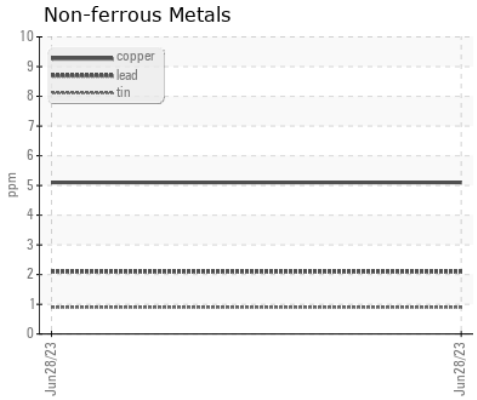

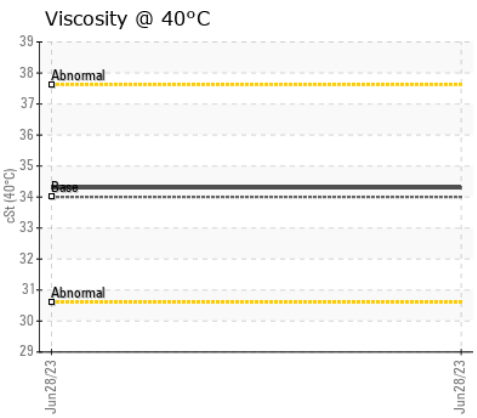

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0085366
Lab Number : 05890980
Unique Number : 10546790
Test Package : FLEET

Received : 05 Jul 2023
Diagnosed : 07 Jul 2023
Diagnostician : Don Baldridge

To discuss this sample report, contact Customer Service at 1-800-237-1369.
** - Denotes test methods that are outside of the ISO 17025 scope of accreditation.*
Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

GFL Environmental - 958A - Chillicothe Wigand
19908 N. State Rd 29
Chillicothe, IL
US 61523
Contact: Stephanie Blount
sblount@gflenv.com
T:
F: