




OIL ANALYSIS REPORT

Sample Rating Trend

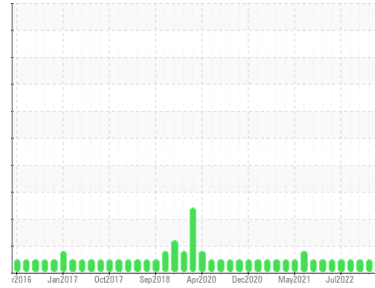

NORMAL



Machine Id
10580

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 15W40 (34 QTS)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history 1	history 2
Sample Number	Client Info	GFL0076970	GFL0064953	GFL0064923
Sample Date	Client Info	30 Jun 2023	01 Mar 2023	23 Dec 2022
Machine Age	hrs	14674	14674	0
Oil Age	hrs	600	600	600
Oil Changed	Client Info	Not Chngd	Not Chngd	Not Chngd
Sample Status		NORMAL	NORMAL	NORMAL

CONTAMINATION

method	limit/base	current	history 1	history 2
Fuel	WC Method >3.0	<1.0	<1.0	<1.0
Glycol	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history 1	history 2
Iron	ppm ASTM D5185m >75	23	13	21
Chromium	ppm ASTM D5185m >5	1	<1	1
Nickel	ppm ASTM D5185m >4	<1	0	2
Titanium	ppm ASTM D5185m >2	0	0	0
Silver	ppm ASTM D5185m >2	0	0	0
Aluminum	ppm ASTM D5185m >15	1	2	1
Lead	ppm ASTM D5185m >25	<1	0	0
Copper	ppm ASTM D5185m >100	2	1	1
Tin	ppm ASTM D5185m >4	<1	0	<1
Vanadium	ppm ASTM D5185m	0	0	0
Cadmium	ppm ASTM D5185m	0	0	0

ADDITIVES

method	limit/base	current	history 1	history 2
Boron	ppm ASTM D5185m 0	7	6	3
Barium	ppm ASTM D5185m 0	0	0	0
Molybdenum	ppm ASTM D5185m 60	66	61	64
Manganese	ppm ASTM D5185m 0	<1	<1	<1
Magnesium	ppm ASTM D5185m 1010	1008	932	1002
Calcium	ppm ASTM D5185m 1070	1142	1123	1131
Phosphorus	ppm ASTM D5185m 1150	1072	1015	1053
Zinc	ppm ASTM D5185m 1270	1349	1259	1319
Sulfur	ppm ASTM D5185m 2060	3654	3494	3626

CONTAMINANTS

method	limit/base	current	history 1	history 2
Silicon	ppm ASTM D5185m >25	7	5	8
Sodium	ppm ASTM D5185m	50	5	6
Potassium	ppm ASTM D5185m >20	14	0	1

INFRA-RED



method	limit/base	current	history 1	history 2
Soot %	% *ASTM D7844 >6	0.5	0.4	0.7
Nitration	Abs/cm *ASTM D7624 >20	12.3	10.4	11.7
Sulfation	Abs/.1mm *ASTM D7415 >30	24.1	21.5	23.7

FLUID DEGRADATION

method	limit/base	current	history 1	history 2
Oxidation	Abs/.1mm *ASTM D7414 >25	23.2	20.3	21.2
Base Number (BN)	mg KOH/g ASTM D2896 9.8	7.3	7.2	8.0







OIL ANALYSIS REPORT

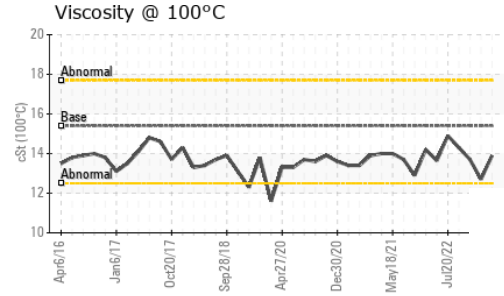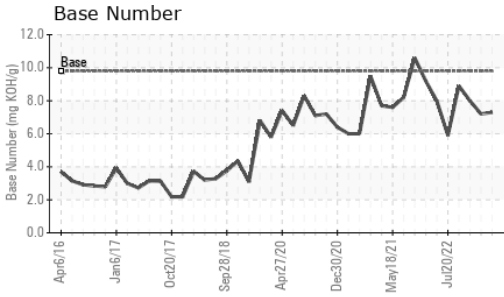

VISUAL	method	limit/base	current	history 1	history 2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history 1	history 2	
Visc @ 100°C	cSt	ASTM D445	15.4	13.9	12.7	13.7

GRAPHS

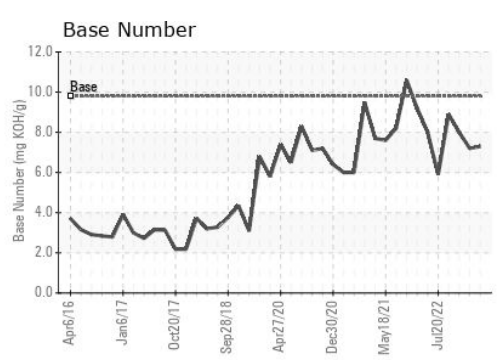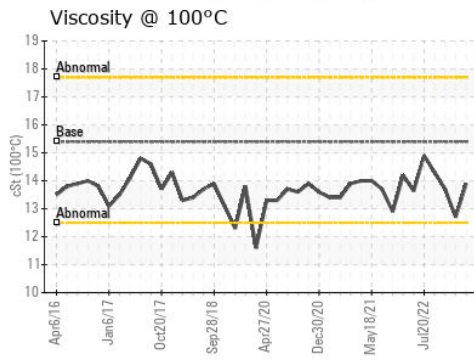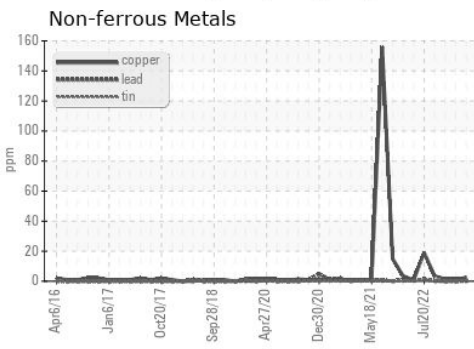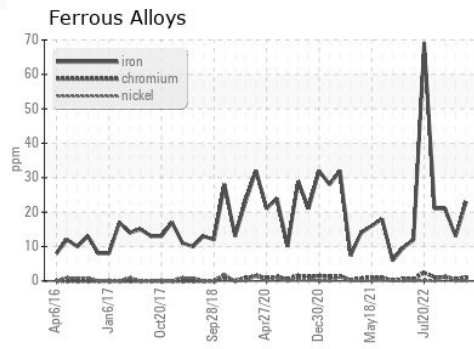

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0076970 **Received** : 06 Jul 2023
Lab Number : **05891122** **Diagnosed** : 06 Jul 2023
Unique Number : 10546932 **Diagnostician** : Wes Davis
Test Package : FLEET

GFL Environmental - 020 - Alamance
 703 East Gilbreath St
 Graham, NC
 US 27253
 Contact:
 richard.belcher@gflenv.com
 T: (800)207-6618
 F: (336)229-0526

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)