



# PROBLEM SUMMARY

Sample Rating Trend

DIRT




Area  
**{UNASSIGNED}**  
 Machine Id  
**Mack TE64 Front End**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (12 GAL)**




## COMPONENT CONDITION SUMMARY

### ▲ Viscosity @ 100°C

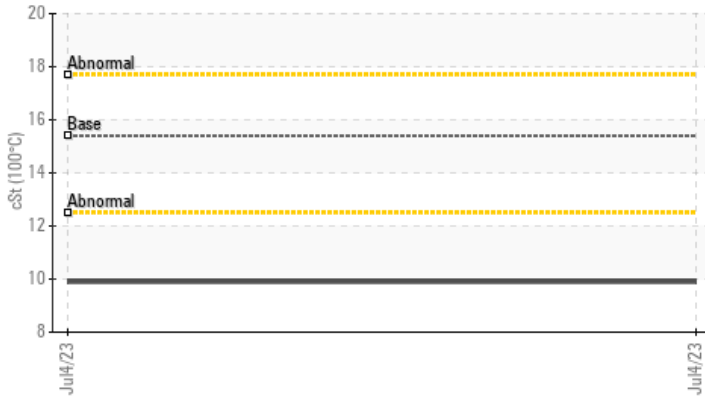

### ▲ Silicon (ppm)

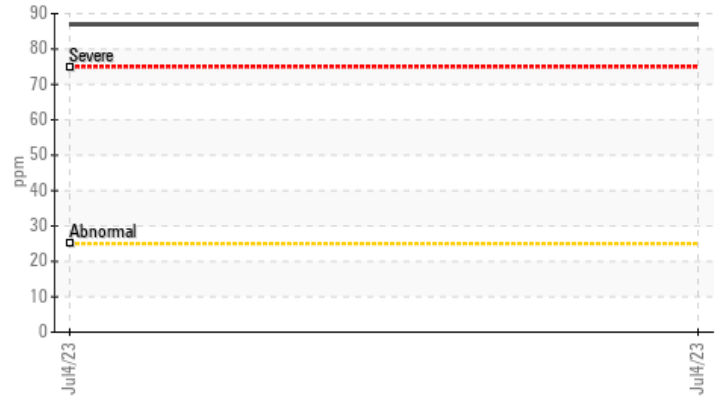

## RECOMMENDATION

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

## PROBLEMATIC TEST RESULTS

Sample Status				ABNORMAL	---	---
Silicon	ppm	ASTM D5185m	>25	▲ 87	---	---
Visc @ 100°C	cSt	ASTM D445	15.4	▲ 9.9	---	---

Customer Id: GFL018  
 Sample No.: GFL0066841  
 Lab Number: 05891139  
 Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data:  
 Angela Borella +1 800-237-1369  
[angela.borella@wearcheckusa.com](mailto:angela.borella@wearcheckusa.com)

To change component or sample information:  
 Customer Service +1 1-800-237-1369  
[customerservice@wearcheck.com](mailto:customerservice@wearcheck.com)

## RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Fluid	---	---	?	Oil and filter change at the time of sampling has been noted.
Change Filter	---	---	?	Oil and filter change at the time of sampling has been noted.


## HISTORICAL DIAGNOSIS



# OIL ANALYSIS REPORT

Area  
**{UNASSIGNED}**  
 Machine Id  
**Mack TE64 Front End**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (12 GAL)**

## Sample Rating Trend

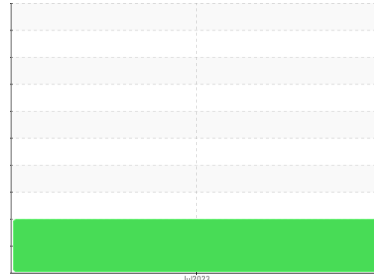

**DIRT**



## DIAGNOSIS

### ▲ Recommendation

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### ▲ Contamination

Elemental level of silicon (Si) above normal. Tests indicate that there is no fuel present in the oil.

### ▲ Fluid Condition

The oil viscosity is lower than normal. Confirm oil type.

## SAMPLE INFORMATION

method	limit/base	current	history 1	history 2
Sample Number	Client Info	<b>GFL0066841</b>	---	---
Sample Date	Client Info	<b>04 Jul 2023</b>	---	---
Machine Age	hrs	<b>0</b>	---	---
Oil Age	hrs	<b>0</b>	---	---
Oil Changed	Client Info	<b>Changed</b>	---	---
Sample Status		<b>ABNORMAL</b>	---	---

## CONTAMINATION

method	limit/base	current	history 1	history 2
Glycol	WC Method	<b>NEG</b>	---	---

## WEAR METALS

method	limit/base	current	history 1	history 2	
Iron	ppm	ASTM D5185m >120	<b>54</b>	---	---
Chromium	ppm	ASTM D5185m >20	<b>1</b>	---	---
Nickel	ppm	ASTM D5185m >5	<b>6</b>	---	---
Titanium	ppm	ASTM D5185m >2	<b>&lt;1</b>	---	---
Silver	ppm	ASTM D5185m >2	<b>2</b>	---	---
Aluminum	ppm	ASTM D5185m >20	<b>5</b>	---	---
Lead	ppm	ASTM D5185m >40	<b>&lt;1</b>	---	---
Copper	ppm	ASTM D5185m >330	<b>77</b>	---	---
Tin	ppm	ASTM D5185m >15	<b>4</b>	---	---
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	---	---
Cadmium	ppm	ASTM D5185m	<b>0</b>	---	---

## ADDITIVES

method	limit/base	current	history 1	history 2	
Boron	ppm	ASTM D5185m 0	<b>254</b>	---	---
Barium	ppm	ASTM D5185m 0	<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185m 60	<b>122</b>	---	---
Manganese	ppm	ASTM D5185m 0	<b>6</b>	---	---
Magnesium	ppm	ASTM D5185m 1010	<b>736</b>	---	---
Calcium	ppm	ASTM D5185m 1070	<b>1552</b>	---	---
Phosphorus	ppm	ASTM D5185m 1150	<b>753</b>	---	---
Zinc	ppm	ASTM D5185m 1270	<b>918</b>	---	---
Sulfur	ppm	ASTM D5185m 2060	<b>2937</b>	---	---

## CONTAMINANTS

method	limit/base	current	history 1	history 2	
Silicon	ppm	ASTM D5185m >25	<b>▲ 87</b>	---	---
Sodium	ppm	ASTM D5185m	<b>4</b>	---	---
Potassium	ppm	ASTM D5185m >20	<b>17</b>	---	---
Fuel	%	ASTM D3524 >3.0	<b>0.3</b>	---	---

## INFRA-RED





method	limit/base	current	history 1	history 2	
Soot %	%	*ASTM D7844 >4	<b>0.4</b>	---	---
Nitration	Abs/cm	*ASTM D7624 >20	<b>10.0</b>	---	---
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>25.8</b>	---	---

## FLUID DEGRADATION

method	limit/base	current	history 1	history 2	
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>23.1</b>	---	---
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>8.9</b>	---	---







# OIL ANALYSIS REPORT

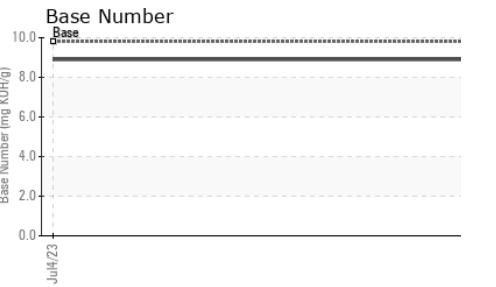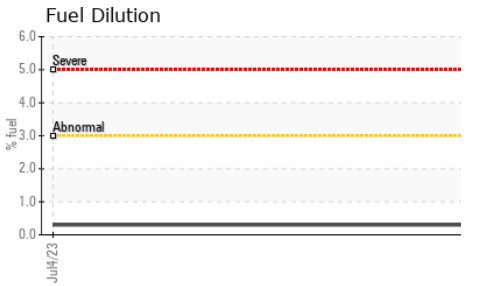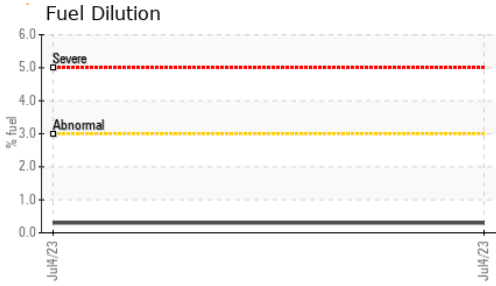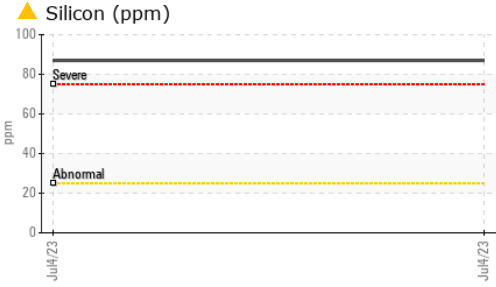

VISUAL	method	limit/base	current	history 1	history 2	
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---
Precipitate	scalar	*Visual	NONE	NONE	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---
Free Water	scalar	*Visual		NEG	---	---

FLUID PROPERTIES	method	limit/base	current	history 1	history 2	
Visc @ 100°C	cSt	ASTM D445	15.4	▲ 9.9	---	---

## GRAPHS

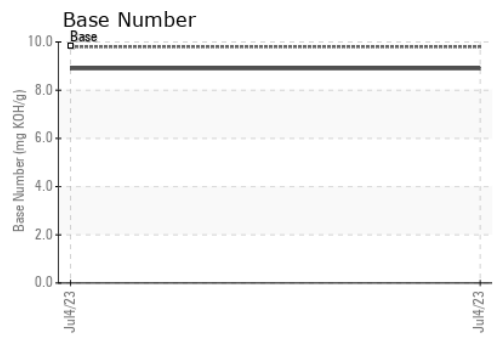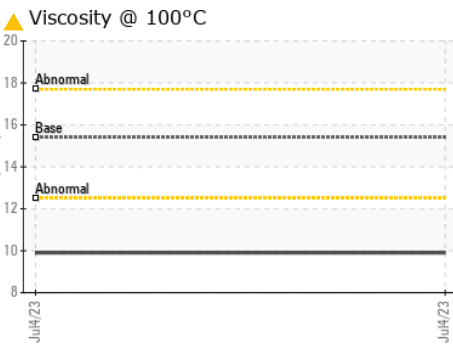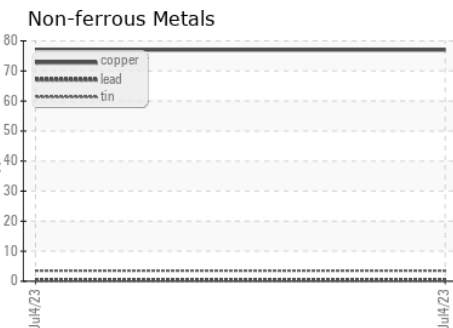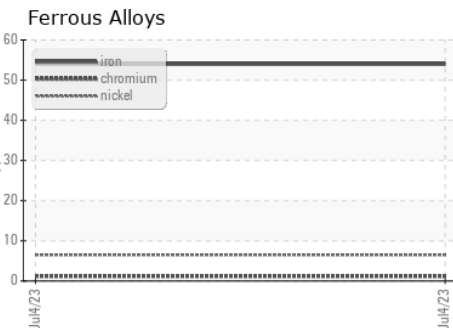

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0066841 **Received** : 06 Jul 2023  
**Lab Number** : 05891139 **Diagnosed** : 07 Jul 2023  
**Unique Number** : 10546949 **Diagnostician** : Angela Borella  
**Test Package** : FLEET ( Additional Tests: FuelDilution, PercentFuel )

**GFL Environmental - 018 - Fayetteville**  
 4621 Marracco Drive  
 Hope Mills, NC  
 US 28348  
 Contact: Robert Carter  
 robert.carter@gflenv.com  
 T: (910)596-1170  
 F:

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)