


# OIL ANALYSIS REPORT

Sample Rating Trend



FUEL

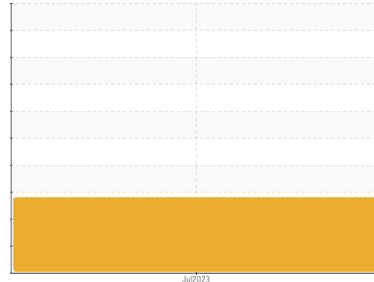

Machine Id  
**MACK 202**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

We advise that you check the fuel injection system. We recommend that you drain the oil from the component if this has not already been done. We recommend an early resample to monitor this condition.

### Wear

Metal levels are typical for a components first oil change.

### Contamination

There is a high amount of fuel present in the oil. Tests confirm the presence of fuel in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.

## SAMPLE INFORMATION

	method	limit/base	current	history 1	history 2
Sample Number	Client Info		<b>PCA0090816</b>	---	---
Sample Date	Client Info		<b>03 Jul 2023</b>	---	---
Machine Age	mls	Client Info	<b>357000</b>	---	---
Oil Age	mls	Client Info	<b>357000</b>	---	---
Oil Changed	Client Info		<b>N/A</b>	---	---
Sample Status			<b>SEVERE</b>	---	---

## CONTAMINATION

	method	limit/base	current	history 1	history 2
Glycol	WC Method		<b>NEG</b>	---	---

## WEAR METALS

	method	limit/base	current	history 1	history 2
Iron	ppm	ASTM D5185m >120	<b>14</b>	---	---
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	---	---
Nickel	ppm	ASTM D5185m >5	<b>0</b>	---	---
Titanium	ppm	ASTM D5185m >2	<b>&lt;1</b>	---	---
Silver	ppm	ASTM D5185m >2	<b>0</b>	---	---
Aluminum	ppm	ASTM D5185m >20	<b>&lt;1</b>	---	---
Lead	ppm	ASTM D5185m >40	<b>&lt;1</b>	---	---
Copper	ppm	ASTM D5185m >330	<b>3</b>	---	---
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	---	---
Vanadium	ppm	ASTM D5185m	<b>0</b>	---	---
Cadmium	ppm	ASTM D5185m	<b>0</b>	---	---

## ADDITIVES

	method	limit/base	current	history 1	history 2
Boron	ppm	ASTM D5185m 0	<b>2</b>	---	---
Barium	ppm	ASTM D5185m 0	<b>2</b>	---	---
Molybdenum	ppm	ASTM D5185m 60	<b>50</b>	---	---
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	---	---
Magnesium	ppm	ASTM D5185m 1010	<b>721</b>	---	---
Calcium	ppm	ASTM D5185m 1070	<b>860</b>	---	---
Phosphorus	ppm	ASTM D5185m 1150	<b>820</b>	---	---
Zinc	ppm	ASTM D5185m 1270	<b>986</b>	---	---
Sulfur	ppm	ASTM D5185m 2060	<b>2627</b>	---	---

## CONTAMINANTS

	method	limit/base	current	history 1	history 2
Silicon	ppm	ASTM D5185m >25	<b>4</b>	---	---
Sodium	ppm	ASTM D5185m	<b>0</b>	---	---
Potassium	ppm	ASTM D5185m >20	<b>2</b>	---	---
Fuel	%	ASTM D3524 >3.0	<b>22.8</b>	---	---




## INFRA-RED

	method	limit/base	current	history 1	history 2
Soot %	%	*ASTM D7844 >4	<b>0.4</b>	---	---
Nitration	Abs/cm	*ASTM D7624 >20	<b>7.9</b>	---	---
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>21.3</b>	---	---

## FLUID DEGRADATION

	method	limit/base	current	history 1	history 2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>19.8</b>	---	---
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>8.30</b>	---	---









# OIL ANALYSIS REPORT

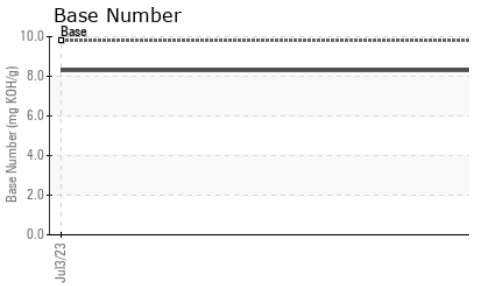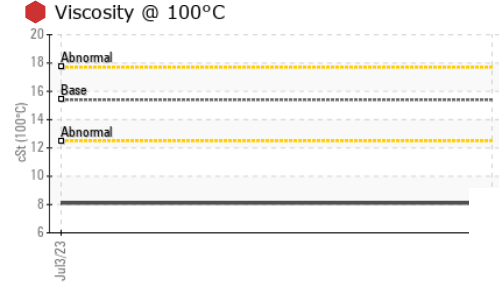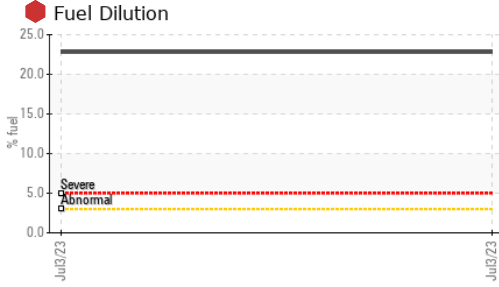

VISUAL	method	limit/base	current	history 1	history 2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history 1	history 2
Visc @ 100°C	cSt	ASTM D445	15.4	8.1	---

## GRAPHS

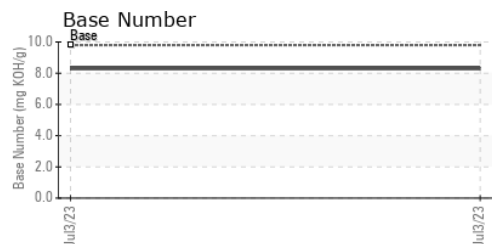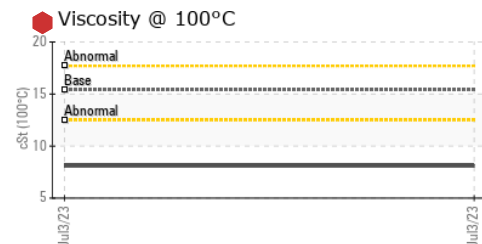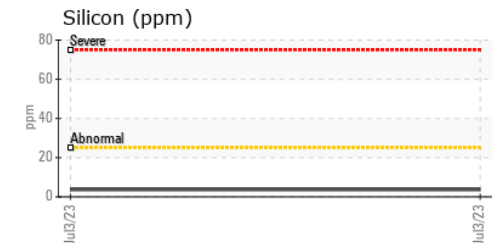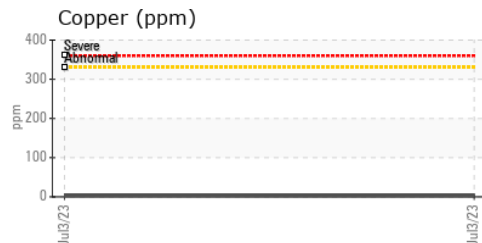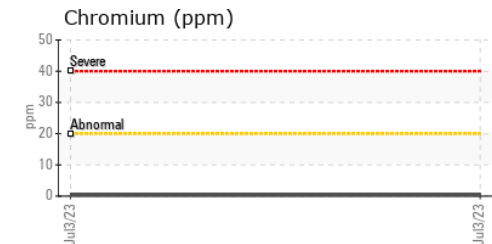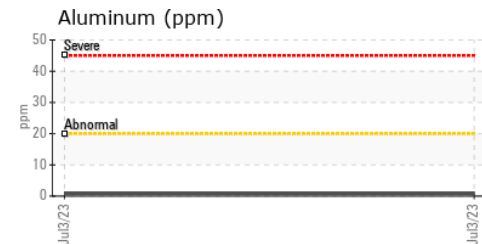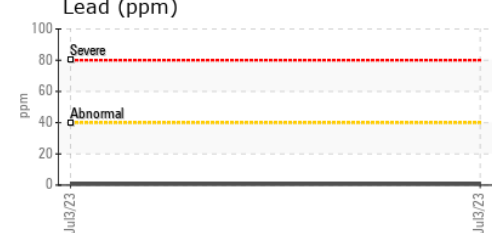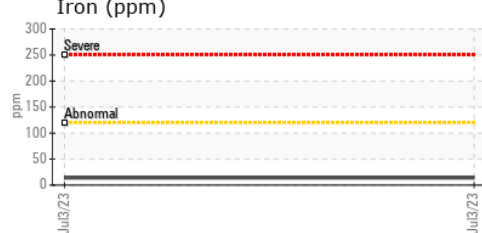

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0090816 **Received** : 06 Jul 2023  
**Lab Number** : 05891487 **Diagnosed** : 10 Jul 2023  
**Unique Number** : 10547297 **Diagnostician** : Wes Davis  
**Test Package** : MOB 2 ( Additional Tests: FuelDilution, PercentFuel )

**K.R. REZENDES INC**  
 3 SAMMYS LANE  
 ASSONET, MA  
 US 02702  
 Contact: JAKE OLIVEIRA  
 kshop1956@gmail.com  
 T: (774)305-3318  
 F:

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)