


# OIL ANALYSIS REPORT

## Sample Rating Trend



**NORMAL**

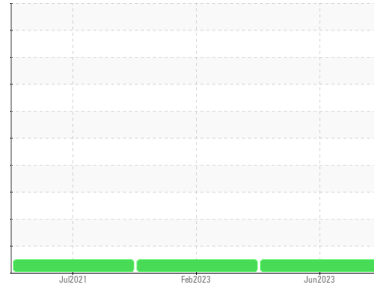

Machine Id  
**409379**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 10W30 (--- QTS)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

### SAMPLE INFORMATION

	method	limit/base	current	history 1	history 2
Sample Number	Client Info		<b>PCA0100765</b>	PCA0090118	PCA0053261
Sample Date	Client Info		<b>24 Jun 2023</b>	16 Feb 2023	10 Jul 2021
Machine Age	mls	Client Info	<b>162511</b>	146700	79098
Oil Age	mls	Client Info	<b>162511</b>	0	12000
Oil Changed	Client Info		<b>Changed</b>	N/A	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

### CONTAMINATION

	method	limit/base	current	history 1	history 2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method		<b>NEG</b>	NEG	NEG

### WEAR METALS

	method	limit/base	current	history 1	history 2
Iron	ppm	ASTM D5185m >100	<b>24</b>	20	26
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m >4	<b>0</b>	<1	<1
Titanium	ppm	ASTM D5185m	<b>6</b>	6	<1
Silver	ppm	ASTM D5185m >3	<b>0</b>	0	<1
Aluminum	ppm	ASTM D5185m >20	<b>2</b>	3	2
Lead	ppm	ASTM D5185m >40	<b>4</b>	4	2
Copper	ppm	ASTM D5185m >330	<b>2</b>	2	112
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	<1	1
Antimony	ppm	ASTM D5185m	<b>---</b>	---	0
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

### ADDITIVES

	method	limit/base	current	history 1	history 2
Boron	ppm	ASTM D5185m 2	<b>4</b>	4	12
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 50	<b>61</b>	56	62
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	<1	1
Magnesium	ppm	ASTM D5185m 950	<b>938</b>	855	829
Calcium	ppm	ASTM D5185m 1050	<b>1294</b>	1227	1348
Phosphorus	ppm	ASTM D5185m 995	<b>1049</b>	940	977
Zinc	ppm	ASTM D5185m 1180	<b>1249</b>	1161	1184
Sulfur	ppm	ASTM D5185m 2600	<b>3501</b>	3212	2384

### CONTAMINANTS

	method	limit/base	current	history 1	history 2
Silicon	ppm	ASTM D5185m >25	<b>3</b>	3	3
Sodium	ppm	ASTM D5185m	<b>14</b>	8	5
Potassium	ppm	ASTM D5185m >20	<b>1</b>	2	6



### INFRA-RED

	method	limit/base	current	history 1	history 2
Soot %	%	*ASTM D7844 >3	<b>1.5</b>	1.2	0.8
Nitration	Abs/cm	*ASTM D7624 >20	<b>13.1</b>	11.5	10.7
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>23.3</b>	21.2	21.8

### FLUID DEGRADATION

	method	limit/base	current	history 1	history 2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>20.3</b>	18.0	16.9
Base Number (BN)	mg KOH/g	ASTM D2896	<b>8.6</b>	7.9	---









# OIL ANALYSIS REPORT

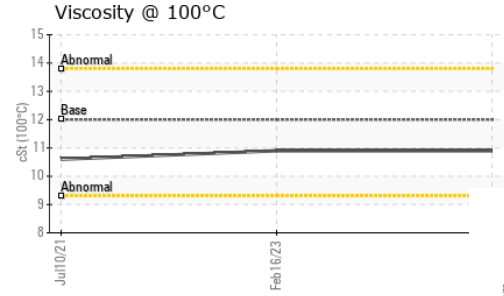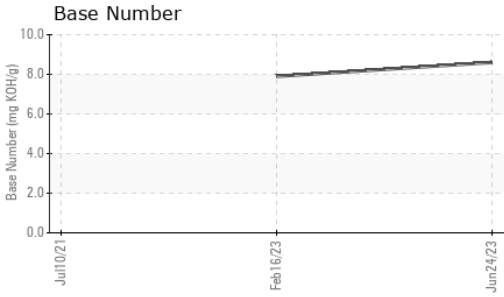

VISUAL	method	limit/base	current	history 1	history 2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history 1	history 2
Visc @ 100°C	cSt	ASTM D445	12.00	10.9	10.6

## GRAPHS

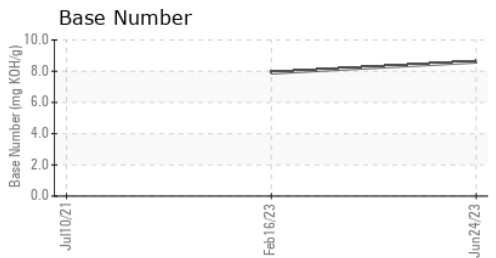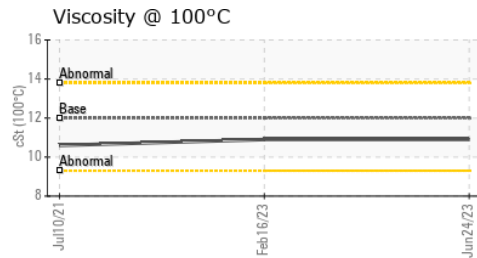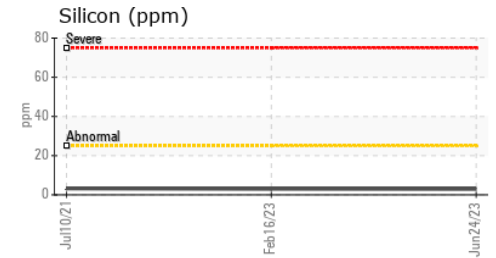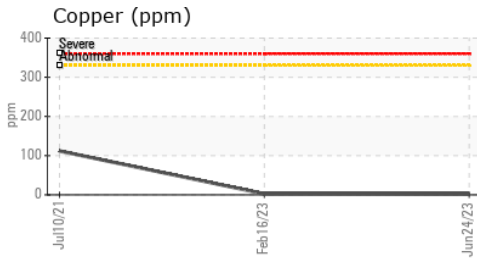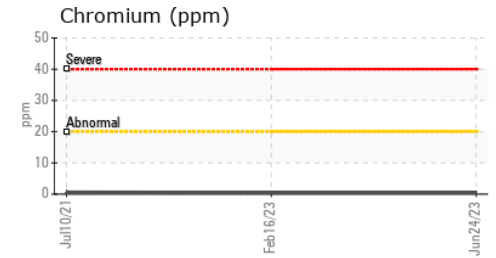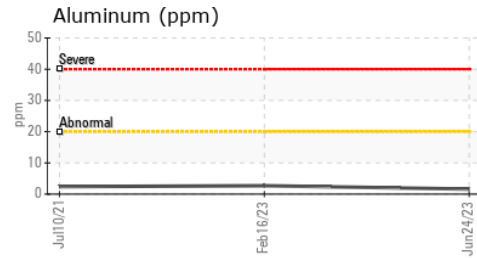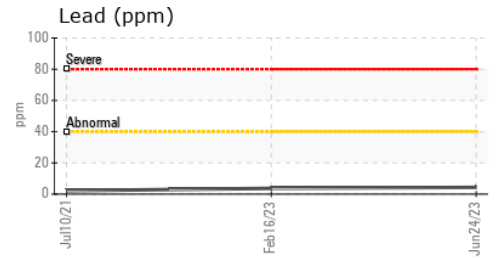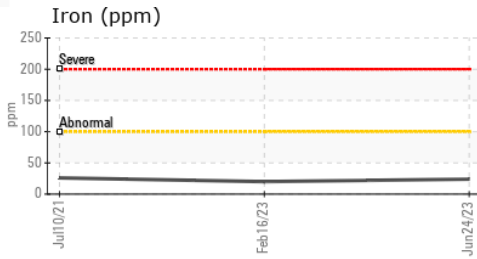

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0100765 **Received** : 07 Jul 2023  
**Lab Number** : 05891952 **Diagnosed** : 07 Jul 2023  
**Unique Number** : 10547762 **Diagnostician** : Wes Davis  
**Test Package** : MOB 1 ( Additional Tests: TBN )

**MILLER TRUCK LEASING #118**  
 2196 BENNETT ROAD  
 PHILADELPHIA, PA  
 US 19116  
 Contact: JOHN KEEN  
 jkeen@millertransgroup.com  
 T: (215)552-9832  
 F: (215)552-9892

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)