


OIL ANALYSIS REPORT

Sample Rating Trend



WEAR

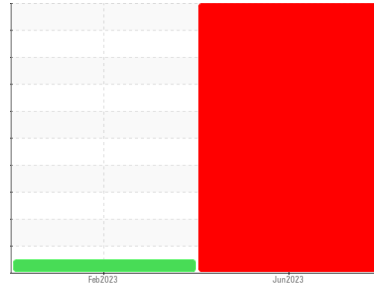

Machine Id
734062

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 10W30 (--- GAL)

DIAGNOSIS

Recommendation

We advise that you check for the source of the coolant leak. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

Wear

Piston, ring and cylinder wear is indicated.

Contamination

Sodium and/or potassium levels are high. Test for glycol is positive.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil.

SAMPLE INFORMATION

	method	limit/base	current	history 1	history 2
Sample Number	Client Info		PCA0100765	PCA0093288	---
Sample Date	Client Info		23 Jun 2023	18 Feb 2023	---
Machine Age	mls	Client Info	77626	0	---
Oil Age	mls	Client Info	77626	0	---
Oil Changed	Client Info		Changed	N/A	---
Sample Status			SEVERE	NORMAL	---

CONTAMINATION

	method	limit/base	current	history 1	history 2
Fuel	WC Method	>5	<1.0	<1.0	---

WEAR METALS

	method	limit/base	current	history 1	history 2
Iron	ppm	ASTM D5185m >100	▲ 103	27	---
Chromium	ppm	ASTM D5185m >20	10	<1	---
Nickel	ppm	ASTM D5185m >4	<1	0	---
Titanium	ppm	ASTM D5185m	<1	3	---
Silver	ppm	ASTM D5185m >3	0	0	---
Aluminum	ppm	ASTM D5185m >20	▲ 109	5	---
Lead	ppm	ASTM D5185m >40	0	<1	---
Copper	ppm	ASTM D5185m >330	175	84	---
Tin	ppm	ASTM D5185m >15	5	<1	---
Vanadium	ppm	ASTM D5185m	0	0	---
Cadmium	ppm	ASTM D5185m	0	0	---

ADDITIVES

	method	limit/base	current	history 1	history 2
Boron	ppm	ASTM D5185m 2	24	9	---
Barium	ppm	ASTM D5185m 0	0	0	---
Molybdenum	ppm	ASTM D5185m 50	46	66	---
Manganese	ppm	ASTM D5185m 0	4	3	---
Magnesium	ppm	ASTM D5185m 950	569	931	---
Calcium	ppm	ASTM D5185m 1050	1785	1353	---
Phosphorus	ppm	ASTM D5185m 995	719	984	---
Zinc	ppm	ASTM D5185m 1180	882	1307	---
Sulfur	ppm	ASTM D5185m 2600	2004	2794	---

CONTAMINANTS

	method	limit/base	current	history 1	history 2
Silicon	ppm	ASTM D5185m >25	11	8	---
Sodium	ppm	ASTM D5185m	12	2	---
Potassium	ppm	ASTM D5185m >20	▲ 246	4	---
Glycol	%	*ASTM D2982	▲ 0.06	NEG	---

INFRA-RED


	method	limit/base	current	history 1	history 2
Soot %	%	*ASTM D7844 >3	1.6	0.1	---
Nitration	Abs/cm	*ASTM D7624 >20	14.3	12.2	---
Sulfation	Abs/.1mm	*ASTM D7415 >30	27.1	22.8	---

FLUID DEGRADATION


	method	limit/base	current	history 1	history 2
Oxidation	Abs/.1mm	*ASTM D7414 >25	30.3	22.9	---
Base Number (BN)	mg KOH/g	ASTM D2896	6.0	6.8	---

OIL ANALYSIS REPORT


▲ Glycol Contamination

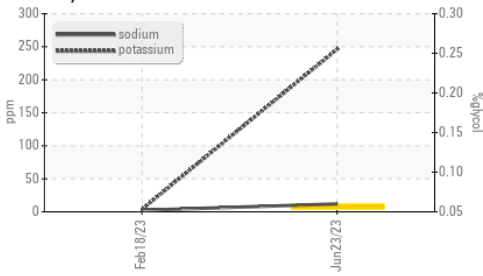


▲ Ferrous Alloys

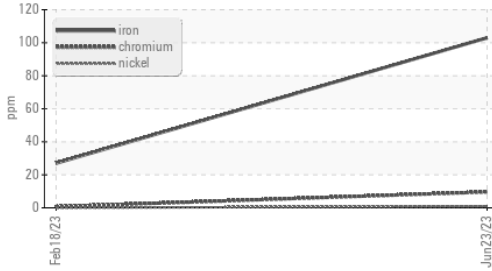


▲ Ferrous Alloys

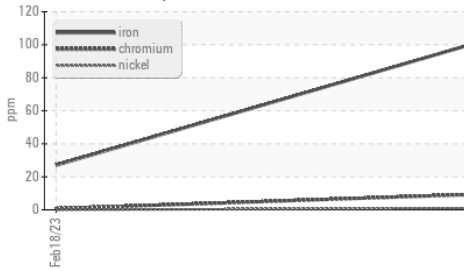

Base Number

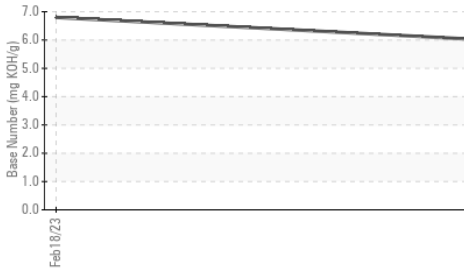

Viscosity @ 100°C

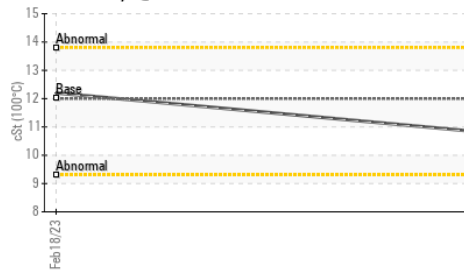


PARAMETER	method	limit/base	current	history 1	history 2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---


PARAMETER	method	limit/base	current	history 1	history 2
Visc @ 100°C	cSt	ASTM D445	12.00	10.8	12.2

GRAPHS


▲ Iron (ppm)

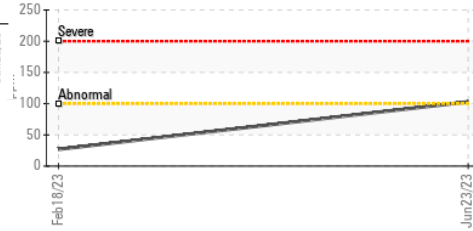


Lead (ppm)

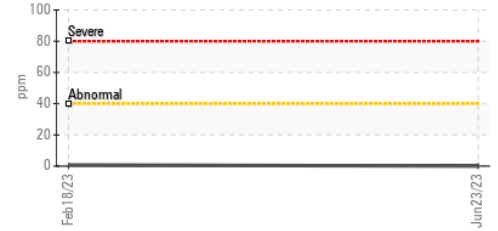


● Aluminum (ppm)

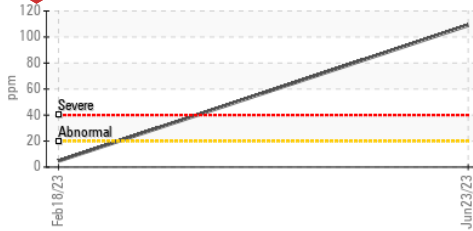


Chromium (ppm)

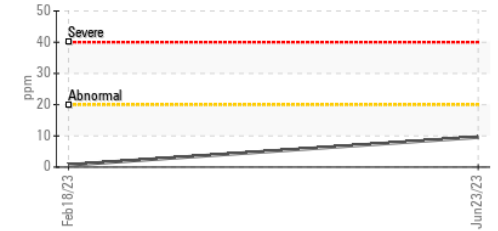


● Copper (ppm)

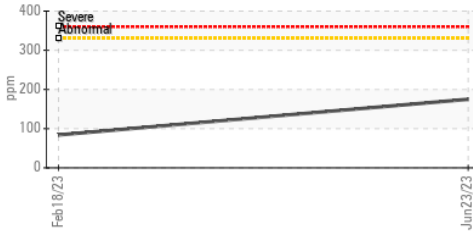


Silicon (ppm)

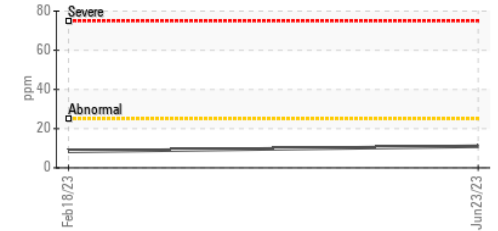

Viscosity @ 100°C

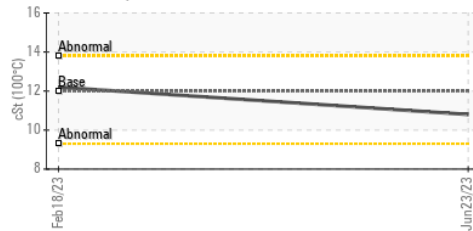

Base Number

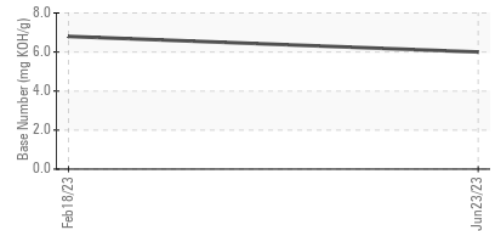

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0100765 **Received** : 07 Jul 2023
Lab Number : 05891953 **Diagnosed** : 10 Jul 2023
Unique Number : 10547763 **Diagnostician** : Don Baldrige
Test Package : MOB 1 (Additional Tests: Glycol, TBN)

MILLER TRUCK LEASING #118
 2196 BENNETT ROAD
 PHILADELPHIA, PA
 US 19116
 Contact: JOHN KEEN
 jkeen@millertransgroup.com
 T: (215)552-9832
 F: (215)552-9892

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)