




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

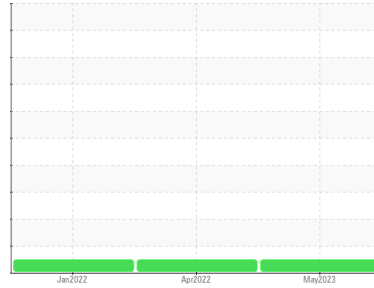

Machine Id  
**927100**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (8 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history 1	history 2
Sample Number	Client Info	<b>GFL0041846</b>	GFL0044459	GFL0041830
Sample Date	Client Info	<b>15 May 2023</b>	11 Apr 2022	24 Jan 2022
Machine Age	hrs	<b>186670</b>	186670	9479
Oil Age	hrs	<b>600</b>	0	600
Oil Changed	Client Info	<b>Changed</b>	Changed	Changed
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

method	limit/base	current	history 1	history 2
Fuel	WC Method >5	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history 1	history 2
Iron	ppm ASTM D5185m >100	<b>4</b>	6	14
Chromium	ppm ASTM D5185m >20	<b>&lt;1</b>	0	<1
Nickel	ppm ASTM D5185m >4	<b>0</b>	0	0
Titanium	ppm ASTM D5185m	<b>0</b>	0	<1
Silver	ppm ASTM D5185m >3	<b>0</b>	0	1
Aluminum	ppm ASTM D5185m >20	<b>2</b>	4	8
Lead	ppm ASTM D5185m >40	<b>0</b>	0	<1
Copper	ppm ASTM D5185m >330	<b>1</b>	5	8
Tin	ppm ASTM D5185m >15	<b>&lt;1</b>	0	<1
Antimony	ppm ASTM D5185m	<b>---</b>	---	<1
Vanadium	ppm ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history 1	history 2
Boron	ppm ASTM D5185m 0	<b>1</b>	2	14
Barium	ppm ASTM D5185m 0	<b>0</b>	0	<1
Molybdenum	ppm ASTM D5185m 60	<b>11</b>	61	65
Manganese	ppm ASTM D5185m 0	<b>&lt;1</b>	0	<1
Magnesium	ppm ASTM D5185m 1010	<b>155</b>	1094	997
Calcium	ppm ASTM D5185m 1070	<b>2139</b>	1170	1019
Phosphorus	ppm ASTM D5185m 1150	<b>918</b>	1130	923
Zinc	ppm ASTM D5185m 1270	<b>1117</b>	1274	1195
Sulfur	ppm ASTM D5185m 2060	<b>4343</b>	3007	2497

## CONTAMINANTS

method	limit/base	current	history 1	history 2
Silicon	ppm ASTM D5185m >25	<b>3</b>	2	6
Sodium	ppm ASTM D5185m	<b>8</b>	3	11
Potassium	ppm ASTM D5185m >20	<b>4</b>	0	17

## INFRA-RED



method	limit/base	current	history 1	history 2
Soot %	% *ASTM D7844 >3	<b>0.2</b>	0.5	0.7
Nitration	Abs/cm *ASTM D7624 >20	<b>6.8</b>	8.8	10.6
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>16.3</b>	19.4	22.3

## FLUID DEGRADATION

method	limit/base	current	history 1	history 2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>9.9</b>	15.0	17.8
Base Number (BN)	mg KOH/g ASTM D2896 9.8	<b>7.8</b>	9.8	7.8












# OIL ANALYSIS REPORT

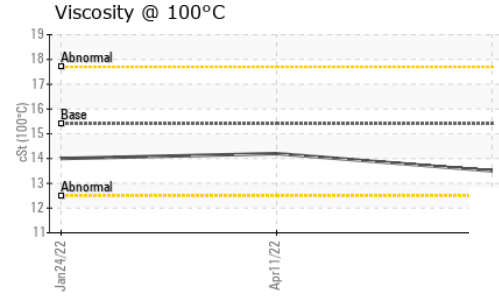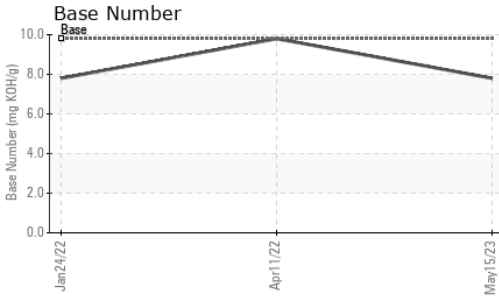

VISUAL	method	limit/base	current	history 1	history 2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history 1	history 2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.5</b>	14.2	14.0

## GRAPHS

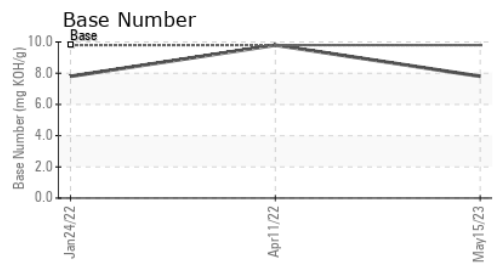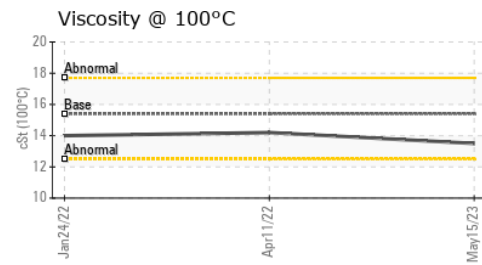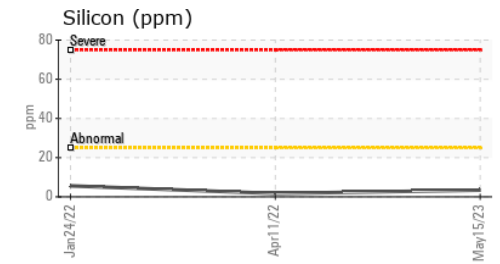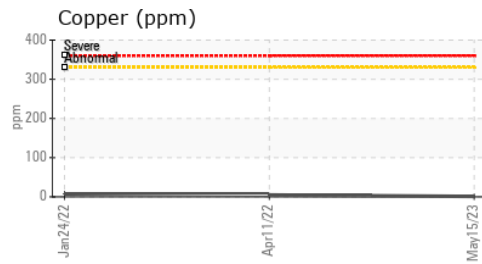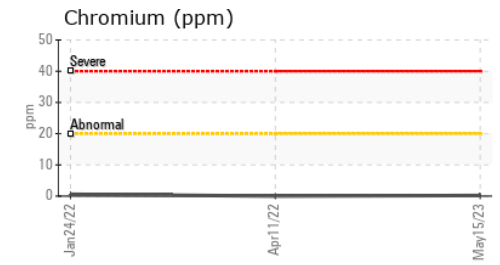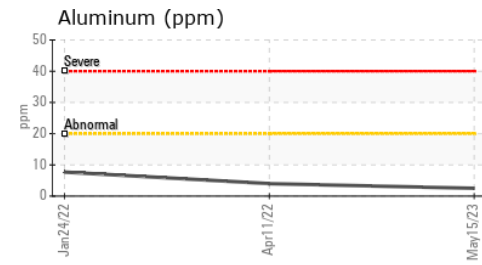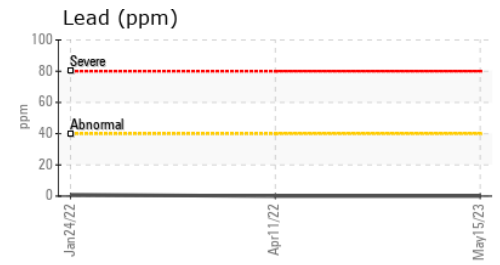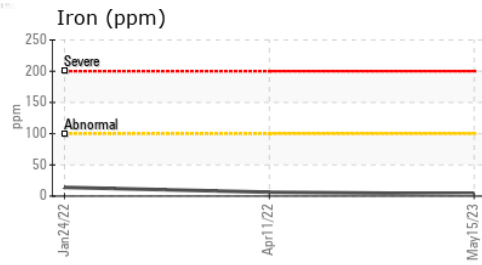

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0041846 **Received** : 07 Jul 2023  
**Lab Number** : **05892008** **Diagnosed** : 09 Jul 2023  
**Unique Number** : 10547818 **Diagnostician** : Doug Bogart  
**Test Package** : MOB1+

**GFL Environmental - 461 - Smith Hauling**  
 3239 W. M 28  
 Brimley, MI  
 US 49715  
 Contact: Jim Smith  
 jim.smith@gflenv.com  
 T: (906)635-3380  
 F:

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)