




OIL ANALYSIS REPORT

Sample Rating Trend

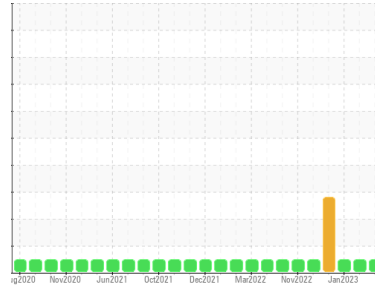

NORMAL



Machine Id
830009

Component
Natural Gas Engine

Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history 1	history 2
Sample Number	Client Info	GFL0082229	GFL0073823	GFL0069268
Sample Date	Client Info	06 Jul 2023	03 Apr 2023	19 Jan 2023
Machine Age	hrs	8239	7680	7172
Oil Age	hrs	1107	548	273
Oil Changed	Client Info	Changed	Not Changd	Not Changed
Sample Status		NORMAL	NORMAL	NORMAL

WEAR METALS

method	limit/base	current	history 1	history 2		
Iron	ppm	ASTM D5185m	>50	25	19	7
Chromium	ppm	ASTM D5185m	>4	5	3	<1
Nickel	ppm	ASTM D5185m	>2	<1	<1	<1
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m	>3	0	0	0
Aluminum	ppm	ASTM D5185m	>9	3	2	1
Lead	ppm	ASTM D5185m	>30	6	2	2
Copper	ppm	ASTM D5185m	>35	2	1	<1
Tin	ppm	ASTM D5185m	>4	<1	<1	<1
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0

ADDITIVES

method	limit/base	current	history 1	history 2		
Boron	ppm	ASTM D5185m	0	20	8	41
Barium	ppm	ASTM D5185m	0	0	0	0
Molybdenum	ppm	ASTM D5185m	60	59	58	46
Manganese	ppm	ASTM D5185m	0	2	1	<1
Magnesium	ppm	ASTM D5185m	1010	639	590	515
Calcium	ppm	ASTM D5185m	1070	1740	1737	1439
Phosphorus	ppm	ASTM D5185m	1150	847	715	702
Zinc	ppm	ASTM D5185m	1270	1070	1018	863
Sulfur	ppm	ASTM D5185m	2060	3130	3009	2773

CONTAMINANTS

method	limit/base	current	history 1	history 2		
Silicon	ppm	ASTM D5185m	>+100	6	5	5
Sodium	ppm	ASTM D5185m		7	8	4
Potassium	ppm	ASTM D5185m	>20	2	<1	1

INFRA-RED



method	limit/base	current	history 1	history 2		
Soot %	%	*ASTM D7844		0.1	0.1	0.1
Nitration	Abs/cm	*ASTM D7624	>20	10.8	11.4	6.9
Sulfation	Abs/.1mm	*ASTM D7415	>30	23.5	22.5	19.2

FLUID DEGRADATION

method	limit/base	current	history 1	history 2		
Oxidation	Abs/.1mm	*ASTM D7414	>25	18.7	18.3	15.6
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	6.5	4.1	8.4







OIL ANALYSIS REPORT

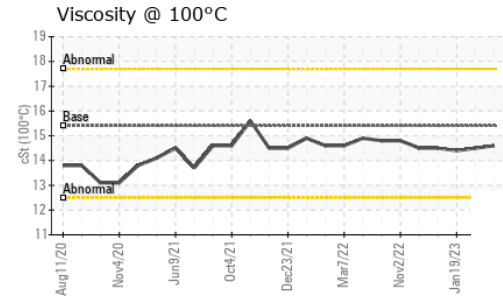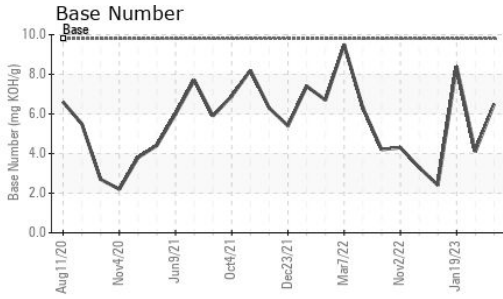

VISUAL	method	limit/base	current	history 1	history 2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history 1	history 2	
Visc @ 100°C	cSt	ASTM D445	15.4	14.6	14.5	14.4

GRAPHS

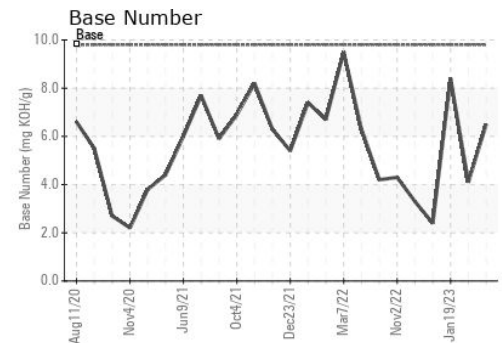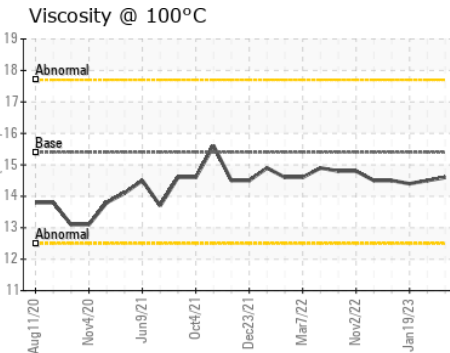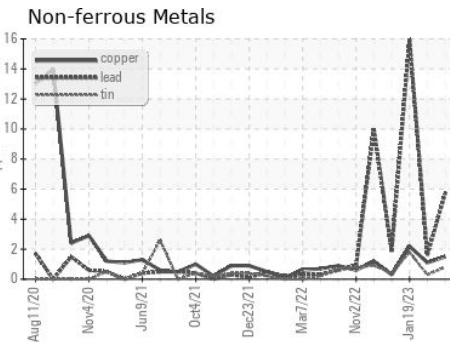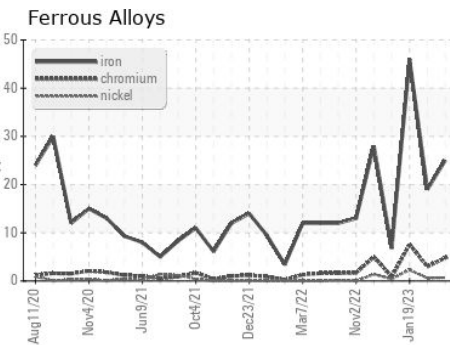

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0082229
Lab Number : **05892073**
Unique Number : 10547883
Test Package : FLEET

GFL Environmental - 006 - Wilmington
 3618 US Highway 421 N
 Wilmington, NC
 US 28401
 Contact: Eric Wood
 eric.wood@gflenv.com
 T: (717)723-1956
 F: (910)762-6880

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)