




# OIL ANALYSIS REPORT

Sample Rating Trend

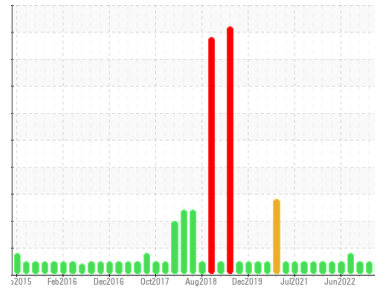

**NORMAL**



Machine Id  
**2337 MACK GRANITE**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (48 QTS)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history 1	history 2
Sample Number	Client Info	<b>GFL0087101</b>	GFL0056618	GFL0056558
Sample Date	Client Info	<b>06 Jul 2023</b>	27 Mar 2023	29 Nov 2022
Machine Age	hrs	<b>39082</b>	38601	37903
Oil Age	hrs	<b>0</b>	1311	1336
Oil Changed	Client Info	<b>N/A</b>	Changed	Changed
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

method	limit/base	current	history 1	history 2
Fuel	WC Method >3.0	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history 1	history 2
Iron	ppm ASTM D5185m >120	<b>30</b>	38	39
Chromium	ppm ASTM D5185m >20	<b>&lt;1</b>	<1	<1
Nickel	ppm ASTM D5185m >5	<b>&lt;1</b>	<1	0
Titanium	ppm ASTM D5185m >2	<b>&lt;1</b>	0	0
Silver	ppm ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm ASTM D5185m >20	<b>6</b>	2	<1
Lead	ppm ASTM D5185m >40	<b>3</b>	7	4
Copper	ppm ASTM D5185m >330	<b>4</b>	14	36
Tin	ppm ASTM D5185m >15	<b>&lt;1</b>	1	1
Vanadium	ppm ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history 1	history 2
Boron	ppm ASTM D5185m 0	<b>6</b>	7	6
Barium	ppm ASTM D5185m 0	<b>0</b>	<1	0
Molybdenum	ppm ASTM D5185m 60	<b>67</b>	58	61
Manganese	ppm ASTM D5185m 0	<b>&lt;1</b>	<1	<1
Magnesium	ppm ASTM D5185m 1010	<b>940</b>	776	885
Calcium	ppm ASTM D5185m 1070	<b>1107</b>	1082	1098
Phosphorus	ppm ASTM D5185m 1150	<b>1043</b>	890	949
Zinc	ppm ASTM D5185m 1270	<b>1295</b>	1095	1166
Sulfur	ppm ASTM D5185m 2060	<b>3736</b>	2693	3335

## CONTAMINANTS

method	limit/base	current	history 1	history 2
Silicon	ppm ASTM D5185m >25	<b>8</b>	3	4
Sodium	ppm ASTM D5185m	<b>&lt;1</b>	0	2
Potassium	ppm ASTM D5185m >20	<b>7</b>	7	0

## INFRA-RED



method	limit/base	current	history 1	history 2
Soot %	% *ASTM D7844 >4	<b>3</b>	3.7	3.2
Nitration	Abs/cm *ASTM D7624 >20	<b>9.0</b>	10.2	9.7
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>23.7</b>	26.1	25.4

## FLUID DEGRADATION

method	limit/base	current	history 1	history 2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>14.7</b>	16.7	15.9
Base Number (BN)	mg KOH/g ASTM D2896 9.8	<b>8.3</b>	6.4	9.0







# OIL ANALYSIS REPORT

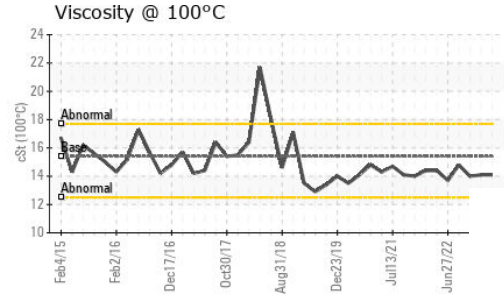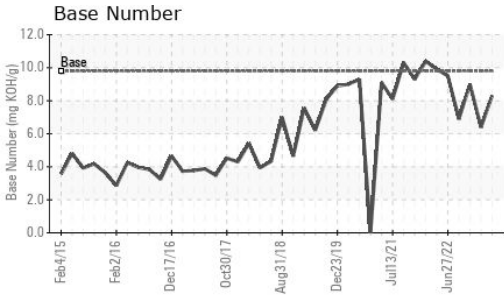

VISUAL	method	limit/base	current	history 1	history 2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history 1	history 2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>14.1</b>	14.1	14.0

## GRAPHS

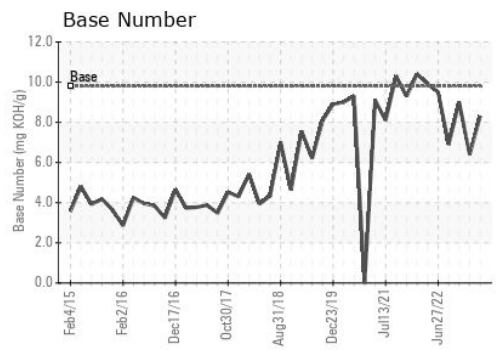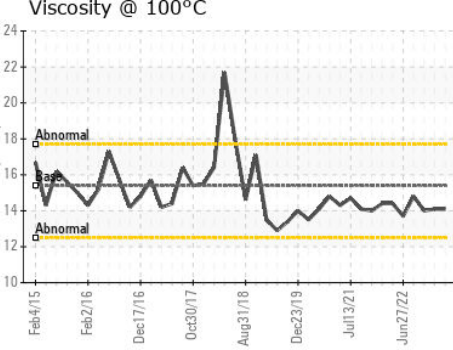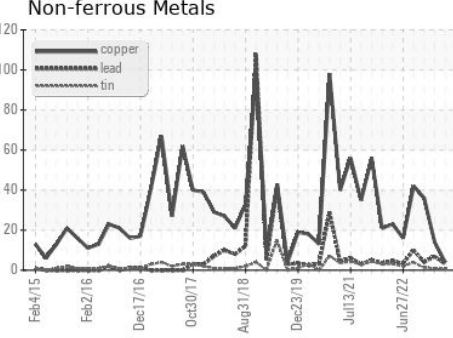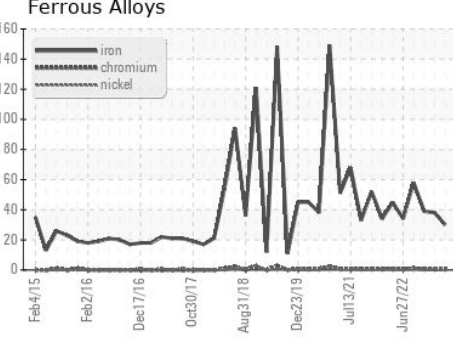

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0087101 **Received** : 07 Jul 2023  
**Lab Number** : **05892641** **Diagnosed** : 10 Jul 2023  
**Unique Number** : 10548451 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 001 - Raleigh(CNG)**  
 3741 Conquest Drive  
 Garner, NC  
 US 27529  
 Contact: Craig Johnson  
 craig.johnson@gflenv.com  
 T: (919)662-7100  
 F: (919)662-7130

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)