




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

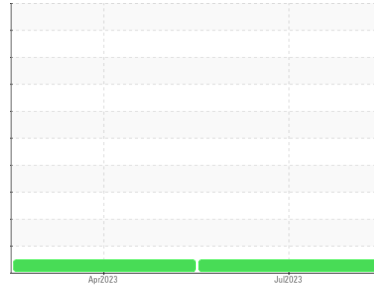

Machine Id
3589C AUTOCAR ACX

Component
Natural Gas Engine

Fluid
PETRO CANADA DURON GEO LD 15W40 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history 1	history 2
Sample Number	Client Info	GFL0087100	GFL0056613	---
Sample Date	Client Info	05 Jul 2023	11 Apr 2023	---
Machine Age	hrs Client Info	2017	22641	---
Oil Age	hrs Client Info	2017	1235	---
Oil Changed	Client Info	N/A	Changed	---
Sample Status		NORMAL	NORMAL	---

WEAR METALS

method	limit/base	current	history 1	history 2
Iron ppm ASTM D5185m	>50	8	9	---
Chromium ppm ASTM D5185m	>4	<1	<1	---
Nickel ppm ASTM D5185m	>2	0	0	---
Titanium ppm ASTM D5185m		0	<1	---
Silver ppm ASTM D5185m	>3	0	0	---
Aluminum ppm ASTM D5185m	>9	3	2	---
Lead ppm ASTM D5185m	>30	<1	0	---
Copper ppm ASTM D5185m	>35	<1	<1	---
Tin ppm ASTM D5185m	>4	<1	0	---
Vanadium ppm ASTM D5185m		0	0	---
Cadmium ppm ASTM D5185m		0	0	---

ADDITIVES

method	limit/base	current	history 1	history 2
Boron ppm ASTM D5185m	50	14	11	---
Barium ppm ASTM D5185m	5	0	0	---
Molybdenum ppm ASTM D5185m	50	54	52	---
Manganese ppm ASTM D5185m	0	<1	<1	---
Magnesium ppm ASTM D5185m	560	602	546	---
Calcium ppm ASTM D5185m	1510	1673	1642	---
Phosphorus ppm ASTM D5185m	780	768	699	---
Zinc ppm ASTM D5185m	870	1030	968	---
Sulfur ppm ASTM D5185m	2040	3047	2927	---

CONTAMINANTS

method	limit/base	current	history 1	history 2
Silicon ppm ASTM D5185m	>+100	4	3	---
Sodium ppm ASTM D5185m		6	2	---
Potassium ppm ASTM D5185m	>20	2	0	---

INFRA-RED



method	limit/base	current	history 1	history 2
Soot % *ASTM D7844		0.1	0	---
Nitration Abs/cm *ASTM D7624	>20	10.2	9.9	---
Sulfation Abs/.1mm *ASTM D7415	>30	21.0	19.3	---

FLUID DEGRADATION

method	limit/base	current	history 1	history 2
Oxidation Abs/.1mm *ASTM D7414	>25	17.8	17.0	---
Base Number (BN) mg KOH/g ASTM D2896	10.2	6.3	4.5	---







OIL ANALYSIS REPORT

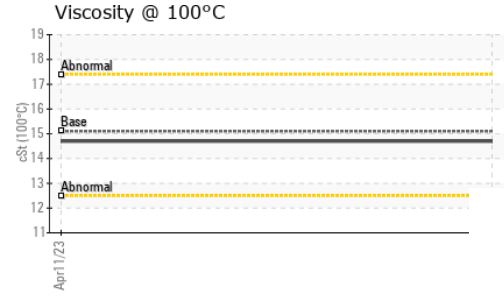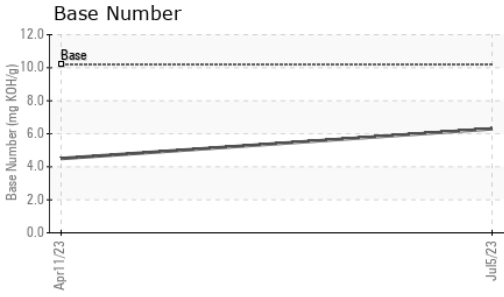

VISUAL	method	limit/base	current	history 1	history 2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history 1	history 2	
Visc @ 100°C	cSt	ASTM D445	15.1	14.7	14.7	---

GRAPHS

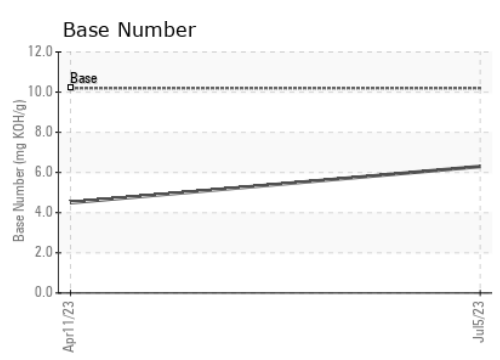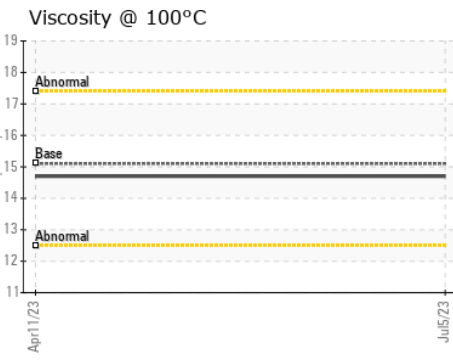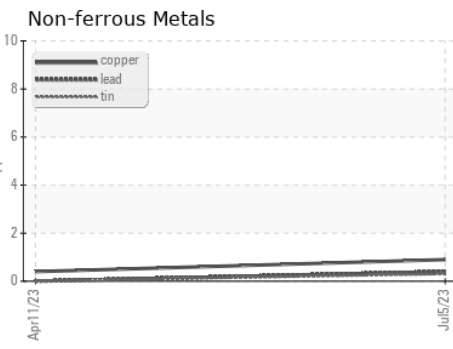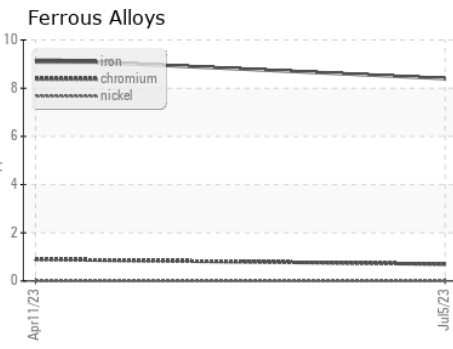

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0087100 **Received** : 07 Jul 2023
Lab Number : **05892642** **Diagnosed** : 10 Jul 2023
Unique Number : 10548452 **Diagnostician** : Wes Davis
Test Package : FLEET

GFL Environmental - 001 - Raleigh(CNG)
 3741 Conquest Drive
 Garner, NC
 US 27529
 Contact: James Lawson
 james.lawson@gflenv.com
 T: (919)534-3733
 F: (919)662-1730

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)