




PROBLEM SUMMARY

Sample Rating Trend



FUEL



Machine Id
720022-310085
Component
Diesel Engine
Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

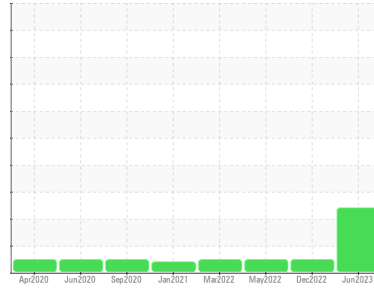

COMPONENT CONDITION SUMMARY

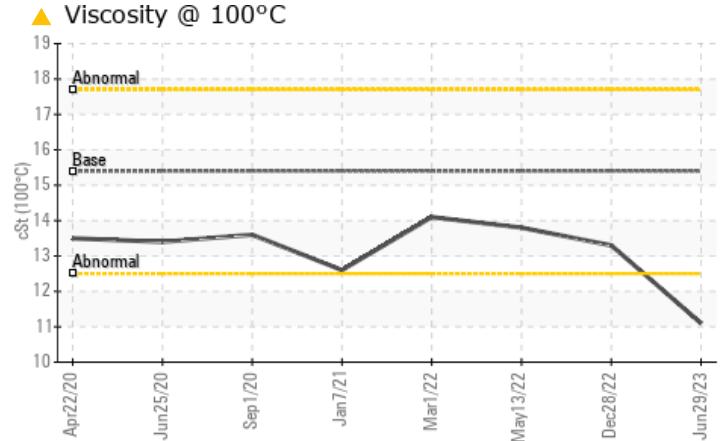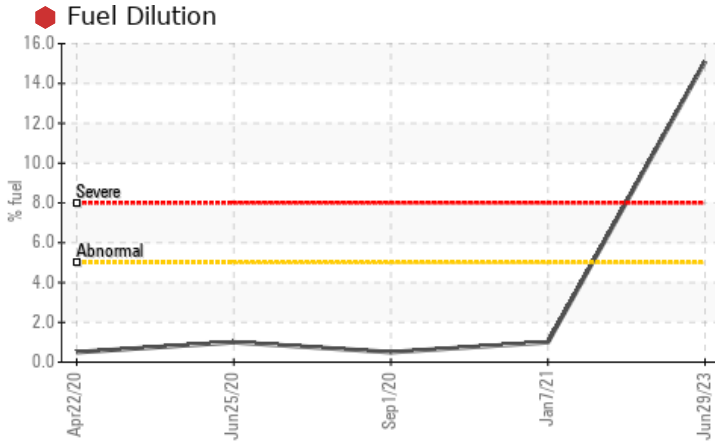

RECOMMENDATION

We advise that you check the fuel injection system. The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

PROBLEMATIC TEST RESULTS

Sample Status				SEVERE	NORMAL	NORMAL
Fuel	%	ASTM D3524	>5	15.1	<1.0	<1.0
Visc @ 100°C	cSt	ASTM D445	15.4	11.1	13.3	13.8

Customer Id: GFL837
Sample No.: GFL0087739
Lab Number: 05892804
Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data:
Wes Davis +1 905-569-8600 x223
wesd@wearcheck.ca

To change component or sample information:
Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Resample	---	---	?	We recommend an early resample to monitor this condition.
Check Fuel/injector System	---	---	?	We advise that you check the fuel injection system.

HISTORICAL DIAGNOSIS

28 Dec 2022 Diag: Wes Davis

NORMAL



Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. All component wear rates are normal. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

view report



13 May 2022 Diag: Wes Davis

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

view report



01 Mar 2022 Diag: Wes Davis

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

view report






OIL ANALYSIS REPORT

Sample Rating Trend

FUEL



Machine Id
720022-310085
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

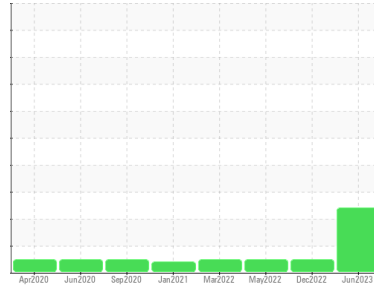

DIAGNOSIS

Recommendation

We advise that you check the fuel injection system. The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

Wear

All component wear rates are normal.

Contamination

There is a high amount of fuel present in the oil. Tests confirm the presence of fuel in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.

SAMPLE INFORMATION

method	limit/base	current	history 1	history 2
Sample Number	Client Info	GFL0087739	GFL0062954	GFL0039575
Sample Date	Client Info	29 Jun 2023	28 Dec 2022	13 May 2022
Machine Age	hrs	9705	8667	7074
Oil Age	hrs	0	0	547
Oil Changed	Client Info	Changed	Changed	Changed
Sample Status		SEVERE	NORMAL	NORMAL

CONTAMINATION

method	limit/base	current	history 1	history 2
Glycol	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history 1	history 2	
Iron	ppm	ASTM D5185m >80	19	27	26
Chromium	ppm	ASTM D5185m >5	<1	<1	<1
Nickel	ppm	ASTM D5185m >2	<1	<1	0
Titanium	ppm	ASTM D5185m	0	0	0
Silver	ppm	ASTM D5185m >3	0	0	<1
Aluminum	ppm	ASTM D5185m >30	1	4	2
Lead	ppm	ASTM D5185m >30	0	1	<1
Copper	ppm	ASTM D5185m >150	1	2	2
Tin	ppm	ASTM D5185m >5	<1	<1	<1
Antimony	ppm	ASTM D5185m	---	---	---
Vanadium	ppm	ASTM D5185m	0	0	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

method	limit/base	current	history 1	history 2	
Boron	ppm	ASTM D5185m 0	0	3	2
Barium	ppm	ASTM D5185m 0	0	0	0
Molybdenum	ppm	ASTM D5185m 60	49	57	63
Manganese	ppm	ASTM D5185m 0	<1	<1	<1
Magnesium	ppm	ASTM D5185m 1010	757	928	919
Calcium	ppm	ASTM D5185m 1070	911	1121	1058
Phosphorus	ppm	ASTM D5185m 1150	810	956	1013
Zinc	ppm	ASTM D5185m 1270	1042	1322	1251
Sulfur	ppm	ASTM D5185m 2060	2560	3212	3564

CONTAMINANTS

method	limit/base	current	history 1	history 2	
Silicon	ppm	ASTM D5185m >20	5	6	6
Sodium	ppm	ASTM D5185m	6	7	8
Potassium	ppm	ASTM D5185m >20	2	6	1
Fuel	%	ASTM D3524 >5	15.1	<1.0	<1.0

INFRA-RED




method	limit/base	current	history 1	history 2	
Soot %	%	*ASTM D7844 >3	0.6	0.6	0.6
Nitration	Abs/cm	*ASTM D7624 >20	11.8	10.0	10.2
Sulfation	Abs/.1mm	*ASTM D7415 >30	22.5	20.4	20.9

FLUID DEGRADATION

method	limit/base	current	history 1	history 2	
Oxidation	Abs/.1mm	*ASTM D7414 >25	22.9	18.6	18.9
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	6.9	7.9	8.2







OIL ANALYSIS REPORT

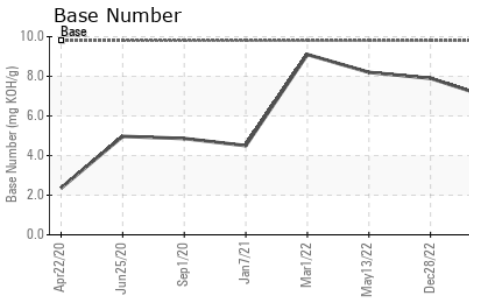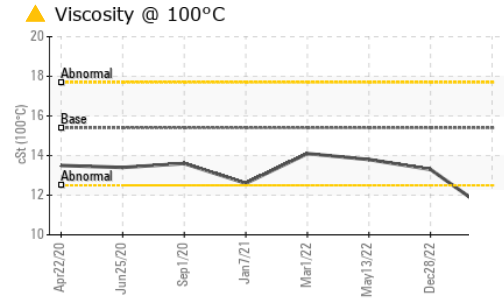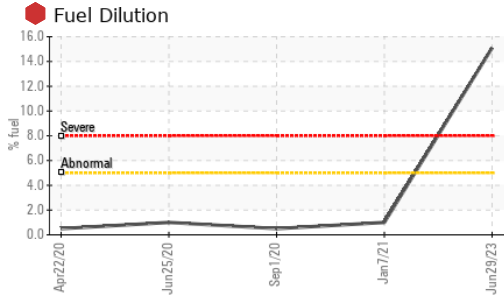

VISUAL	method	limit/base	current	history 1	history 2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history 1	history 2
Visc @ 100°C	cSt	ASTM D445	▲ 11.1	13.3	13.8

GRAPHS

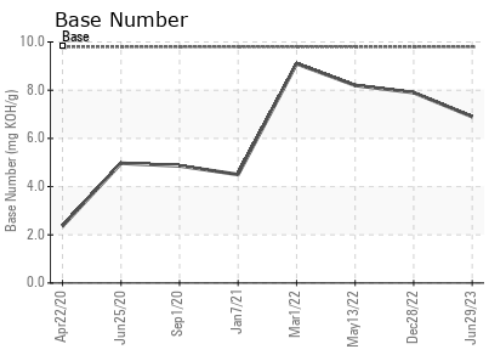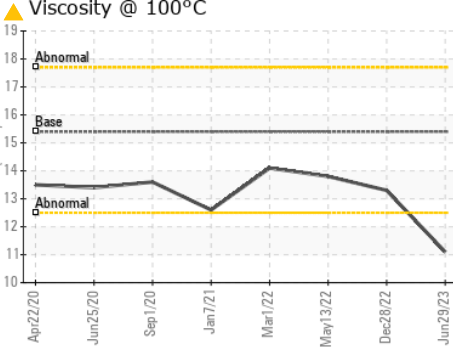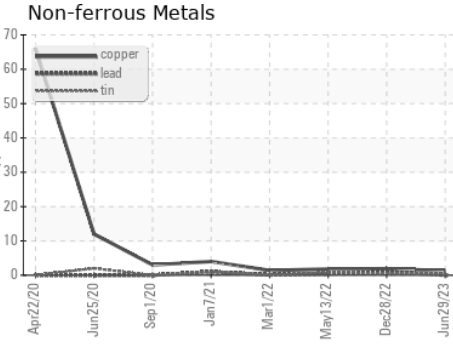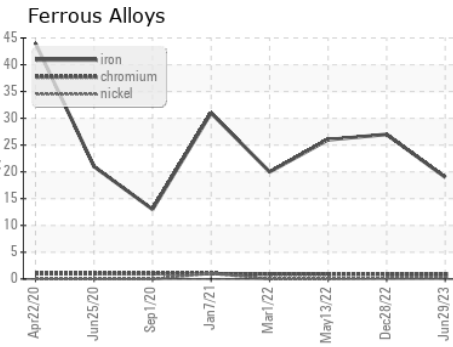

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0087739
Lab Number : 05892804
Unique Number : 10548614
Test Package : FLEET (Additional Tests: FuelDilution, PercentFuel)

GFL Environmental - 837 - Harrison TS
 22820 S State Route 291
 Harrisonville, MO
 US 64701
 Contact: Robert Hart

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (580)461-1509

F: