




PROBLEM SUMMARY

Sample Rating Trend

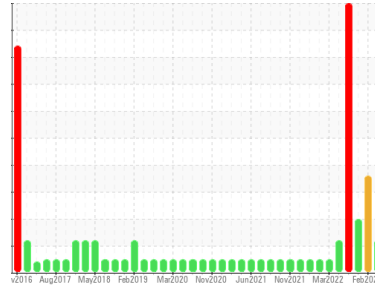


GLYCOL



Machine Id
3719
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 15W40 (10 GAL)

COMPONENT CONDITION SUMMARY

▲ Glycol Contamination

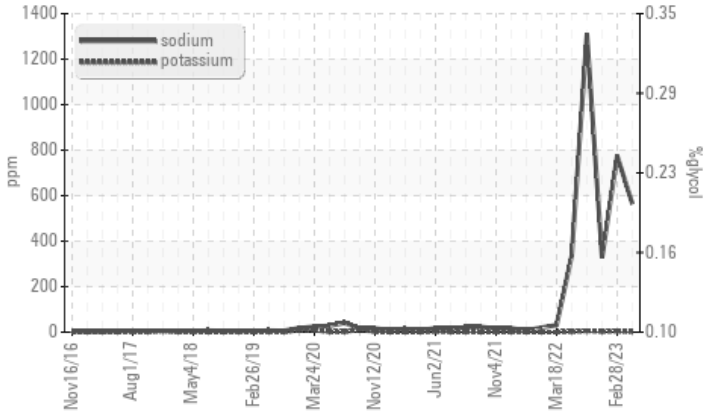

RECOMMENDATION

We advise that you check for the source of the coolant leak. Check for low coolant level. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

PROBLEMATIC TEST RESULTS

Sample Status			ABNORMAL	ABNORMAL	ATTENTION
Sodium	ppm	ASTM D5185m	▲ 565	▲ 775	▲ 328

Customer Id: GFL029
 Sample No.: GFL0079025
 Lab Number: 05892805
 Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Jonathan Hester +1 919-379-4092 x4092
jhester@wearcheckusa.com

To change component or sample information:
 Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Fluid	---	---	?	Oil and filter change at the time of sampling has been noted.
Change Filter	---	---	?	Oil and filter change at the time of sampling has been noted.
Resample	---	---	?	We recommend an early resample to monitor this condition.
Check Glycol Access	---	---	?	We advise that you check for the source of the coolant leak.

HISTORICAL DIAGNOSIS

28 Feb 2023 Diag: Jonathan Hester

DIRT



We advise that you check for possible coolant leak. Check for low coolant level. We advise that you check the air filter, air induction system, and any areas where dirt may enter the component. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition. All component wear rates are normal. Sodium and/or potassium levels are high. Elemental levels of silicon (Si) and aluminum (Al) indicate alumina-silicate (coarse dirt) ingress. The BN result indicates that there is suitable alkalinity remaining in the oil.

[view report](#)



10 Aug 2022 Diag: Jonathan Hester

GLYCOL



Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. All component wear rates are normal. Sodium and/or potassium levels remain high. Light fuel dilution occurring. Test for glycol is negative. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

[view report](#)



04 Aug 2022 Diag: Jonathan Hester

GLYCOL



We advise that you check for the source of the coolant leak. Check for low coolant level. We advise that you check the fuel injection system. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition. All component wear rates are normal. Sodium and/or potassium levels are high. Test for glycol is positive. There is a moderate amount of fuel present in the oil. Elemental level of silicon (Si) above normal indicating ingress of seal material. Fuel is present in the oil and is lowering the viscosity. The BN result indicates that there is suitable alkalinity remaining in the oil.


[view report](#)





OIL ANALYSIS REPORT

Sample Rating Trend

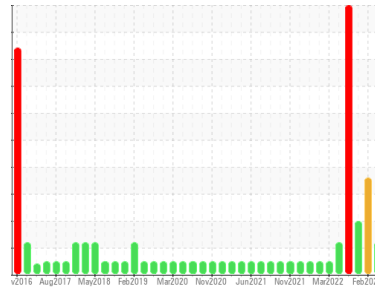

GLYCOL



Machine Id
3719

Component

Diesel Engine

Fluid

PETRO CANADA DURON SHP 15W40 (10 GAL)

DIAGNOSIS

▲ Recommendation

We advise that you check for the source of the coolant leak. Check for low coolant level. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

Wear

All component wear rates are normal.

Contamination

Sodium and/or potassium levels remain high.

▲ Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil.

SAMPLE INFORMATION

method	limit/base	current	history 1	history 2	
Sample Number	Client Info	GFL0079025	GFL0049465	GFL0049399	
Sample Date	Client Info	03 Jul 2023	28 Feb 2023	10 Aug 2022	
Machine Age	mls	Client Info	236884	236884	10374
Oil Age	mls	Client Info	236884	0	10374
Oil Changed	Client Info	Changed	Changed	Changed	
Sample Status		ABNORMAL	ABNORMAL	ATTENTION	

CONTAMINATION

method	limit/base	current	history 1	history 2
Fuel	WC Method >3.0	<1.0	<1.0	▲ 2.1

WEAR METALS

method	limit/base	current	history 1	history 2	
Iron	ppm	ASTM D5185m >75	26	34	10
Chromium	ppm	ASTM D5185m >5	2	3	1
Nickel	ppm	ASTM D5185m >4	<1	2	0
Titanium	ppm	ASTM D5185m >2	0	<1	0
Silver	ppm	ASTM D5185m >2	0	0	<1
Aluminum	ppm	ASTM D5185m >15	3	▲ 10	2
Lead	ppm	ASTM D5185m >25	<1	1	<1
Copper	ppm	ASTM D5185m >100	6	7	6
Tin	ppm	ASTM D5185m >4	<1	<1	<1
Vanadium	ppm	ASTM D5185m	<1	<1	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

method	limit/base	current	history 1	history 2	
Boron	ppm	ASTM D5185m 0	26	24	20
Barium	ppm	ASTM D5185m 0	0	2	0
Molybdenum	ppm	ASTM D5185m 60	73	83	63
Manganese	ppm	ASTM D5185m 0	<1	<1	<1
Magnesium	ppm	ASTM D5185m 1010	833	844	855
Calcium	ppm	ASTM D5185m 1070	1057	1003	1151
Phosphorus	ppm	ASTM D5185m 1150	993	928	1027
Zinc	ppm	ASTM D5185m 1270	1186	1151	1165
Sulfur	ppm	ASTM D5185m 2060	3208	2656	3175

CONTAMINANTS

method	limit/base	current	history 1	history 2	
Silicon	ppm	ASTM D5185m >25	19	▲ 26	11
Sodium	ppm	ASTM D5185m	▲ 565	▲ 775	▲ 328
Potassium	ppm	ASTM D5185m >20	2	4	2
Glycol	%	*ASTM D2982	NEG	NEG	NEG

INFRA-RED




method	limit/base	current	history 1	history 2	
Soot %	%	*ASTM D7844 >6	0.3	0.5	0.3
Nitration	Abs/cm	*ASTM D7624 >20	9.2	13.4	8.7
Sulfation	Abs/.1mm	*ASTM D7415 >30	18.1	20.9	19.6

FLUID DEGRADATION

method	limit/base	current	history 1	history 2	
Oxidation	Abs/.1mm	*ASTM D7414 >25	14.1	16.4	14.3
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	12.3	9.7	11.2







OIL ANALYSIS REPORT

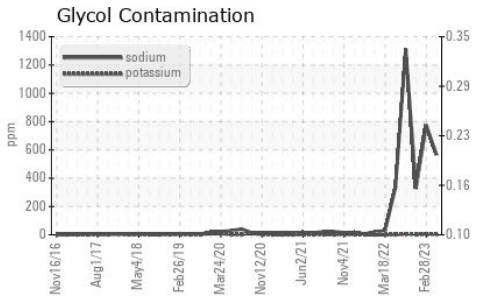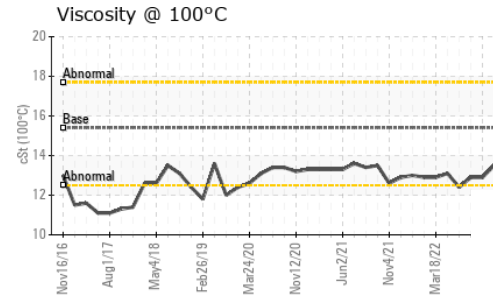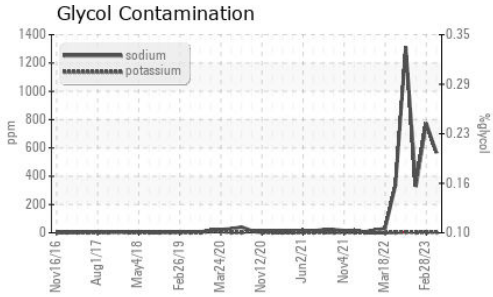

VISUAL	method	limit/base	current	history 1	history 2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history 1	history 2
Visc @ 100°C	cSt	ASTM D445	15.4	13.5	12.9

GRAPHS

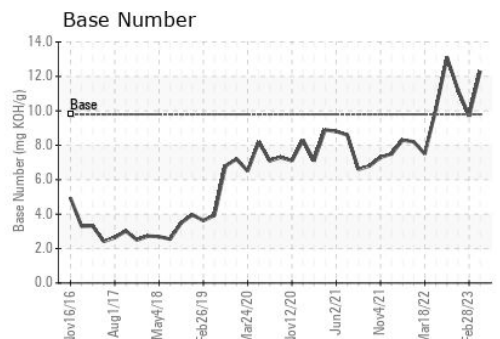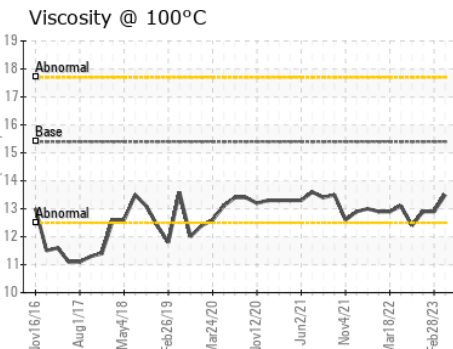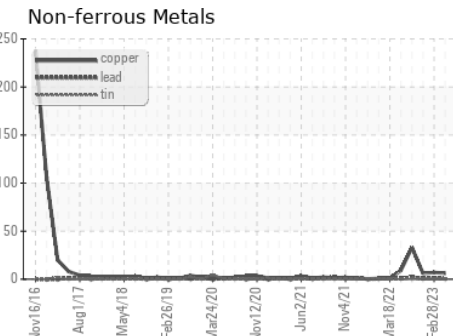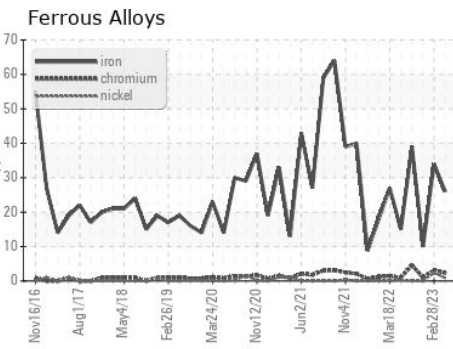

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0079025
Lab Number : 05892805
Unique Number : 10548615
Test Package : FLEET (Additional Tests: Glycol)

GFL Environmental - 029 - Wytheville
 2390 North 4th Street
 Wytheville, VA
 US 24382
 Contact: CHARLES CORVIN
 charles.corvin@gflenv.com; canastasio@wearcheckusa.com
 T: (276)223-4476
 F: (276)223-1283

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)