


OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL

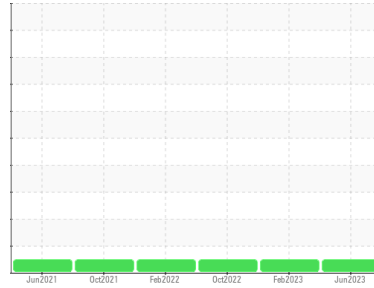

Machine Id
310134
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 10W30 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Wear

Metal levels are typical for a new component breaking in.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history 1	history 2
Sample Number	Client Info	PCA0098997	PCA0089912	PCA0082201
Sample Date	Client Info	22 Jun 2023	14 Feb 2023	29 Oct 2022
Machine Age	mls Client Info	64448	54996	47500
Oil Age	mls Client Info	9444	0	10156
Oil Changed	Client Info	Changed	Changed	Changed
Sample Status		NORMAL	NORMAL	NORMAL

CONTAMINATION

method	limit/base	current	history 1	history 2
Fuel	WC Method >5	<1.0	<1.0	<1.0
Glycol	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history 1	history 2
Iron	ppm ASTM D5185m >100	15	14	23
Chromium	ppm ASTM D5185m >20	<1	<1	1
Nickel	ppm ASTM D5185m >4	<1	<1	<1
Titanium	ppm ASTM D5185m	0	0	0
Silver	ppm ASTM D5185m >3	<1	<1	<1
Aluminum	ppm ASTM D5185m >20	2	5	9
Lead	ppm ASTM D5185m >40	2	2	4
Copper	ppm ASTM D5185m >330	2	6	37
Tin	ppm ASTM D5185m >15	<1	<1	2
Antimony	ppm ASTM D5185m	---	---	---
Vanadium	ppm ASTM D5185m	0	0	0
Cadmium	ppm ASTM D5185m	0	0	0

ADDITIVES

method	limit/base	current	history 1	history 2
Boron	ppm ASTM D5185m 2	9	6	8
Barium	ppm ASTM D5185m 0	0	0	0
Molybdenum	ppm ASTM D5185m 50	70	65	64
Manganese	ppm ASTM D5185m 0	<1	<1	1
Magnesium	ppm ASTM D5185m 950	839	908	868
Calcium	ppm ASTM D5185m 1050	1158	1145	1136
Phosphorus	ppm ASTM D5185m 995	1013	1003	898
Zinc	ppm ASTM D5185m 1180	1175	1264	1097
Sulfur	ppm ASTM D5185m 2600	3088	3692	2811

CONTAMINANTS

method	limit/base	current	history 1	history 2
Silicon	ppm ASTM D5185m >25	3	3	5
Sodium	ppm ASTM D5185m	0	4	6
Potassium	ppm ASTM D5185m >20	6	7	17



INFRA-RED

method	limit/base	current	history 1	history 2
Soot %	% *ASTM D7844 >3	1	0.9	1.2
Nitration	Abs/cm *ASTM D7624 >20	11.0	10.1	12.3
Sulfation	Abs/.1mm *ASTM D7415 >30	20.5	19.7	23.1

FLUID DEGRADATION

method	limit/base	current	history 1	history 2
Oxidation	Abs/.1mm *ASTM D7414 >25	18.0	17.1	20.2
Base Number (BN)	mg KOH/g ASTM D2896	8.7	8.6	9









OIL ANALYSIS REPORT

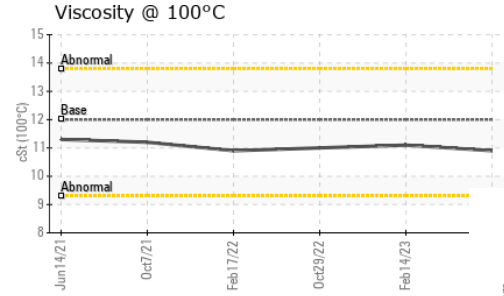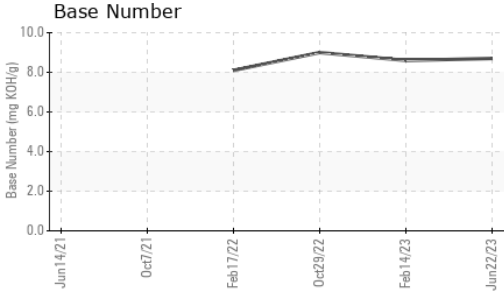

VISUAL	method	limit/base	current	history 1	history 2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history 1	history 2
Visc @ 100°C	cSt	ASTM D445	12.00	10.9	11.1

GRAPHS

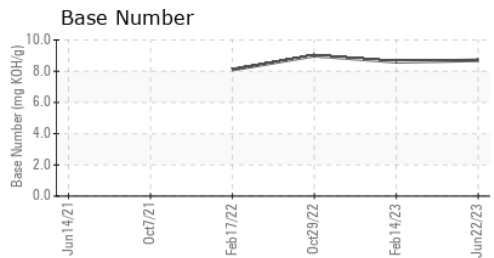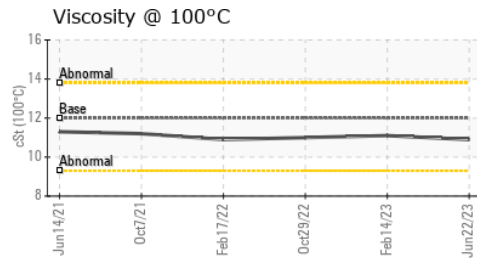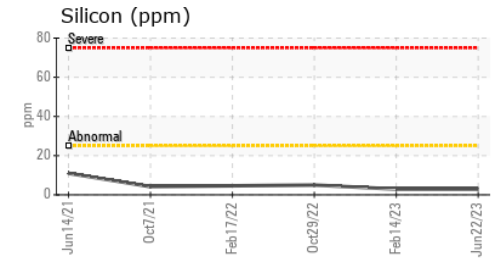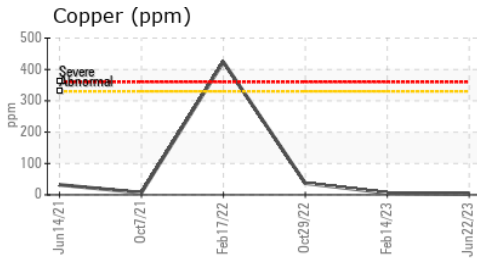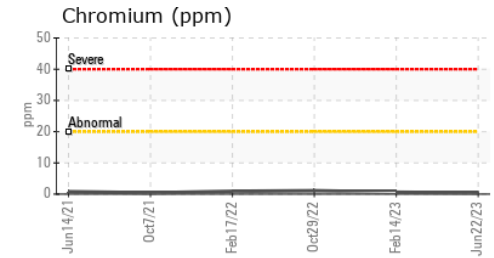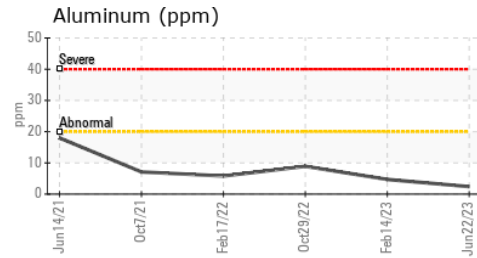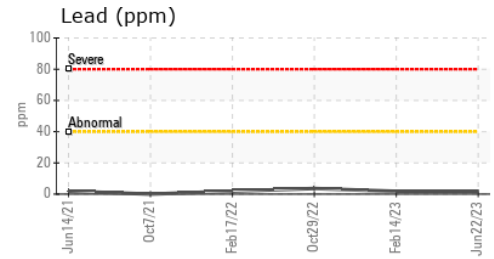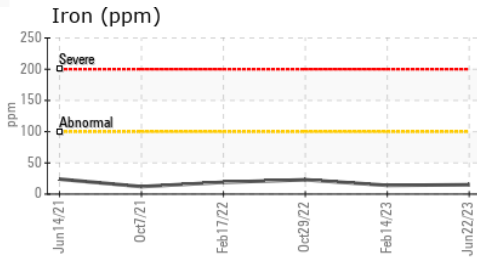

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0098997 **Received** : 10 Jul 2023
Lab Number : 05893496 **Diagnosed** : 11 Jul 2023
Unique Number : 10549306 **Diagnostician** : Wes Davis
Test Package : MOB 1 (Additional Tests: TBN)

MILLER TRUCK LEASING #112
 1504 MAINLINE DR
 CINNAMINSON, NJ
 US 08077
 Contact: MIKE BOYER
 mboyer@millertransgroup.com
 T: (856)662-4264
 F: (856)663-4898

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)