




# OIL ANALYSIS REPORT

Sample Rating Trend

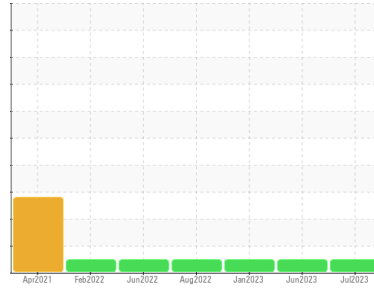

**NORMAL**



Machine Id  
**229011-1226**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON HP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history 1	history 2
Sample Number	Client Info	<b>GFL0062203</b>	GFL0062186	GFL0062216
Sample Date	Client Info	<b>05 Jul 2023</b>	26 Jun 2023	23 Jan 2023
Machine Age	hrs	<b>4072</b>	4057	3594
Oil Age	hrs	<b>494</b>	463	288
Oil Changed	Client Info	<b>Changed</b>	Not Changd	Not Changd
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

method	limit/base	current	history 1	history 2
Fuel	WC Method >2.0	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history 1	history 2	
Iron	ppm	ASTM D5185m >100	<b>35</b>	33	28
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m >4	<b>&lt;1</b>	<1	0
Titanium	ppm	ASTM D5185m	<b>0</b>	0	<1
Silver	ppm	ASTM D5185m >3	<b>&lt;1</b>	0	0
Aluminum	ppm	ASTM D5185m >20	<b>14</b>	17	14
Lead	ppm	ASTM D5185m >40	<b>0</b>	0	0
Copper	ppm	ASTM D5185m >330	<b>3</b>	3	2
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	<1	0
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history 1	history 2	
Boron	ppm	ASTM D5185m	<b>30</b>	31	4
Barium	ppm	ASTM D5185m	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	<b>50</b>	50	61
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	<b>661</b>	755	864
Calcium	ppm	ASTM D5185m	<b>1367</b>	1422	1076
Phosphorus	ppm	ASTM D5185m	<b>949</b>	1005	992
Zinc	ppm	ASTM D5185m	<b>1160</b>	1270	1178
Sulfur	ppm	ASTM D5185m	<b>2972</b>	3730	2952

## CONTAMINANTS

method	limit/base	current	history 1	history 2	
Silicon	ppm	ASTM D5185m >25	<b>4</b>	4	5
Sodium	ppm	ASTM D5185m	<b>0</b>	2	1
Potassium	ppm	ASTM D5185m >20	<b>20</b>	15	19

## INFRA-RED



method	limit/base	current	history 1	history 2	
Soot %	%	*ASTM D7844 >3	<b>0.7</b>	0.7	0.4
Nitration	Abs/cm	*ASTM D7624 >20	<b>10.9</b>	10.0	7.9
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>21.5</b>	21.4	18.1

## FLUID DEGRADATION

method	limit/base	current	history 1	history 2	
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>18.6</b>	19.0	14.1
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>7.6</b>	6.9	8.7







# OIL ANALYSIS REPORT

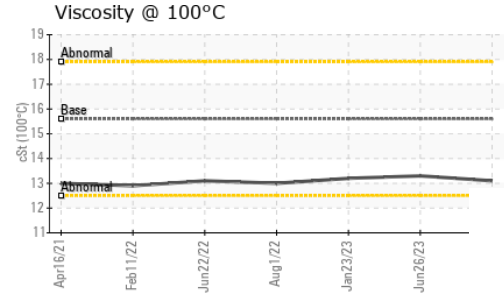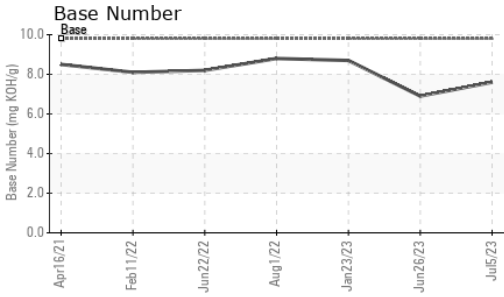

VISUAL	method	limit/base	current	history 1	history 2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history 1	history 2	
Visc @ 100°C	cSt	ASTM D445	15.6	<b>13.1</b>	13.3	13.2

## GRAPHS

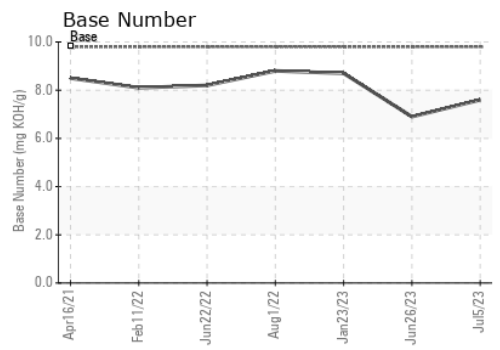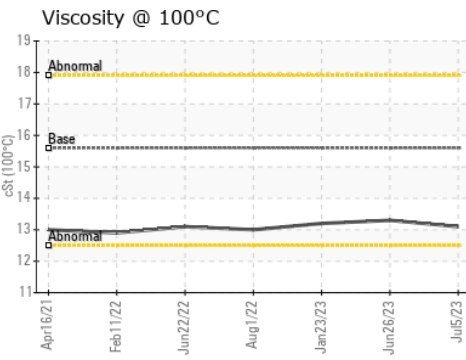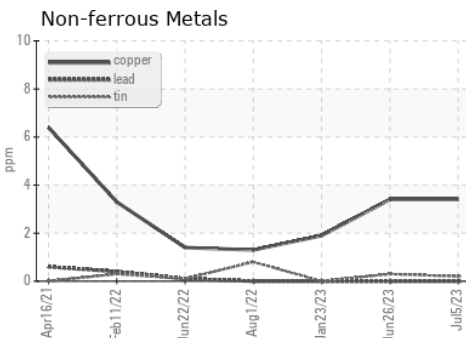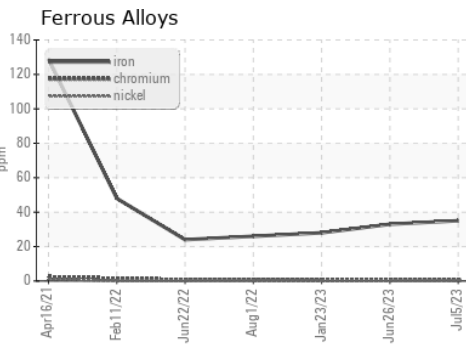

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0062203 **Received** : 10 Jul 2023  
**Lab Number** : **05893502** **Diagnosed** : 11 Jul 2023  
**Unique Number** : 10549312 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 626 - Cadillac Hauling**  
 1501 Ron Wilson St  
 Cadillac, MI  
 US 49601  
 Contact: GARY BREWER  
 gbrewerjr@gflenv.com  
 T:  
 F:

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)