




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

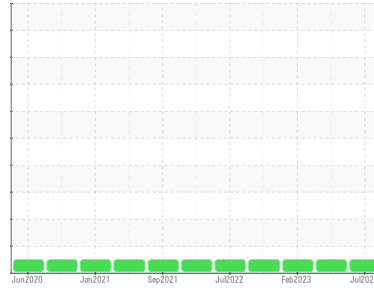

Machine Id  
**828033-1043**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (--- LTR)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history 1	history 2
Sample Number	Client Info		<b>GFL0077816</b>	GFL0077801	GFL0065079
Sample Date	Client Info		<b>03 Jul 2023</b>	11 May 2023	21 Feb 2023
Machine Age	hrs	Client Info	<b>12074</b>	11712	11171
Oil Age	hrs	Client Info	<b>0</b>	0	0
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history 1	history 2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history 1	history 2
Iron	ppm	ASTM D5185m >110	<b>7</b>	11	17
Chromium	ppm	ASTM D5185m >4	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m >2	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m	<b>0</b>	0	<1
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >25	<b>2</b>	<1	2
Lead	ppm	ASTM D5185m >45	<b>0</b>	0	<1
Copper	ppm	ASTM D5185m >85	<b>&lt;1</b>	1	1
Tin	ppm	ASTM D5185m >4	<b>&lt;1</b>	0	<1
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history 1	history 2
Boron	ppm	ASTM D5185m 0	<b>6</b>	9	12
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	<1
Molybdenum	ppm	ASTM D5185m 60	<b>61</b>	60	62
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m 1010	<b>999</b>	986	977
Calcium	ppm	ASTM D5185m 1070	<b>1109</b>	1172	1181
Phosphorus	ppm	ASTM D5185m 1150	<b>1088</b>	1050	981
Zinc	ppm	ASTM D5185m 1270	<b>1362</b>	1330	1225
Sulfur	ppm	ASTM D5185m 2060	<b>3852</b>	3637	3305

## CONTAMINANTS

	method	limit/base	current	history 1	history 2
Silicon	ppm	ASTM D5185m >30	<b>4</b>	5	5
Sodium	ppm	ASTM D5185m	<b>4</b>	4	5
Potassium	ppm	ASTM D5185m >20	<b>2</b>	1	0

## INFRA-RED



	method	limit/base	current	history 1	history 2
Soot %	%	*ASTM D7844 >3	<b>0.3</b>	0.3	0.4
Nitration	Abs/cm	*ASTM D7624 >20	<b>7.7</b>	8.6	9.6
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>20.1</b>	20.7	21.0

## FLUID DEGRADATION

	method	limit/base	current	history 1	history 2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>16.4</b>	16.4	17.1
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>7.9</b>	8.0	7.9







# OIL ANALYSIS REPORT

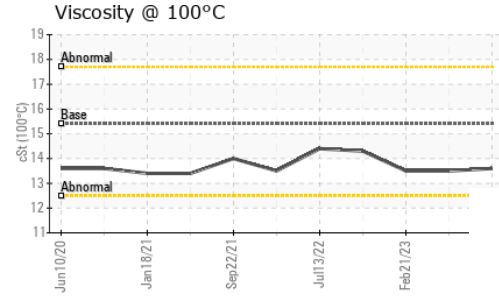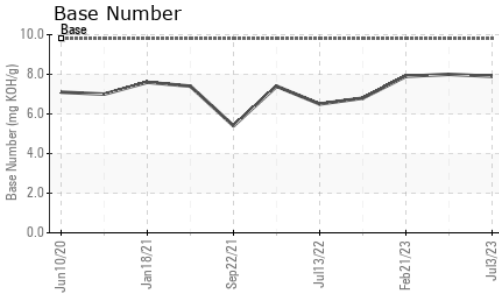

VISUAL	method	limit/base	current	history 1	history 2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history 1	history 2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.6</b>	13.5	13.5

## GRAPHS

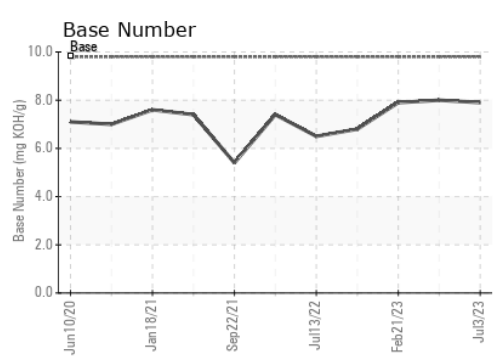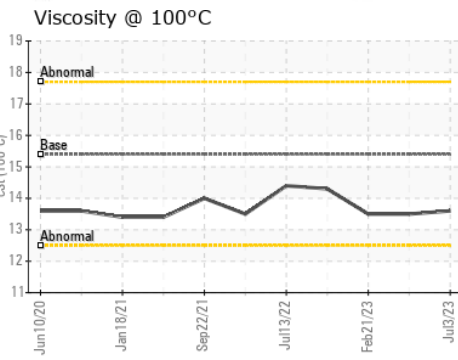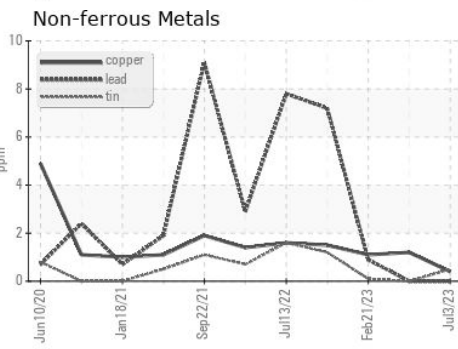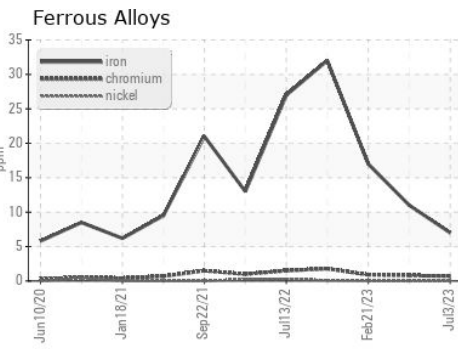

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0077816 **Received** : 10 Jul 2023  
**Lab Number** : **05894302** **Diagnosed** : 11 Jul 2023  
**Unique Number** : 10550112 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 650 - West Point Hauling**  
 7825 Parham Landing Road  
 West Point, VA  
 US 23181  
 Contact: Jason Smith  
 jasonsmith@gflenv.com  
 T:  
 F:

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)