

OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

Area (AU698W) Supermarket Machine Id FREIGHTLINER 107A1882 Component

Diesel Engine

PETRO CANADA DURON SHP 10W30 (11 GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

				Jun2023		
SAMPLE INFORM	IATION	method	limit/base	current	history 1	history 2
Sample Number		Client Info		PCA0100422		
Sample Date		Client Info		22 Jun 2023		
Machine Age	mls	Client Info		180525		
Oil Age	mls	Client Info		5825		
Oil Changed		Client Info		Changed		
Sample Status				NORMAL		
CONTAMINATI	ON	method	limit/base	current	history 1	history 2
Fuel		WC Method	>5	<1.0		
Glycol		WC Method		NEG		
WEAR METALS	S	method	limit/base	current	history 1	history 2
Iron	ppm	ASTM D5185m	>80	7		
Chromium	ppm	ASTM D5185m	>5	<1		
Nickel	ppm	ASTM D5185m	>2	<1		
Titanium	ppm	ASTM D5185m		0		
Silver	ppm	ASTM D5185m	>3	0		
Aluminum	ppm	ASTM D5185m	>30	6		
Lead	ppm	ASTM D5185m	>30	0		
Copper	ppm	ASTM D5185m	>150	4		
Tin	ppm	ASTM D5185m	>5	<1		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history 1	history 2
Boron	ppm	ASTM D5185m	2	6		
Barium	ppm	ASTM D5185m	0	0		
Molybdenum	ppm	ASTM D5185m	50	61		
Manganese	ppm	ASTM D5185m	0	<1		
Magnesium						
	ppm	ASTM D5185m	950	939		
Calcium	ppm ppm	ASTM D5185m ASTM D5185m	950 1050	939 1110		
Calcium Phosphorus						
	ppm	ASTM D5185m	1050	1110		
Phosphorus	ppm ppm	ASTM D5185m ASTM D5185m	1050 995	1110 1093		
Phosphorus Zinc	ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m	1050 995 1180	1110 1093 1332		
Phosphorus Zinc Sulfur	ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	1050 995 1180 2600	1110 1093 1332 3982		
Phosphorus Zinc Sulfur CONTAMINAN	ppm ppm ppm ppm TS	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m method	1050 995 1180 2600 limit/base	1110 1093 1332 3982 current	 history 1	 history 2
Phosphorus Zinc Sulfur CONTAMINAN ⁻ Silicon	ppm ppm ppm ppm TS	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m method ASTM D5185m	1050 995 1180 2600 limit/base >20	1110 1093 1332 3982 current 3	 history 1	 history 2
Phosphorus Zinc Sulfur CONTAMINAN ^T Silicon Sodium	ppm ppm ppm ppm TS ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	1050 995 1180 2600 limit/base >20	1110 1093 1332 3982 current 3 2	 history 1 	 history 2
Phosphorus Zinc Sulfur CONTAMINAN ^T Silicon Sodium Potassium	ppm ppm ppm ppm TS ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m method ASTM D5185m ASTM D5185m ASTM D5185m	1050 995 1180 2600 <i>limit/base</i> >20 >20	1110 1093 1332 3982 current 3 2 4	 history 1 	 history 2
Phosphorus Zinc Sulfur CONTAMINAN ^T Silicon Sodium Potassium INFRA-RED	ppm ppm ppm ppm TS ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	1050 995 1180 2600 limit/base >20 >20 limit/base >3	1110 1093 1332 3982 current 3 2 4 current	 history 1 history 1	 history 2 history 2
Phosphorus Zinc Sulfur CONTAMINAN ^T Silicon Sodium Potassium INFRA-RED Soot %	ppm ppm ppm ppm TS ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	1050 995 1180 2600 limit/base >20 >20 limit/base >3	1110 1093 1332 3982 current 3 2 4 current 0.3	 history 1 history 1 	 history 2 history 2
Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium INFRA-RED Soot % Nitration	ppm ppm ppm ppm TS ppm ppm ppm ppm ppm % Abs/.1mm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D7844 *ASTM D7844 *ASTM D7624	1050 995 1180 2600 <i>limit/base</i> >20 <i>limit/base</i> >3 >20	1110 1093 1332 3982 current 3 2 4 current 0.3 6.1	 history 1 history 1 history 1	 history 2 history 2 history 2
Phosphorus Zinc Sulfur CONTAMINAN Solicon Sodium Potassium INFRA-RED Soot % Nitration Sulfation	ppm ppm ppm ppm TS ppm ppm ppm ppm ppm % Abs/.1mm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D7844 *ASTM D7844 *ASTM D7624	1050 995 1180 2600 limit/base >20 limit/base >3 >20 >3 >20	1110 1093 1332 3982 current 3 2 4 current 0.3 6.1 18.9	 history 1 history 1 	 history 2 history 2 history 2



14

cSt (100°C) Ba

Abnorm

OIL ANALYSIS REPORT

*Visual

*Visual

*Visual

*Visual

scalar *Visual

scalar

scalar

scalar

scalar

NONE

VISUAL


White Metal


Yellow Metal

Precipitate

Silt

Debris



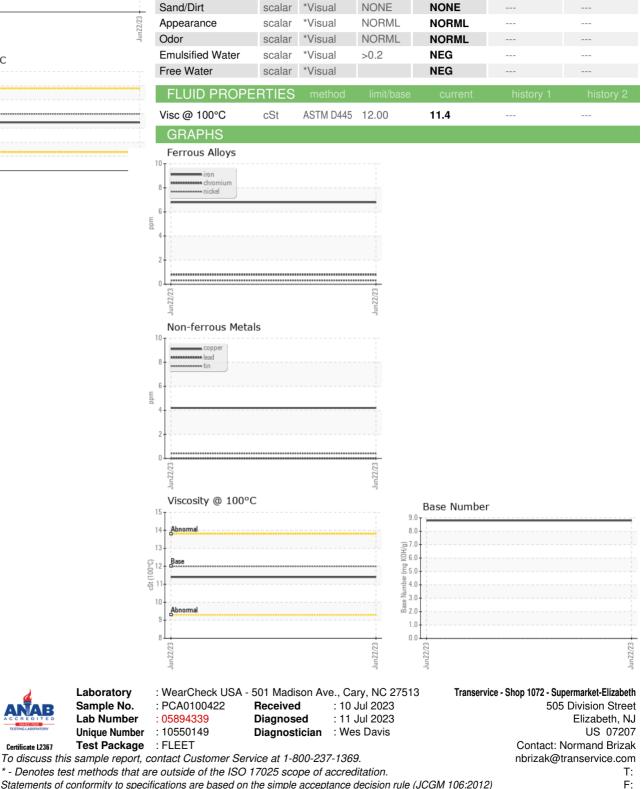

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)