




# OIL ANALYSIS REPORT

Sample Rating Trend

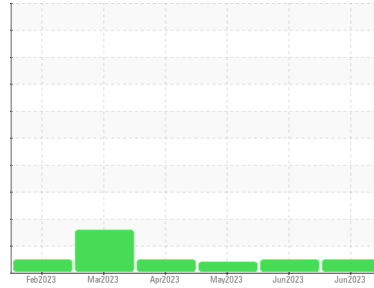

**NORMAL**



Machine Id  
**424075**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history 1	history 2
Sample Number	Client Info	<b>GFL0083147</b>	GFL0077418	GFL0083115
Sample Date	Client Info	<b>30 Jun 2023</b>	06 Jun 2023	11 May 2023
Machine Age	hrs	Client Info	<b>0</b>	0
Oil Age	hrs	Client Info	<b>0</b>	0
Oil Changed	Client Info	<b>Not Chngd</b>	N/A	Not Chngd
Sample Status		<b>NORMAL</b>	NORMAL	ATTENTION

## CONTAMINATION

method	limit/base	current	history 1	history 2
Fuel	WC Method >3.0	<b>&lt;1.0</b>	<1.0	0.3
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history 1	history 2
Iron	ppm ASTM D5185m >90	<b>12</b>	12	7
Chromium	ppm ASTM D5185m >20	<b>2</b>	1	<1
Nickel	ppm ASTM D5185m >2	<b>&lt;1</b>	<1	<1
Titanium	ppm ASTM D5185m >2	<b>0</b>	0	0
Silver	ppm ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm ASTM D5185m >20	<b>3</b>	1	4
Lead	ppm ASTM D5185m >40	<b>&lt;1</b>	<1	0
Copper	ppm ASTM D5185m >330	<b>8</b>	8	5
Tin	ppm ASTM D5185m >15	<b>&lt;1</b>	<1	1
Vanadium	ppm ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history 1	history 2
Boron	ppm ASTM D5185m 0	<b>3</b>	2	5
Barium	ppm ASTM D5185m 0	<b>0</b>	2	0
Molybdenum	ppm ASTM D5185m 60	<b>60</b>	64	62
Manganese	ppm ASTM D5185m 0	<b>&lt;1</b>	<1	<1
Magnesium	ppm ASTM D5185m 1010	<b>987</b>	906	928
Calcium	ppm ASTM D5185m 1070	<b>1117</b>	1098	1202
Phosphorus	ppm ASTM D5185m 1150	<b>1092</b>	1023	1015
Zinc	ppm ASTM D5185m 1270	<b>1344</b>	1226	1333
Sulfur	ppm ASTM D5185m 2060	<b>3988</b>	3442	4148

## CONTAMINANTS

method	limit/base	current	history 1	history 2
Silicon	ppm ASTM D5185m >25	<b>11</b>	11	8
Sodium	ppm ASTM D5185m	<b>3</b>	2	2
Potassium	ppm ASTM D5185m >20	<b>3</b>	1	<1

## INFRA-RED



method	limit/base	current	history 1	history 2
Soot %	% *ASTM D7844 >6	<b>0.3</b>	0.3	0.1
Nitration	Abs/cm *ASTM D7624 >20	<b>8.2</b>	7.4	7.0
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>19.9</b>	19.7	18.9

## FLUID DEGRADATION

method	limit/base	current	history 1	history 2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>16.7</b>	16.3	15.0
Base Number (BN)	mg KOH/g ASTM D2896 9.8	<b>8.4</b>	8.3	8.3







# OIL ANALYSIS REPORT

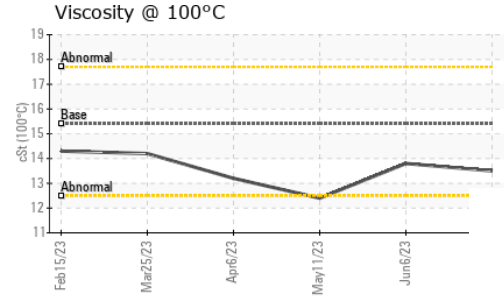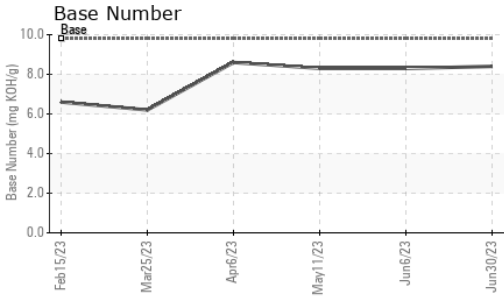

VISUAL	method	limit/base	current	history 1	history 2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history 1	history 2
Visc @ 100°C	cSt	ASTM D445	15.4	13.5	13.8 ▲ 12.4

## GRAPHS

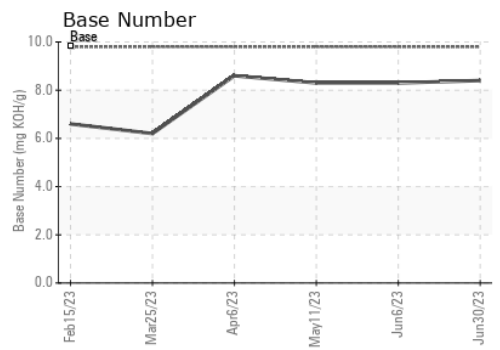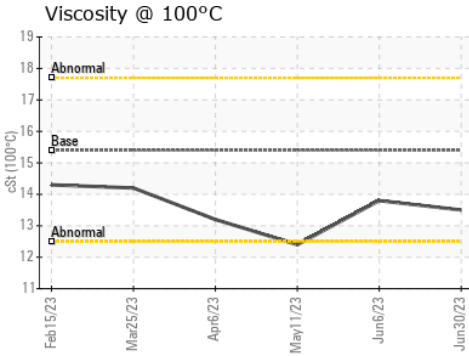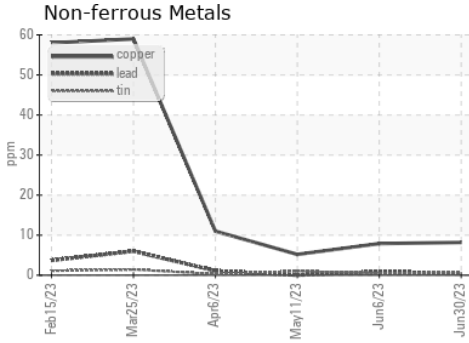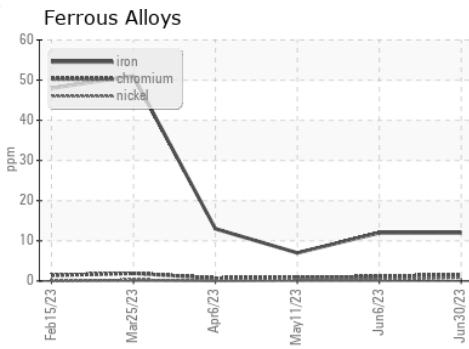

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0083147 **Received** : 10 Jul 2023  
**Lab Number** : 05894344 **Diagnosed** : 11 Jul 2023  
**Unique Number** : 10550154 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 074 - Douglas - Transwaste**  
 1219 Landfill Road  
 Douglas, GA  
 US 31533  
 Contact: CURTIS JACOBS  
 CURTIS.JACOBS@GFLENV.COM  
 T: (912)384-6001  
 F:

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)