




OIL ANALYSIS REPORT

Sample Rating Trend

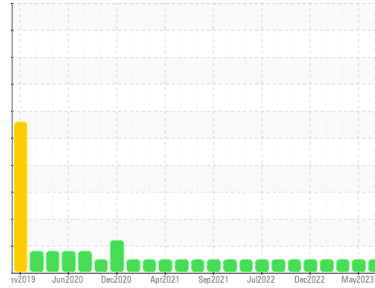

NORMAL



Machine Id
3899

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 10W30 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history 1	history 2
Sample Number	Client Info	GFL0079964	GFL0079981	GFL0074033
Sample Date	Client Info	31 May 2023	18 May 2023	26 Apr 2023
Machine Age	hrs	9229	9131	8984
Oil Age	hrs	0	7389	7389
Oil Changed	Client Info	Changed	Not Changd	Not Changd
Sample Status		NORMAL	NORMAL	NORMAL

CONTAMINATION

method	limit/base	current	history 1	history 2
Fuel	WC Method >5	<1.0	<1.0	<1.0
Glycol	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history 1	history 2
Iron	ppm ASTM D5185m >110	8	8	8
Chromium	ppm ASTM D5185m >4	<1	<1	<1
Nickel	ppm ASTM D5185m >2	<1	<1	0
Titanium	ppm ASTM D5185m	<1	<1	<1
Silver	ppm ASTM D5185m >2	0	<1	<1
Aluminum	ppm ASTM D5185m >25	2	3	4
Lead	ppm ASTM D5185m >45	<1	2	0
Copper	ppm ASTM D5185m >85	<1	1	<1
Tin	ppm ASTM D5185m >4	0	<1	0
Vanadium	ppm ASTM D5185m	<1	<1	0
Cadmium	ppm ASTM D5185m	<1	<1	0

ADDITIVES

method	limit/base	current	history 1	history 2
Boron	ppm ASTM D5185m 2	9	11	12
Barium	ppm ASTM D5185m 0	0	0	0
Molybdenum	ppm ASTM D5185m 50	56	58	60
Manganese	ppm ASTM D5185m 0	<1	<1	<1
Magnesium	ppm ASTM D5185m 950	831	828	921
Calcium	ppm ASTM D5185m 1050	1194	1151	1089
Phosphorus	ppm ASTM D5185m 995	934	960	1058
Zinc	ppm ASTM D5185m 1180	1197	1130	1319
Sulfur	ppm ASTM D5185m 2600	3510	3074	3942

CONTAMINANTS

method	limit/base	current	history 1	history 2
Silicon	ppm ASTM D5185m >30	4	5	12
Sodium	ppm ASTM D5185m	1	3	1
Potassium	ppm ASTM D5185m >20	4	1	2

INFRA-RED



method	limit/base	current	history 1	history 2
Soot %	% *ASTM D7844 >3	0.3	0.3	0.2
Nitration	Abs/cm *ASTM D7624 >20	7.4	6.7	5.8
Sulfation	Abs/.1mm *ASTM D7415 >30	19.4	19.1	16.6

FLUID DEGRADATION

method	limit/base	current	history 1	history 2
Oxidation	Abs/.1mm *ASTM D7414 >25	14.9	14.4	13.2
Base Number (BN)	mg KOH/g ASTM D2896	8.5	8.3	7.4







OIL ANALYSIS REPORT

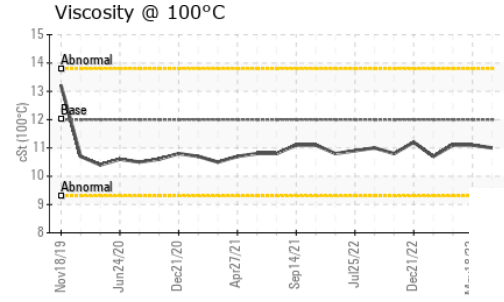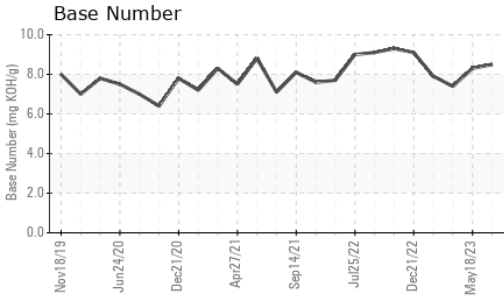

VISUAL	method	limit/base	current	history 1	history 2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	LIGHT	LIGHT
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history 1	history 2	
Visc @ 100°C	cSt	ASTM D445	12.00	11.0	11.1	11.1

GRAPHS

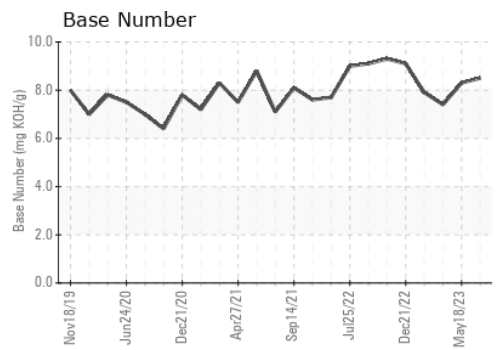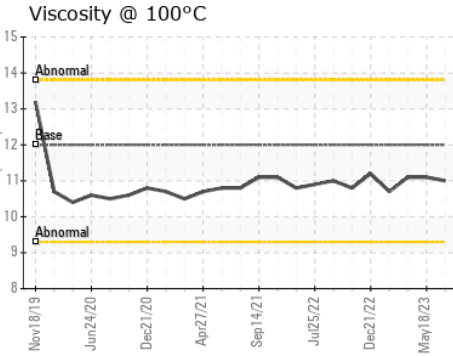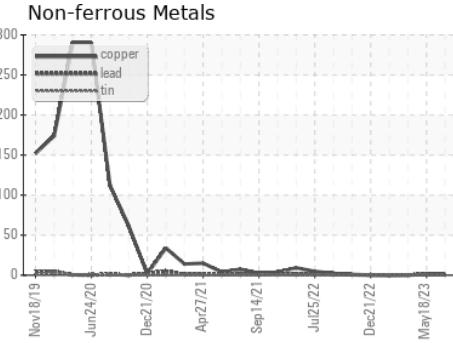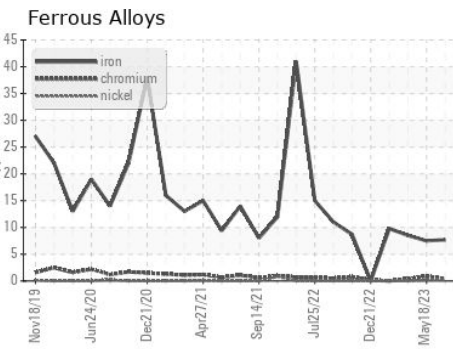

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0079964 **Received** : 11 Jul 2023
Lab Number : **05894810** **Diagnosed** : 11 Jul 2023
Unique Number : 10550620 **Diagnostician** : Wes Davis
Test Package : FLEET

GFL Environmental - 123 - Best Way Disposal
 650 Santa Fe St
 Colorado Springs, CO
 US 80903
 Contact: JASON KING
 JASON.KING@GFLENV.COM
 T: (800)207-6618
 F: (719)633-3694

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)