

Machine Id  
**TEMSA MOTOR COACH 159U**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

**DIAGNOSIS**

**Recommendation**

Resample at the next service interval to monitor.

**Wear**

All component wear rates are normal.

**Contamination**

There is no indication of any contamination in the oil.

**Fluid Condition**

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history 1	history 2
Sample Number	Client Info			<b>PCA0095372</b>	PCA0082313	PCA0047488
Sample Date	Client Info			<b>30 Jun 2023</b>	11 Oct 2022	25 Mar 2021
Machine Age	mls Client Info			<b>269121</b>	254291	218553
Oil Age	mls Client Info			<b>14830</b>	22656	8908
Oil Changed	Client Info			<b>Changed</b>	Changed	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history 1	history 2
Fuel	WC Method		>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method			<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history 1	history 2
Iron	ppm	ASTM D5185m	>90	<b>79</b>	50	40
Chromium	ppm	ASTM D5185m	>20	<b>7</b>	2	2
Nickel	ppm	ASTM D5185m	>2	<b>&lt;1</b>	0	<1
Titanium	ppm	ASTM D5185m	>2	<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m	>2	<b>0</b>	2	0
Aluminum	ppm	ASTM D5185m	>20	<b>13</b>	7	7
Lead	ppm	ASTM D5185m	>40	<b>0</b>	<1	<1
Copper	ppm	ASTM D5185m	>330	<b>3</b>	3	3
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	<1	<1
Antimony	ppm	ASTM D5185m		<b>---</b>	---	<1
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0



ADDITIVES		method	limit/base	current	history 1	history 2
Boron	ppm	ASTM D5185m	0	<b>2</b>	5	6
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	60	<b>66</b>	67	66
Manganese	ppm	ASTM D5185m	0	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	1010	<b>961</b>	931	1034
Calcium	ppm	ASTM D5185m	1070	<b>1124</b>	1160	1183
Phosphorus	ppm	ASTM D5185m	1150	<b>1045</b>	1040	1186
Zinc	ppm	ASTM D5185m	1270	<b>1312</b>	1291	1427
Sulfur	ppm	ASTM D5185m	2060	<b>3397</b>	3346	2561

CONTAMINANTS		method	limit/base	current	history 1	history 2
Silicon	ppm	ASTM D5185m	>25	<b>10</b>	4	5
Sodium	ppm	ASTM D5185m		<b>9</b>	4	6
Potassium	ppm	ASTM D5185m	>20	<b>5</b>	5	6

INFRA-RED		method	limit/base	current	history 1	history 2
Soot %	%	*ASTM D7844	>6	<b>0.9</b>	1.1	0.6
Nitration	Abs/cm	*ASTM D7624	>20	<b>11.4</b>	13.3	11.2
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>22.1</b>	25.0	21.3

FLUID DEGRADATION		method	limit/base	current	history 1	history 2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>19.6</b>	21.1	18
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	<b>10.19</b>	11.4	9.66









# OIL ANALYSIS REPORT

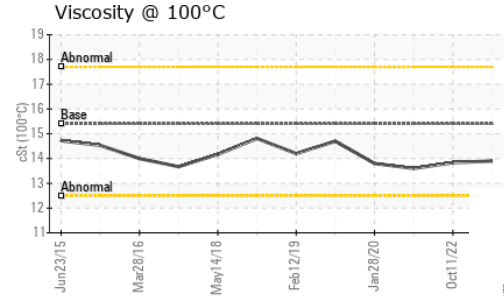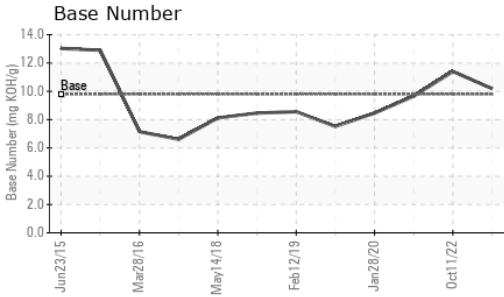

VISUAL	method	limit/base	current	history 1	history 2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history 1	history 2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.9</b>	13.83	13.6

## GRAPHS

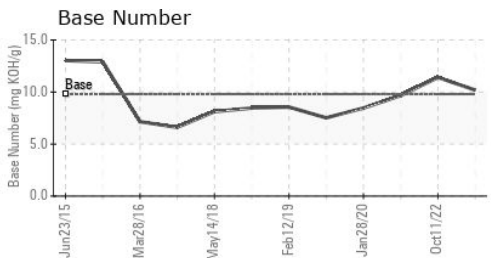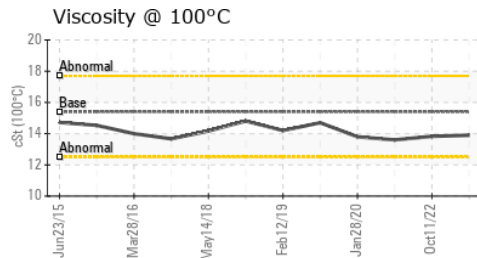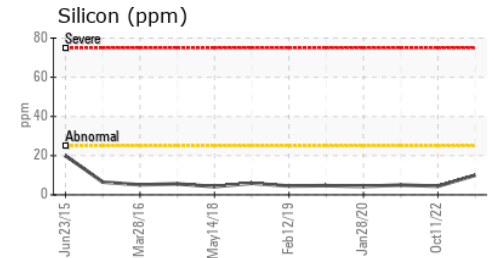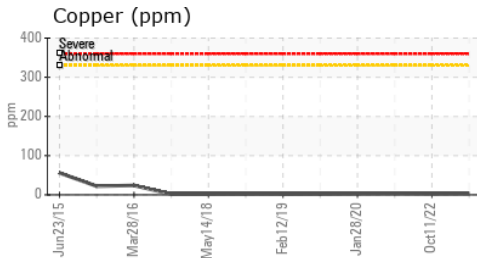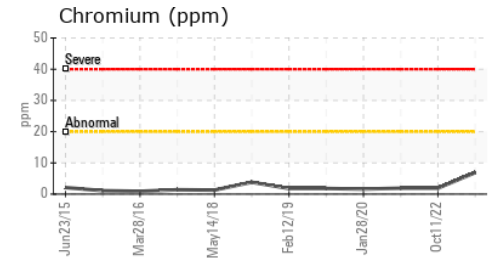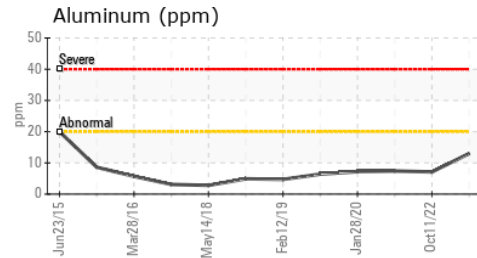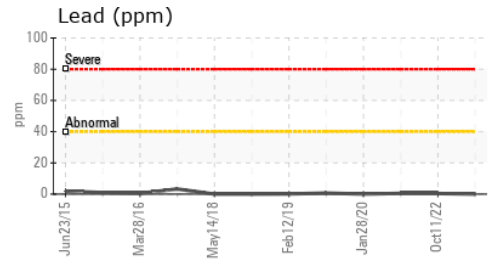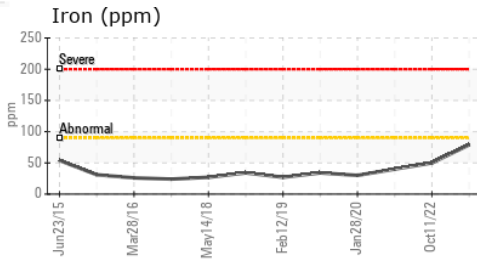

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0095372 **Received** : 11 Jul 2023  
**Lab Number** : 05895212 **Diagnosed** : 12 Jul 2023  
**Unique Number** : 10551022 **Diagnostician** : Wes Davis  
**Test Package** : MOB 2

**BROWN BUS COMPANY - UPSTATE TRANSIT**  
 50 VENNERS ROAD  
 AMSTERDAM, NY  
 US 12010  
 Contact: CONNIE WILBUR  
 cwilbur@browncoach.com  
 T: (518)843-4700  
 F: (518)843-3600

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)