


# OIL ANALYSIS REPORT

Sample Rating Trend



**NORMAL**

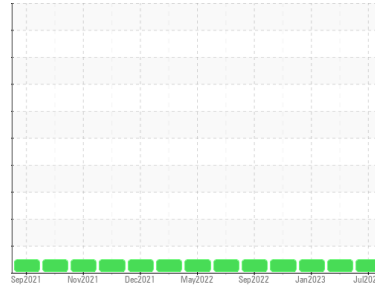

Area  
**{UNASSIGNED}**  
 Machine Id  
**2220630 (S/N U130239A)**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON ADVANCED 10W30 (9 QTS)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0102025</b>	PCA0100099	PCA0081799
Sample Date	Client Info		<b>06 Jul 2023</b>	06 Jun 2023	19 Jan 2023
Machine Age	hrs	Client Info	<b>3470</b>	2017	2017
Oil Age	hrs	Client Info	<b>150</b>	2017	2017
Oil Changed	Client Info		<b>Changed</b>	N/A	N/A
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>7</b>	4	4
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m >4	<b>&lt;1</b>	0	<1
Titanium	ppm	ASTM D5185m	<b>0</b>	0	0
Silver	ppm	ASTM D5185m >3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >20	<b>6</b>	<1	<1
Lead	ppm	ASTM D5185m >40	<b>5</b>	<1	<1
Copper	ppm	ASTM D5185m >330	<b>6</b>	1	<1
Tin	ppm	ASTM D5185m >15	<b>2</b>	0	<1
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>5</b>	2	12
Barium	ppm	ASTM D5185m 0	<b>0</b>	2	4
Molybdenum	ppm	ASTM D5185m 60	<b>58</b>	61	60
Manganese	ppm	ASTM D5185m 0	<b>2</b>	0	<1
Magnesium	ppm	ASTM D5185m 1010	<b>1067</b>	889	828
Calcium	ppm	ASTM D5185m 1070	<b>1119</b>	1070	1002
Phosphorus	ppm	ASTM D5185m 1150	<b>1181</b>	1046	917
Zinc	ppm	ASTM D5185m 1270	<b>1447</b>	1196	1135
Sulfur	ppm	ASTM D5185m 2060	<b>4206</b>	3060	3232

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>5</b>	3	3
Sodium	ppm	ASTM D5185m	<b>1</b>	0	<1
Potassium	ppm	ASTM D5185m >20	<b>8</b>	1	<1

## INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.3</b>	0.2	0.1
Nitration	Abs/cm	*ASTM D7624 >20	<b>5.7</b>	5.5	5.4
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>18.2</b>	17.7	17.0

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>14.6</b>	13.2	12.7
Base Number (BN)	mg KOH/g	ASTM D2896 10.0	<b>8.9</b>	9.4	9.0







# OIL ANALYSIS REPORT

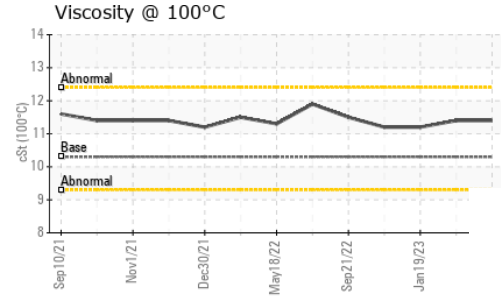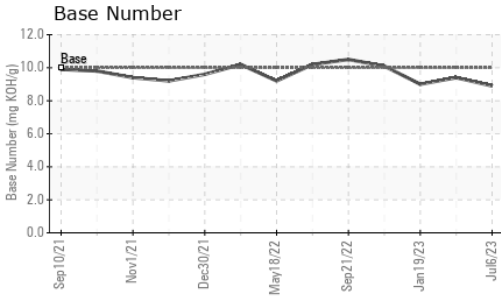

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	10.3	11.4	11.2

## GRAPHS

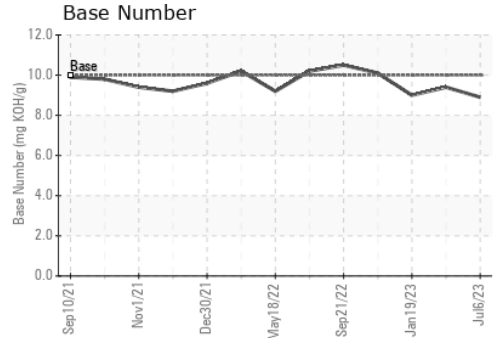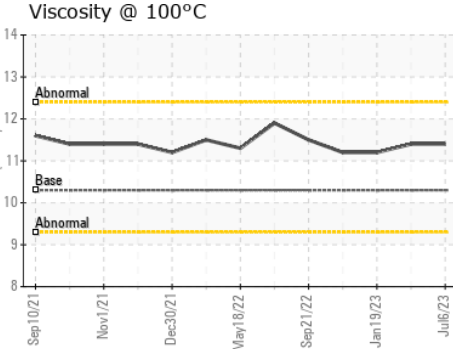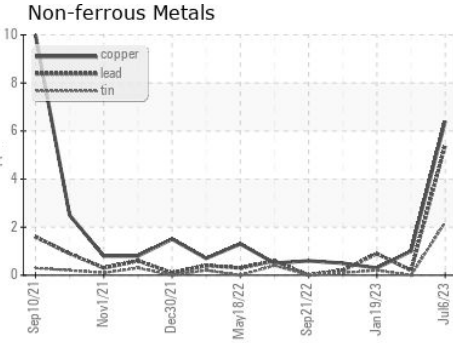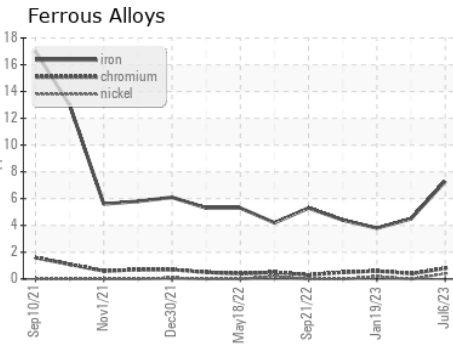

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
 Sample No. : PCA0102025 Received : 12 Jul 2023  
 Lab Number : 05895929 Diagnosed : 12 Jul 2023  
 Unique Number : 10551739 Diagnostician : Wes Davis  
 Test Package : FLEET

**PERDUE FARMS - DILLON**  
 2047 HWY 9 WEST  
 DILLON, SC  
 US 29536  
 Contact: KEVIN HOOKS  
 kevin.hooks@perdue.com  
 T: (843)841-8069  
 F: (843)841-8070

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)