


OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

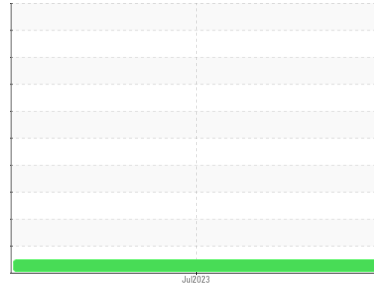

Area
FLEET
Machine Id
VOLVO 2026819
Component
Rear Rear Differential
Fluid
GEAR OIL SAE 75W90 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		PCA0102026	---	---
Sample Date	Client Info		06 Jul 2023	---	---
Machine Age	mls	Client Info	308143	---	---
Oil Age	mls	Client Info	308143	---	---
Oil Changed	Client Info		Not Chngd	---	---
Sample Status			NORMAL	---	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >500	216	---	---
Chromium	ppm	ASTM D5185m >10	2	---	---
Nickel	ppm	ASTM D5185m >10	5	---	---
Titanium	ppm	ASTM D5185m	0	---	---
Silver	ppm	ASTM D5185m	0	---	---
Aluminum	ppm	ASTM D5185m >25	3	---	---
Lead	ppm	ASTM D5185m >25	0	---	---
Copper	ppm	ASTM D5185m >100	0	---	---
Tin	ppm	ASTM D5185m >10	0	---	---
Vanadium	ppm	ASTM D5185m	0	---	---
Cadmium	ppm	ASTM D5185m	0	---	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 400	236	---	---
Barium	ppm	ASTM D5185m 200	0	---	---
Molybdenum	ppm	ASTM D5185m 12	0	---	---
Manganese	ppm	ASTM D5185m	12	---	---
Magnesium	ppm	ASTM D5185m 12	0	---	---
Calcium	ppm	ASTM D5185m 150	88	---	---
Phosphorus	ppm	ASTM D5185m 1650	1224	---	---
Zinc	ppm	ASTM D5185m 125	13	---	---
Sulfur	ppm	ASTM D5185m 22500	24301	---	---

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >75	44	---	---
Sodium	ppm	ASTM D5185m	7	---	---
Potassium	ppm	ASTM D5185m >20	50	---	---

VISUAL


	method	limit/base	current	history1	history2
White Metal	scalar	*Visual NONE	NONE	---	---
Yellow Metal	scalar	*Visual NONE	NONE	---	---
Precipitate	scalar	*Visual NONE	NONE	---	---
Silt	scalar	*Visual NONE	NONE	---	---
Debris	scalar	*Visual NONE	NONE	---	---
Sand/Dirt	scalar	*Visual NONE	NONE	---	---
Appearance	scalar	*Visual NORML	NORML	---	---
Odor	scalar	*Visual NORML	NORML	---	---
Emulsified Water	scalar	*Visual >.2	NEG	---	---
Free Water	scalar	*Visual	NEG	---	---

FLUID PROPERTIES

	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 109	98.8	---	---






OIL ANALYSIS REPORT

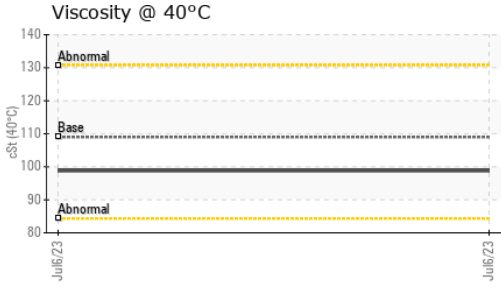

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color			no image	no image	no image
Bottom			no image	no image	no image

GRAPHS

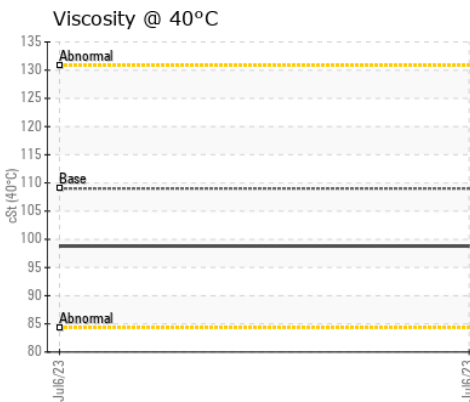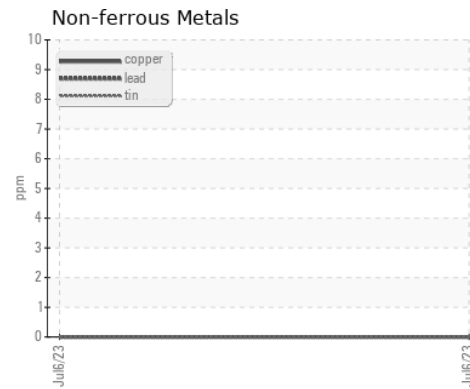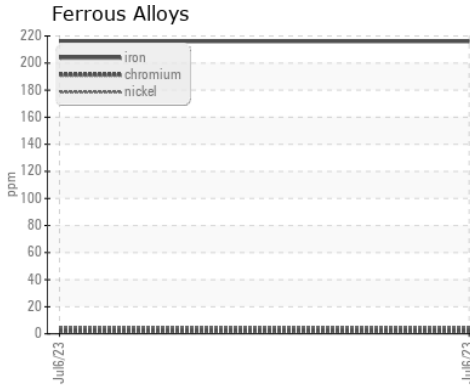

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0102026 **Received** : 12 Jul 2023
Lab Number : 05896477 **Diagnosed** : 13 Jul 2023
Unique Number : 10552287 **Diagnostician** : Don Baldrige
Test Package : FLEET

PERDUE FARMS - DILLON
 2047 HWY 9 WEST
 DILLON, SC
 US 29536
 Contact: KEVIN HOOKS
 kevin.hooks@perdue.com
 T: (843)841-8069
 F: (843)841-8070

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)