




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

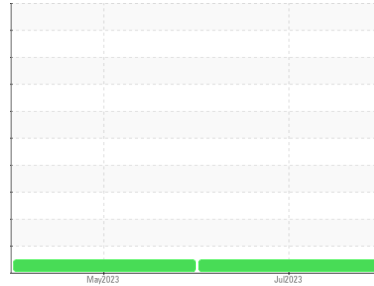

Machine Id
420092
 Component
1 Differential
 Fluid
GEAR OIL SAE 80W90 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. (Customer Sample Comment: 1st Axle / Pusher)

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

Confirm oil type. The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0085411	GFL0085422	---
Sample Date	Client Info		07 Jul 2023	31 May 2023	---
Machine Age	mls	Client Info	116311	113646	---
Oil Age	mls	Client Info	116311	105020	---
Oil Changed	Client Info		Changed	Changed	---
Sample Status			NORMAL	NORMAL	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >870	101	340	---
Chromium	ppm	ASTM D5185m >8	<1	3	---
Nickel	ppm	ASTM D5185m >25	7	23	---
Titanium	ppm	ASTM D5185m >4	0	<1	---
Silver	ppm	ASTM D5185m	0	0	---
Aluminum	ppm	ASTM D5185m >40	2	17	---
Lead	ppm	ASTM D5185m >25	0	0	---
Copper	ppm	ASTM D5185m >60	<1	<1	---
Tin	ppm	ASTM D5185m >5	0	0	---
Vanadium	ppm	ASTM D5185m	0	0	---
Cadmium	ppm	ASTM D5185m	0	0	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 400	147	154	---
Barium	ppm	ASTM D5185m 200	0	1	---
Molybdenum	ppm	ASTM D5185m 12	0	<1	---
Manganese	ppm	ASTM D5185m	2	7	---
Magnesium	ppm	ASTM D5185m 12	0	2	---
Calcium	ppm	ASTM D5185m 150	20	25	---
Phosphorus	ppm	ASTM D5185m 1650	964	1008	---
Zinc	ppm	ASTM D5185m 125	8	20	---
Sulfur	ppm	ASTM D5185m 22500	21942	23355	---

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >285	95	166	---
Sodium	ppm	ASTM D5185m >170	4	5	---
Potassium	ppm	ASTM D5185m >20	0	3	---

VISUAL


	method	limit/base	current	history1	history2
White Metal	scalar	*Visual NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual NONE	NONE	NONE	---
Precipitate	scalar	*Visual NONE	NONE	NONE	---
Silt	scalar	*Visual NONE	NONE	NONE	---
Debris	scalar	*Visual NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual NONE	NONE	NONE	---
Appearance	scalar	*Visual NORML	NORML	NORML	---
Odor	scalar	*Visual NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual >.2	NEG	NEG	---
Free Water	scalar	*Visual	NEG	NEG	---

FLUID PROPERTIES

	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 143	131	134	---






OIL ANALYSIS REPORT

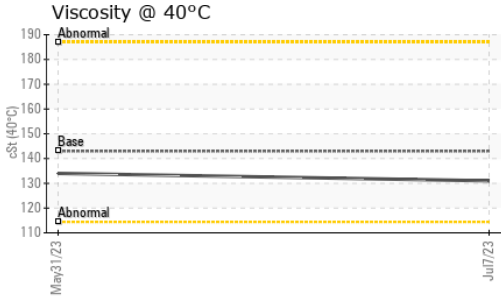

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color			no image	no image	no image
Bottom			no image	no image	no image

GRAPHS

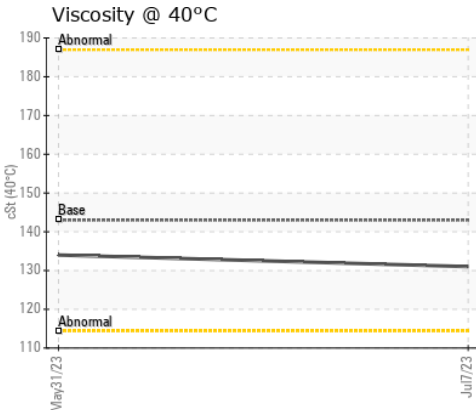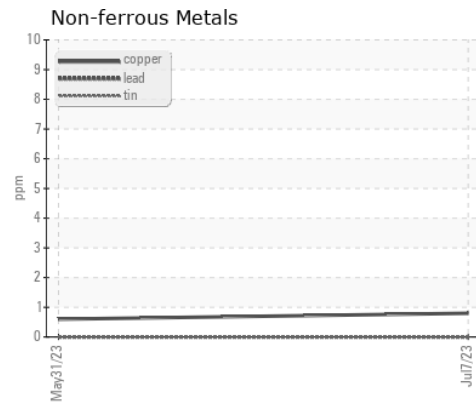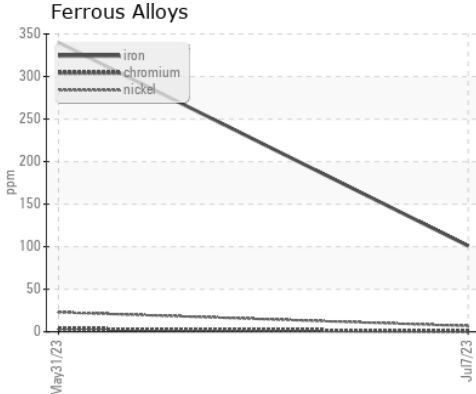

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0085411 **Received** : 12 Jul 2023
Lab Number : 05896541 **Diagnosed** : 13 Jul 2023
Unique Number : 10552351 **Diagnostician** : Don Baldrige
Test Package : FLEET

GFL Environmental - 983 - Sugar Land Hauling
 16011 West Belfort Street
 Sugar Land, TX
 US 77498
 Contact: TECHNICIAN ACCOUNT
 wcgfldemo@gmail.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: