


OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

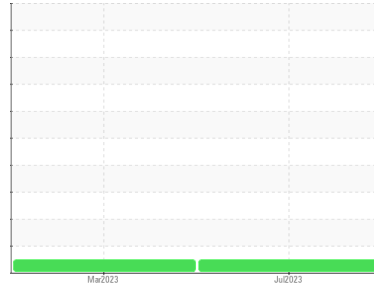

Area
(89841X) Walgreens
Machine Id
[Walgreens] 136A68100
Component
Diesel Engine
Fluid
PETRO CANADA DURON SHP 10W30 (11 GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

| SAMPLE INFORMATION | | method | limit/base | current | history1 | history2 |
|--------------------|-----------------|--------|------------|--------------------|-------------|----------|
| Sample Number | Client Info | | | PCA0094411 | PCA0092030 | --- |
| Sample Date | Client Info | | | 06 Jul 2023 | 07 Mar 2023 | --- |
| Machine Age | mls Client Info | | | 522734 | 500812 | --- |
| Oil Age | mls Client Info | | | 522734 | 500812 | --- |
| Oil Changed | Client Info | | | Changed | Not Changd | --- |
| Sample Status | | | | NORMAL | NORMAL | --- |

| CONTAMINATION | | method | limit/base | current | history1 | history2 |
|---------------|-----------|--------|------------|----------------|----------|----------|
| Fuel | WC Method | >5 | | <1.0 | <1.0 | --- |
| Glycol | WC Method | | | NEG | NEG | --- |

| WEAR METALS | | method | limit/base | current | history1 | history2 |
|-------------|-----|-------------|------------|--------------|----------|----------|
| Iron | ppm | ASTM D5185m | >80 | 23 | 11 | --- |
| Chromium | ppm | ASTM D5185m | >5 | 2 | <1 | --- |
| Nickel | ppm | ASTM D5185m | >2 | <1 | 0 | --- |
| Titanium | ppm | ASTM D5185m | | 0 | 0 | --- |
| Silver | ppm | ASTM D5185m | >3 | 0 | 0 | --- |
| Aluminum | ppm | ASTM D5185m | >30 | 14 | 8 | --- |
| Lead | ppm | ASTM D5185m | >30 | 0 | 0 | --- |
| Copper | ppm | ASTM D5185m | >150 | 4 | 1 | --- |
| Tin | ppm | ASTM D5185m | >5 | <1 | 0 | --- |
| Vanadium | ppm | ASTM D5185m | | 0 | 0 | --- |
| Cadmium | ppm | ASTM D5185m | | 0 | 0 | --- |



| ADDITIVES | | method | limit/base | current | history1 | history2 |
|------------|-----|-------------|------------|--------------|----------|----------|
| Boron | ppm | ASTM D5185m | 2 | 0 | <1 | --- |
| Barium | ppm | ASTM D5185m | 0 | 0 | 0 | --- |
| Molybdenum | ppm | ASTM D5185m | 50 | 62 | 57 | --- |
| Manganese | ppm | ASTM D5185m | 0 | <1 | <1 | --- |
| Magnesium | ppm | ASTM D5185m | 950 | 917 | 912 | --- |
| Calcium | ppm | ASTM D5185m | 1050 | 1147 | 1107 | --- |
| Phosphorus | ppm | ASTM D5185m | 995 | 1022 | 946 | --- |
| Zinc | ppm | ASTM D5185m | 1180 | 1252 | 1208 | --- |
| Sulfur | ppm | ASTM D5185m | 2600 | 2890 | 3090 | --- |

| CONTAMINANTS | | method | limit/base | current | history1 | history2 |
|--------------|-----|-------------|------------|----------|----------|----------|
| Silicon | ppm | ASTM D5185m | >20 | 4 | 4 | --- |
| Sodium | ppm | ASTM D5185m | | 0 | 2 | --- |
| Potassium | ppm | ASTM D5185m | >20 | 6 | <1 | --- |

| INFRA-RED | | method | limit/base | current | history1 | history2 |
|-----------|----------|-------------|------------|-------------|----------|----------|
| Soot % | % | *ASTM D7844 | >3 | 1.2 | 0.7 | --- |
| Nitration | Abs/cm | *ASTM D7624 | >20 | 10.0 | 8.2 | --- |
| Sulfation | Abs/.1mm | *ASTM D7415 | >30 | 22.9 | 19.4 | --- |

| FLUID DEGRADATION | | method | limit/base | current | history1 | history2 |
|-------------------|----------|-------------|------------|-------------|----------|----------|
| Oxidation | Abs/.1mm | *ASTM D7414 | >25 | 17.7 | 14.9 | --- |
| Base Number (BN) | mg KOH/g | ASTM D2896 | | 7.1 | 8.5 | --- |





OIL ANALYSIS REPORT

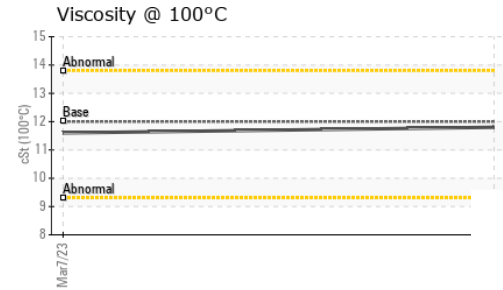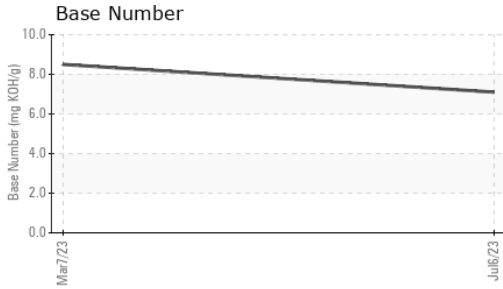

| VISUAL | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal | scalar | *Visual | NONE | NONE | --- |
| Yellow Metal | scalar | *Visual | NONE | NONE | --- |
| Precipitate | scalar | *Visual | NONE | NONE | --- |
| Silt | scalar | *Visual | NONE | NONE | --- |
| Debris | scalar | *Visual | NONE | NONE | --- |
| Sand/Dirt | scalar | *Visual | NONE | NONE | --- |
| Appearance | scalar | *Visual | NORML | NORML | --- |
| Odor | scalar | *Visual | NORML | NORML | --- |
| Emulsified Water | scalar | *Visual | >0.2 | NEG | --- |
| Free Water | scalar | *Visual | | NEG | --- |

| FLUID PROPERTIES | method | limit/base | current | history1 | history2 | |
|------------------|--------|------------|---------|-------------|----------|-----|
| Visc @ 100°C | cSt | ASTM D445 | 12.00 | 11.8 | 11.6 | --- |

GRAPHS

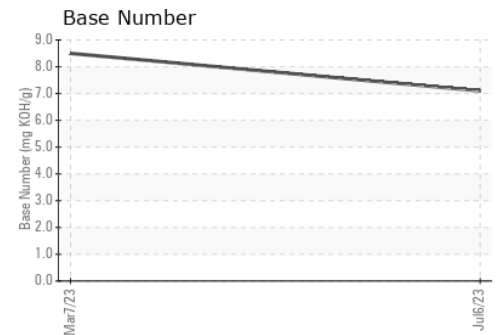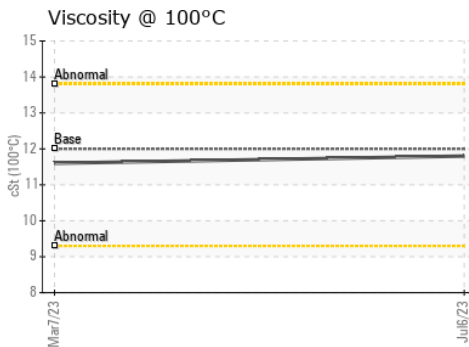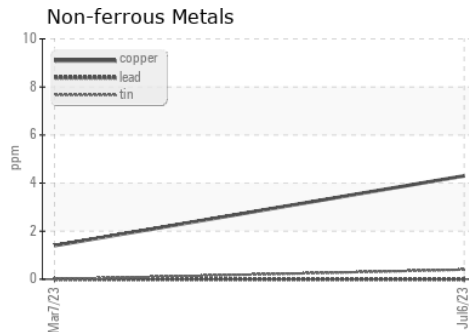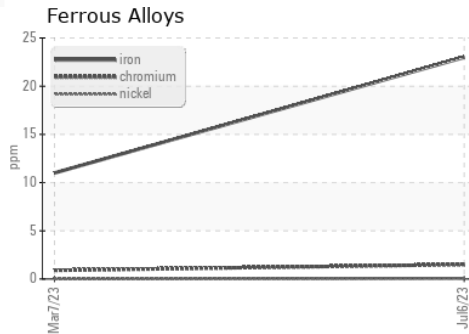

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0094411 **Received** : 12 Jul 2023
Lab Number : **05896769** **Diagnosed** : 13 Jul 2023
Unique Number : 10552579 **Diagnostician** : Wes Davis
Test Package : FLEET

Transervice - Shop 1367 - Berkeley-Jupiter
 15998 Walgreens Drive
 Jupiter, FL
 US 33478

Contact: Manny Gonzalez
 egonzalez@transervice.com
 T: (561)776-0755
 F: (561)776-0799

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)