




# OIL ANALYSIS REPORT

Sample Rating Trend

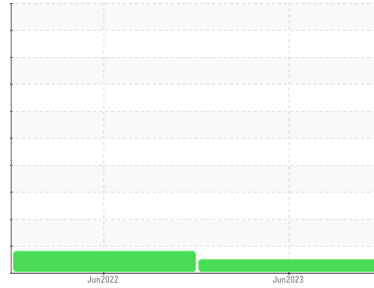

**NORMAL**



Machine Id  
**830M**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0084886</b>	GFL0052146	---
Sample Date	Client Info	<b>16 Jun 2023</b>	08 Jun 2022	---
Machine Age	hrs	Client Info	<b>0</b>	4729
Oil Age	hrs	Client Info	<b>0</b>	4729
Oil Changed	Client Info	<b>Changed</b>	N/A	---
Sample Status		<b>NORMAL</b>	ABNORMAL	---

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<b>&lt;1.0</b>	<1.0	---
Glycol	WC Method	<b>NEG</b>	NEG	---

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >100	<b>70</b>	▲ 147	---
Chromium	ppm ASTM D5185m >20	<b>2</b>	5	---
Nickel	ppm ASTM D5185m >2	<b>&lt;1</b>	2	---
Titanium	ppm ASTM D5185m >2	<b>&lt;1</b>	<1	---
Silver	ppm ASTM D5185m >2	<b>0</b>	0	---
Aluminum	ppm ASTM D5185m >25	<b>5</b>	10	---
Lead	ppm ASTM D5185m >40	<b>&lt;1</b>	<1	---
Copper	ppm ASTM D5185m >330	<b>5</b>	10	---
Tin	ppm ASTM D5185m >15	<b>0</b>	<1	---
Vanadium	ppm ASTM D5185m	<b>&lt;1</b>	0	---
Cadmium	ppm ASTM D5185m	<b>0</b>	0	---

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	<b>&lt;1</b>	4	---
Barium	ppm ASTM D5185m 0	<b>0</b>	0	---
Molybdenum	ppm ASTM D5185m 60	<b>56</b>	73	---
Manganese	ppm ASTM D5185m 0	<b>&lt;1</b>	1	---
Magnesium	ppm ASTM D5185m 1010	<b>902</b>	1122	---
Calcium	ppm ASTM D5185m 1070	<b>1039</b>	1348	---
Phosphorus	ppm ASTM D5185m 1150	<b>941</b>	1169	---
Zinc	ppm ASTM D5185m 1270	<b>1170</b>	1515	---
Sulfur	ppm ASTM D5185m 2060	<b>2871</b>	2606	---

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	<b>17</b>	16	---
Sodium	ppm ASTM D5185m	<b>3</b>	7	---
Potassium	ppm ASTM D5185m >20	<b>4</b>	0	---

## INFRA-RED



method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	<b>0.7</b>	1.2	---
Nitration	Abs/cm *ASTM D7624 >20	<b>16.6</b>	18.4	---
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>27.8</b>	29.6	---

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>31.6</b>	31.8	---
Base Number (BN)	mg KOH/g ASTM D2896 9.8	<b>5.1</b>	7.6	---








# OIL ANALYSIS REPORT

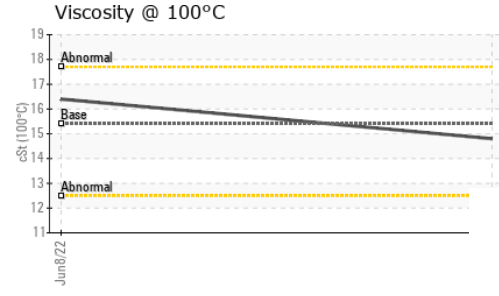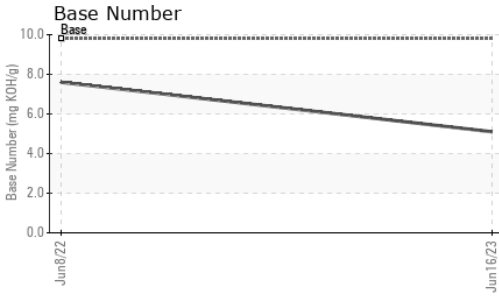

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>14.8</b>	16.4	---

## GRAPHS

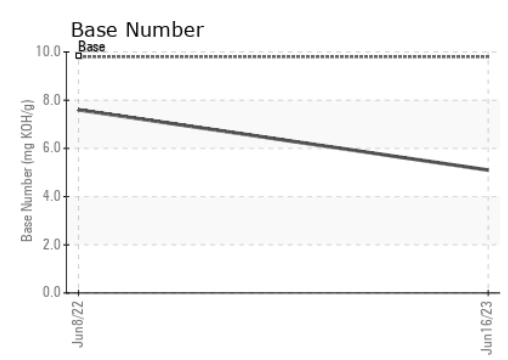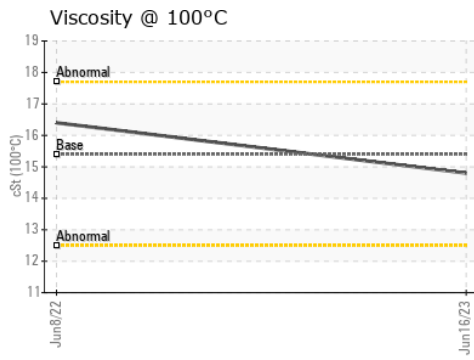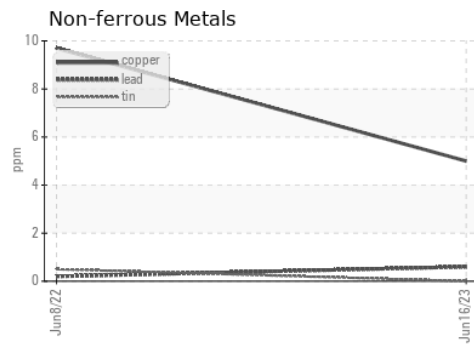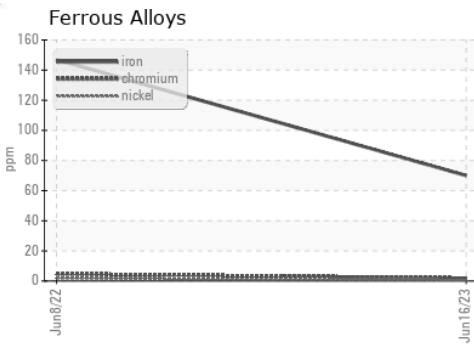

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0084886 **Received** : 13 Jul 2023  
**Lab Number** : **05897181** **Diagnosed** : 14 Jul 2023  
**Unique Number** : 10552991 **Diagnostician** : Sean Felton  
**Test Package** : FLEET

**GFL Environmental - 410 - Michigan West**  
 39000 Van Born Rd  
 Wayne, MI  
 US 48184  
 Contact: Belal Dgheish  
 bdgheish@gflenv.com  
 T: (734)714-2340  
 F:

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)