

PROBLEM SUMMARY

Sample Rating Trend





FUEL



Machine Id
FREIGHTLINER 44
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 15W40 (13 LTR)

COMPONENT CONDITION SUMMARY

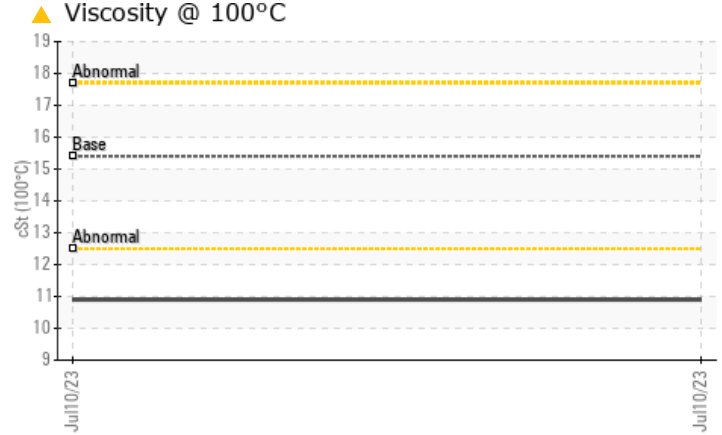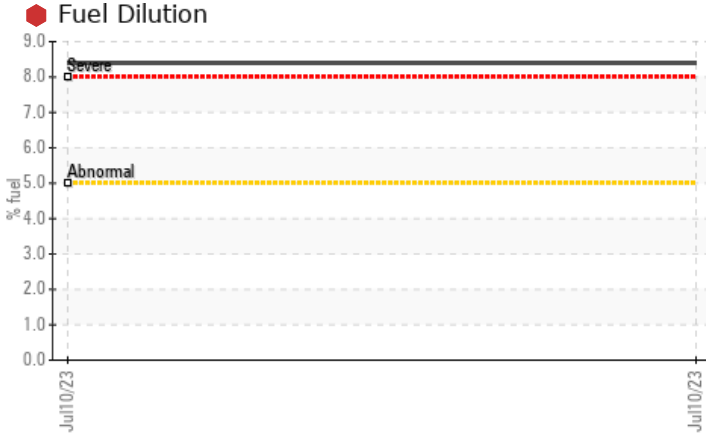

RECOMMENDATION

We advise that you check the fuel injection system. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

PROBLEMATIC TEST RESULTS

Sample Status				SEVERE	---	---
Fuel	%	ASTM D3524	>5	8.4	---	---
Visc @ 100°C	cSt	ASTM D445	15.4	10.9	---	---

Customer Id: ATRPIN
 Sample No.: PCA0100620
 Lab Number: 05897874
 Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Don Baldrige +1
don.b505@comcast.net

To change component or sample information:
 Customer Service +1 1-800-237-1369
customerservice@wearcheck.com


RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Fluid	---	---	?	Oil and filter change at the time of sampling has been noted.
Change Filter	---	---	?	Oil and filter change at the time of sampling has been noted.
Resample	---	---	?	We recommend an early resample to monitor this condition.
Check Fuel/injector System	---	---	?	We advise that you check the fuel injection system.

HISTORICAL DIAGNOSIS



Machine Id
FREIGHTLINER 44
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 15W40 (13 LTR)

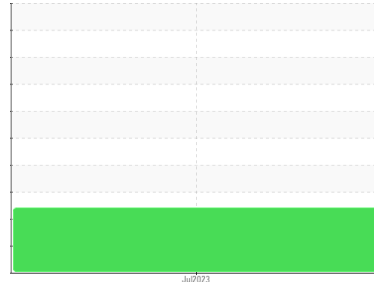

DIAGNOSIS

Recommendation
 We advise that you check the fuel injection system. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

Wear
 All component wear rates are normal.

Contamination
 There is a high amount of fuel present in the oil.

Fluid Condition
 Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	PCA0100620	---	---
Sample Date	Client Info	10 Jul 2023	---	---
Machine Age	mls Client Info	368023	---	---
Oil Age	mls Client Info	26752	---	---
Oil Changed	Client Info	Changed	---	---
Sample Status		SEVERE	---	---

CONTAMINATION

method	limit/base	current	history1	history2
Glycol	WC Method	NEG	---	---

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >80	34	---	---
Chromium	ppm ASTM D5185m >5	1	---	---
Nickel	ppm ASTM D5185m >2	0	---	---
Titanium	ppm ASTM D5185m	0	---	---
Silver	ppm ASTM D5185m >3	0	---	---
Aluminum	ppm ASTM D5185m >30	3	---	---
Lead	ppm ASTM D5185m >30	20	---	---
Copper	ppm ASTM D5185m >150	2	---	---
Tin	ppm ASTM D5185m >5	2	---	---
Vanadium	ppm ASTM D5185m	0	---	---
Cadmium	ppm ASTM D5185m	0	---	---

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	1	---	---
Barium	ppm ASTM D5185m 0	0	---	---
Molybdenum	ppm ASTM D5185m 60	57	---	---
Manganese	ppm ASTM D5185m 0	<1	---	---
Magnesium	ppm ASTM D5185m 1010	790	---	---
Calcium	ppm ASTM D5185m 1070	983	---	---
Phosphorus	ppm ASTM D5185m 1150	854	---	---
Zinc	ppm ASTM D5185m 1270	1047	---	---
Sulfur	ppm ASTM D5185m 2060	2958	---	---

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >20	3	---	---
Sodium	ppm ASTM D5185m	0	---	---
Potassium	ppm ASTM D5185m >20	4	---	---
Fuel	% ASTM D3524 >5	8.4	---	---




INFRA-RED

method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	2.1	---	---
Nitration	Abs/cm *ASTM D7624 >20	10.3	---	---
Sulfation	Abs/.1mm *ASTM D7415 >30	27.0	---	---

FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	25.0	---	---
Base Number (BN)	mg KOH/g ASTM D2896 9.8	4.8	---	---





OIL ANALYSIS REPORT

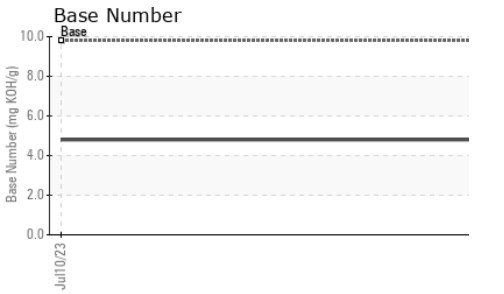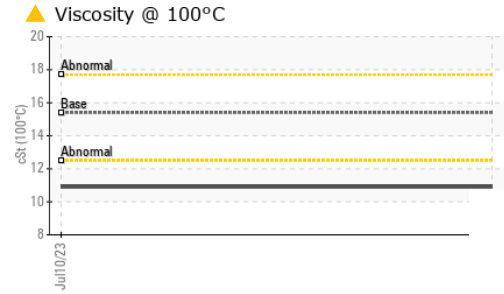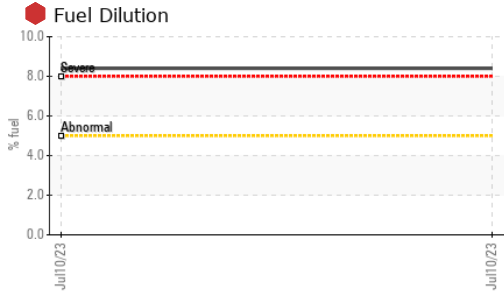

VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---
Precipitate	scalar	*Visual	NONE	NONE	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---
Free Water	scalar	*Visual		NEG	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4 ▲ 10.9	---	---

GRAPHS

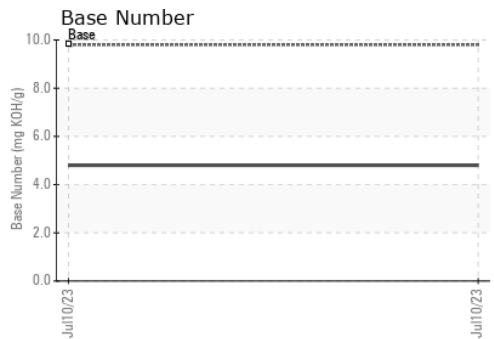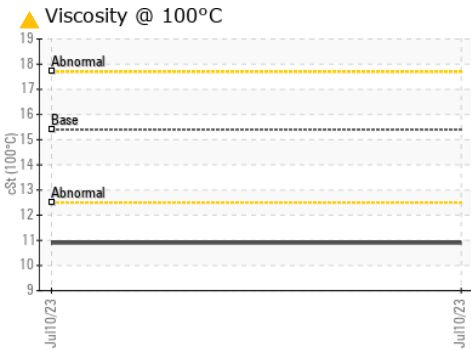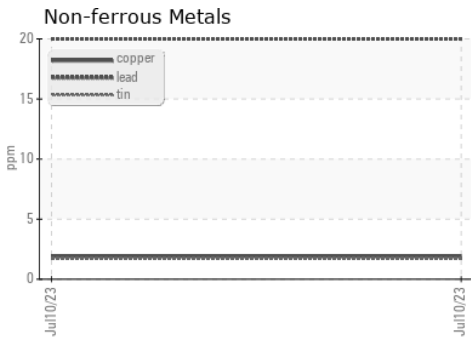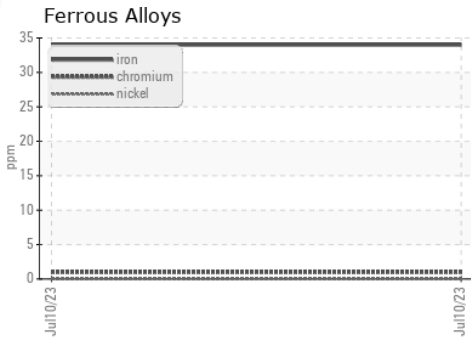

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0100620 **Received** : 13 Jul 2023
Lab Number : 05897874 **Diagnosed** : 17 Jul 2023
Unique Number : 10559230 **Diagnostician** : Don Baldrige
Test Package : FLEET (Additional Tests: FuelDilution, PercentFuel)

A Truck Repair
 9349 China Grove Church Road
 Pineville, NC
 US 28134
 Contact: Vlad Melnichuk
 shop@migway.com
 T: (980)255-3200
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)