


# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

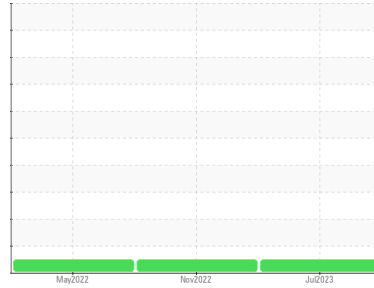

Area  
**(89691X) Walgreens**  
Machine Id  
**[Walgreens] 136A67130**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 10W30 (11 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0101027</b>	PCA0082430	PCA0075494
Sample Date	Client Info		<b>10 Jul 2023</b>	07 Nov 2022	09 May 2022
Machine Age	mls	Client Info	<b>434020</b>	409159	386327
Oil Age	mls	Client Info	<b>24861</b>	22832	20066
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >110	<b>11</b>	12	20
Chromium	ppm	ASTM D5185m >4	<b>0</b>	<1	<1
Nickel	ppm	ASTM D5185m >2	<b>0</b>	4	3
Titanium	ppm	ASTM D5185m	<b>0</b>	0	0
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	<1
Aluminum	ppm	ASTM D5185m >25	<b>4</b>	4	6
Lead	ppm	ASTM D5185m >45	<b>0</b>	<1	<1
Copper	ppm	ASTM D5185m >85	<b>1</b>	8	9
Tin	ppm	ASTM D5185m >4	<b>&lt;1</b>	<1	<1
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 2	<b>3</b>	3	7
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 50	<b>66</b>	60	61
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m 950	<b>845</b>	835	894
Calcium	ppm	ASTM D5185m 1050	<b>1094</b>	1085	1117
Phosphorus	ppm	ASTM D5185m 995	<b>1017</b>	951	935
Zinc	ppm	ASTM D5185m 1180	<b>1160</b>	1158	1128
Sulfur	ppm	ASTM D5185m 2600	<b>3384</b>	3473	2681

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >30	<b>5</b>	6	6
Sodium	ppm	ASTM D5185m	<b>0</b>	<1	<1
Potassium	ppm	ASTM D5185m >20	<b>3</b>	3	6



## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.4</b>	0.5	0.7
Nitration	Abs/cm	*ASTM D7624 >20	<b>8.7</b>	10.1	11.1
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>19.1</b>	21.3	22.3

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>15.7</b>	17	18.0
Base Number (BN)	mg KOH/g	ASTM D2896	<b>7.9</b>	8.8	6.8





# OIL ANALYSIS REPORT

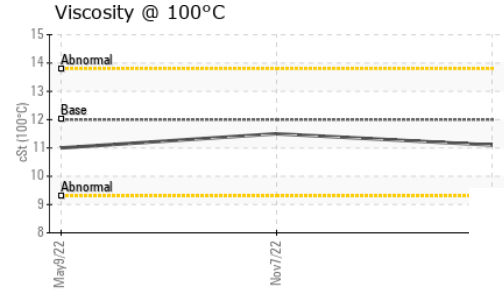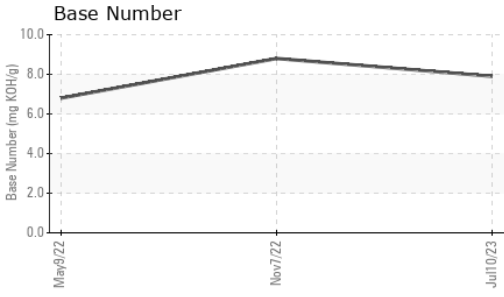

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	12.00	<b>11.1</b>	11.5	11.0

## GRAPHS

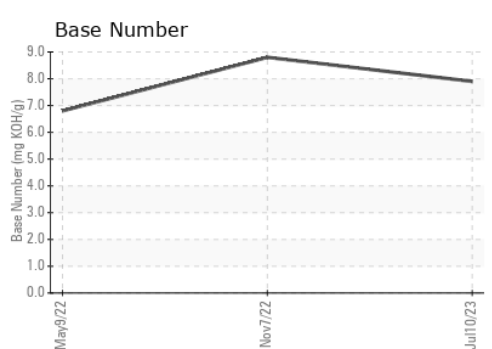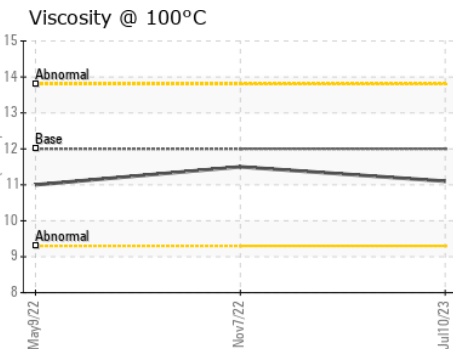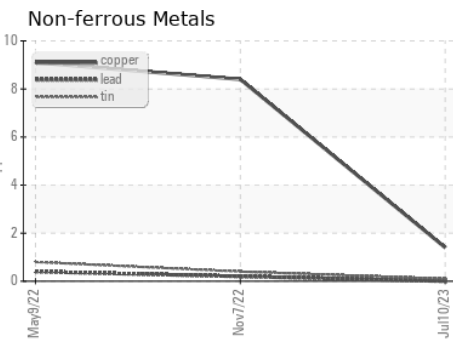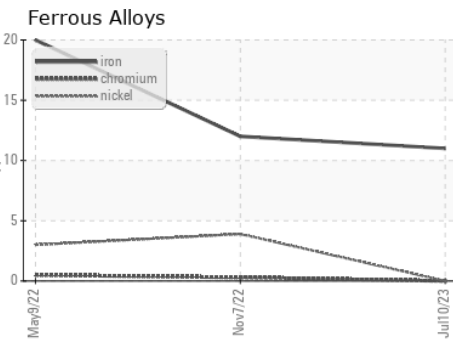

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0101027 **Received** : 13 Jul 2023  
**Lab Number** : **05897940** **Diagnosed** : 14 Jul 2023  
**Unique Number** : 10559296 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**Transervice - Shop 1373 - Berkeley-Anderson/Pendergrass**  
 101 Alliance Parkway  
 Willamston, SC  
 US 29697  
 Contact: Sonny Boucher  
 sboucher@transervice.com  
 T: (864)226-2304  
 F: (864)226-2329

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)