




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**



Machine Id  
**427083-402340**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

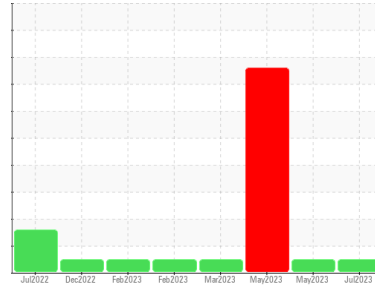

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0064602</b>	GFL0045403	GFL0045438
Sample Date	Client Info		<b>10 Jul 2023</b>	31 May 2023	10 May 2023
Machine Age	hrs	Client Info	<b>17131</b>	16844	16719
Oil Age	hrs	Client Info	<b>287</b>	16844	16719
Oil Changed	Client Info		<b>Not Chngd</b>	Changed	Not Chngd
Sample Status			<b>NORMAL</b>	NORMAL	SEVERE

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >120	<b>8</b>	10	41
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	<1	0
Nickel	ppm	ASTM D5185m >5	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185m >2	<b>0</b>	0	<1
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >20	<b>3</b>	3	79
Lead	ppm	ASTM D5185m >40	<b>&lt;1</b>	0	0
Copper	ppm	ASTM D5185m >330	<b>&lt;1</b>	1	3
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	<1	<1
Vanadium	ppm	ASTM D5185m	<b>0</b>	<1	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>8</b>	17	10
Barium	ppm	ASTM D5185m 0	<b>2</b>	0	0
Molybdenum	ppm	ASTM D5185m 60	<b>62</b>	67	59
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m 1010	<b>872</b>	951	913
Calcium	ppm	ASTM D5185m 1070	<b>1108</b>	1152	1117
Phosphorus	ppm	ASTM D5185m 1150	<b>964</b>	984	947
Zinc	ppm	ASTM D5185m 1270	<b>1203</b>	1199	1215
Sulfur	ppm	ASTM D5185m 2060	<b>3036</b>	3157	3089

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>6</b>	8	37
Sodium	ppm	ASTM D5185m	<b>2</b>	3	5
Potassium	ppm	ASTM D5185m >20	<b>2</b>	0	2

## INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >4	<b>0.5</b>	0.5	0.8
Nitration	Abs/cm	*ASTM D7624 >20	<b>7.6</b>	8.1	8.6
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>20.2</b>	20.4	20.4

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>15.4</b>	15.8	15.4
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>8.1</b>	7.4	8.2







# OIL ANALYSIS REPORT

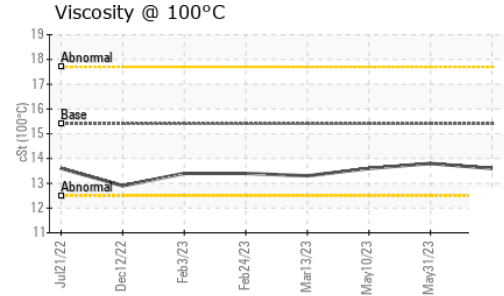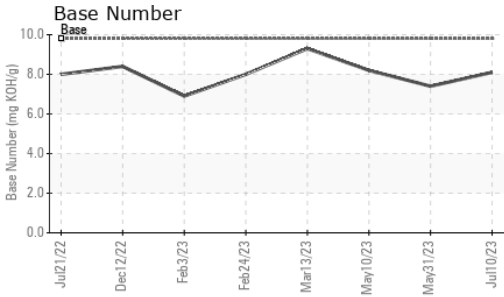

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.6</b>	13.8	13.6

## GRAPHS

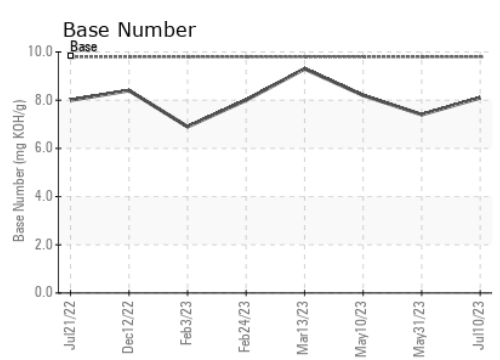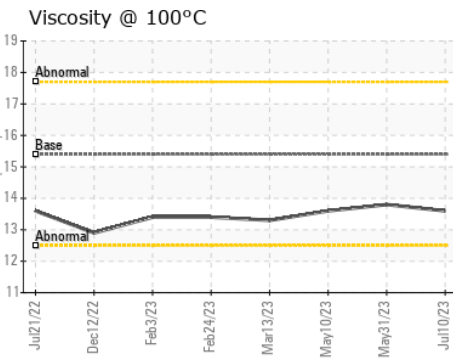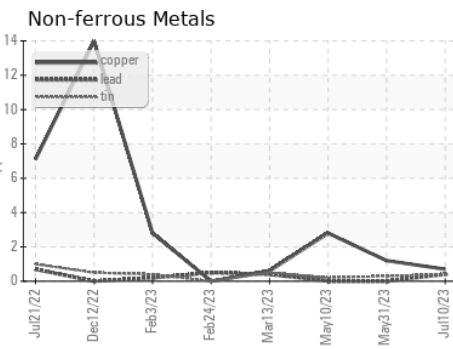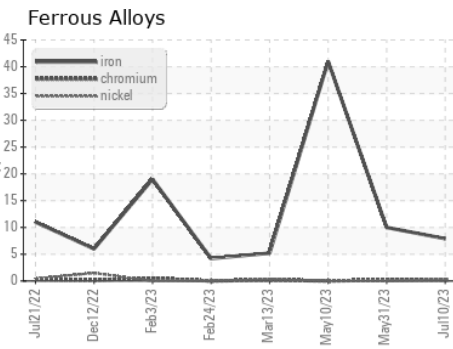

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0064602 **Received** : 14 Jul 2023  
**Lab Number** : 05898282 **Diagnosed** : 17 Jul 2023  
**Unique Number** : 10559638 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**GFL environmental - 867 - Trafford (Blount Hauling)**  
 1130 County Line Rd  
 Trafford, AL  
 US 35172  
 Contact: Jonathan Williams  
 jonathan.williams@gflenv.com  
 T:  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)