


OIL ANALYSIS REPORT

Sample Rating Trend

VISUAL METAL



Area
Rear Load
Machine Id
REL133322
Component
Hydraulic System
Fluid
NOT GIVEN (--- GAL)

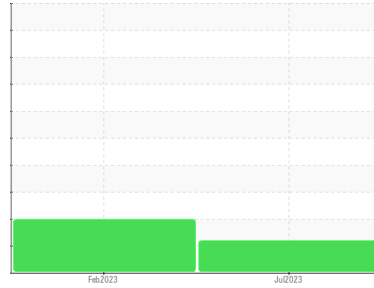

DIAGNOSIS

Recommendation

We recommend you service the filters on this component. We advise that you inspect for possible wear. Resample at the next service interval to monitor. We were unable to perform a particle count due to metal particles present in this sample.

Wear

Moderate concentration of visible metal present. All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	PCA0090701	PCA0083085	---
Sample Date	Client Info	03 Jul 2023	20 Feb 2023	---
Machine Age	hrs	27063	24524	---
Oil Age	hrs	26560	24524	---
Oil Changed	Client Info	N/A	N/A	---
Sample Status		ABNORMAL	ABNORMAL	---

WEAR METALS

method	limit/base	current	history1	history2
Iron ppm	ASTM D5185m >50	12	19	---
Chromium ppm	ASTM D5185m >10	4	6	---
Nickel ppm	ASTM D5185m >4	0	<1	---
Titanium ppm	ASTM D5185m	0	<1	---
Silver ppm	ASTM D5185m	0	0	---
Aluminum ppm	ASTM D5185m >5	<1	1	---
Lead ppm	ASTM D5185m >4	0	<1	---
Copper ppm	ASTM D5185m >15	4	6	---
Tin ppm	ASTM D5185m >4	0	1	---
Vanadium ppm	ASTM D5185m	<1	0	---
Cadmium ppm	ASTM D5185m	0	0	---

ADDITIVES

method	limit/base	current	history1	history2
Boron ppm	ASTM D5185m	2	4	---
Barium ppm	ASTM D5185m	0	0	---
Molybdenum ppm	ASTM D5185m	2	3	---
Manganese ppm	ASTM D5185m	<1	<1	---
Magnesium ppm	ASTM D5185m	11	14	---
Calcium ppm	ASTM D5185m	119	153	---
Phosphorus ppm	ASTM D5185m	352	345	---
Zinc ppm	ASTM D5185m	427	421	---
Sulfur ppm	ASTM D5185m	1188	1028	---

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon ppm	ASTM D5185m >15	2	4	---
Sodium ppm	ASTM D5185m	7	9	---
Potassium ppm	ASTM D5185m >20	1	2	---



FLUID CLEANLINESS

method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647 >5000	---	▲ 37613	---
Particles >6µm	ASTM D7647 >1300	---	▲ 7255	---
Particles >14µm	ASTM D7647 >160	---	▲ 395	---
Particles >21µm	ASTM D7647 >40	---	▲ 55	---
Particles >38µm	ASTM D7647 >10	---	2	---
Particles >71µm	ASTM D7647 >3	---	0	---
Oil Cleanliness	ISO 4406 (c) >19/17/14	---	▲ 22/20/16	---

FLUID DEGRADATION

method	limit/base	current	history1	history2
Acid Number (AN) mg KOH/g	ASTM D8045	0.30	0.36	---

OIL ANALYSIS REPORT

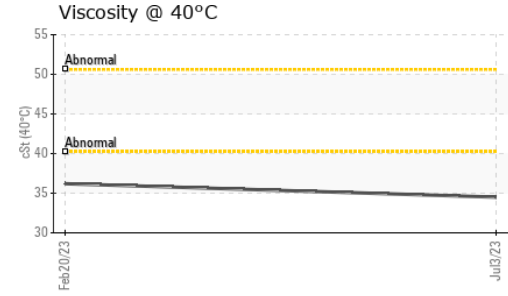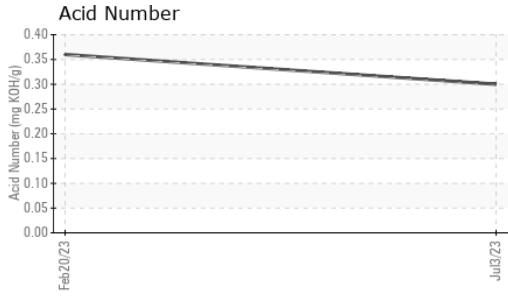





VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	▲ MODER	LIGHT
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	LIGHT
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	34.5	36.2	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color					no image
Bottom					no image

GRAPHS

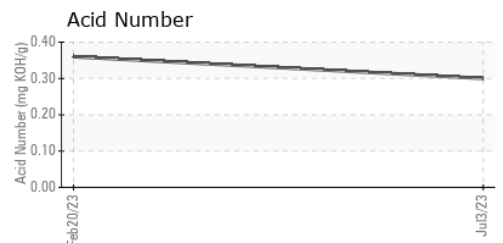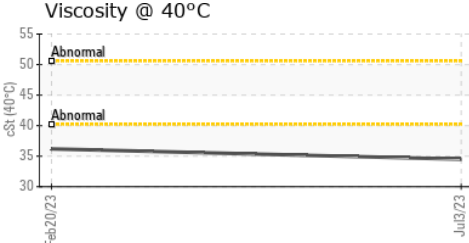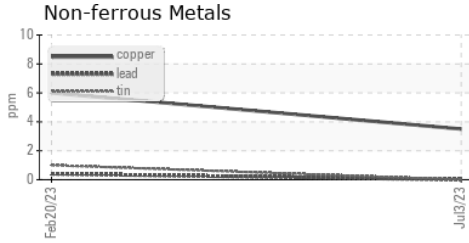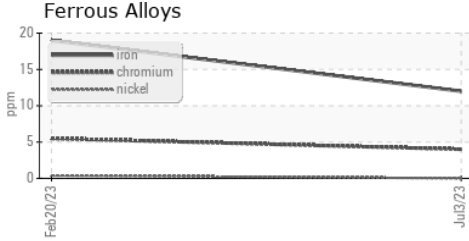

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0090701 **Received** : 14 Jul 2023
Lab Number : 05898539 **Diagnosed** : 17 Jul 2023
Unique Number : 10559895 **Diagnostician** : Jonathan Hester
Test Package : MOB 2

UMM - Shop 401 - Norton
 186 South Washington Street
 Norton, MA
 US 02766
 Contact: Dave Wilson Jr.
 Dwilson1@win-waste.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: