


OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL

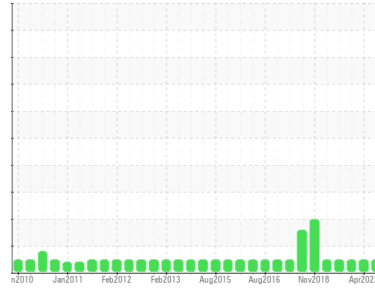

Machine Id
PREVOST 427U

Component
Rear Diesel Engine

Fluid
PETRO CANADA DURON HP 15W40 (8 GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		PCA0094188	PCA0076589	PCA0047487
Sample Date	Client Info		30 Jun 2023	22 Apr 2022	26 Feb 2021
Machine Age	mls	Client Info	578237	547549	535076
Oil Age	mls	Client Info	18239	12473	11839
Oil Changed	Client Info		Changed	Changed	N/A
Sample Status			NORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<1.0	<1.0	<1.0
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >200	75	47	76
Chromium	ppm	ASTM D5185m >20	3	2	4
Nickel	ppm	ASTM D5185m >2	<1	0	<1
Titanium	ppm	ASTM D5185m >2	<1	0	<1
Silver	ppm	ASTM D5185m >2	0	0	0
Aluminum	ppm	ASTM D5185m >30	20	9	10
Lead	ppm	ASTM D5185m >30	4	<1	4
Copper	ppm	ASTM D5185m >30	11	2	4
Tin	ppm	ASTM D5185m >15	3	1	4
Antimony	ppm	ASTM D5185m	---	---	<1
Vanadium	ppm	ASTM D5185m	<1	0	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	2	26	8
Barium	ppm	ASTM D5185m	2	0	0
Molybdenum	ppm	ASTM D5185m	63	42	65
Manganese	ppm	ASTM D5185m	1	<1	1
Magnesium	ppm	ASTM D5185m	896	573	961
Calcium	ppm	ASTM D5185m	1129	1435	1124
Phosphorus	ppm	ASTM D5185m	969	752	1098
Zinc	ppm	ASTM D5185m	1215	945	1317
Sulfur	ppm	ASTM D5185m	2985	2608	2370

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >30	11	6	5
Sodium	ppm	ASTM D5185m	24	10	8
Potassium	ppm	ASTM D5185m >20	17	2	6



INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	1.4	1.1	1.1
Nitration	Abs/cm	*ASTM D7624 >20	10.6	10.8	11
Sulfation	Abs/.1mm	*ASTM D7415 >30	22.8	24.0	21.1

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	18.3	20.5	16
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	9.39	10.1	8.78









OIL ANALYSIS REPORT

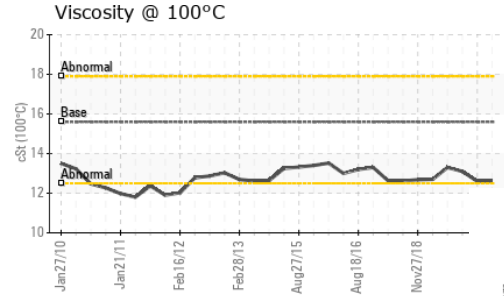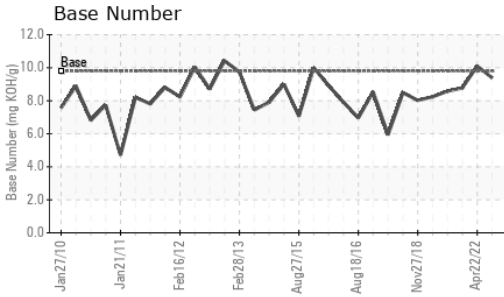

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.6	12.6	12.6	13.1

GRAPHS

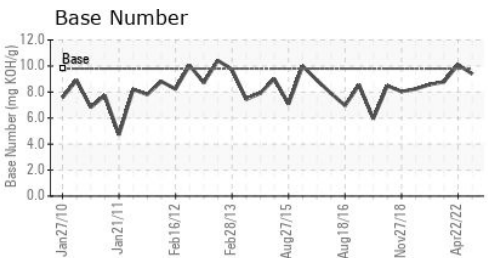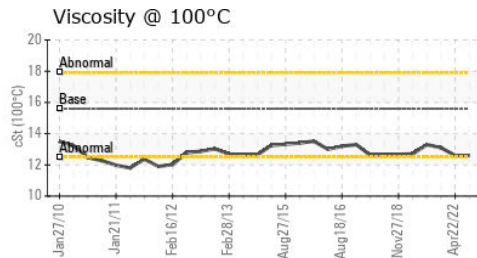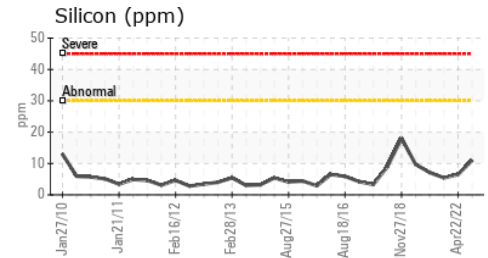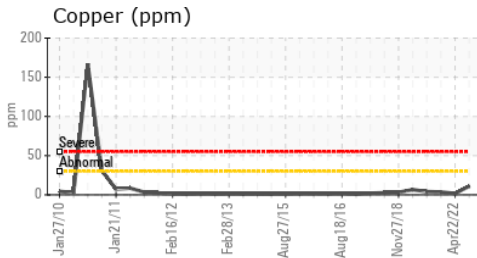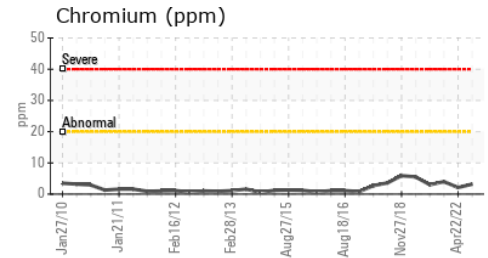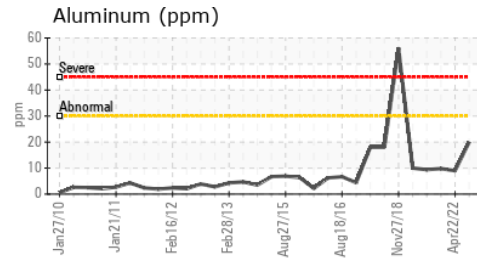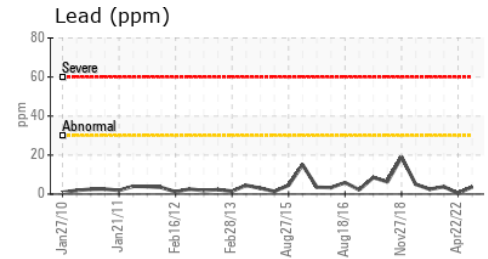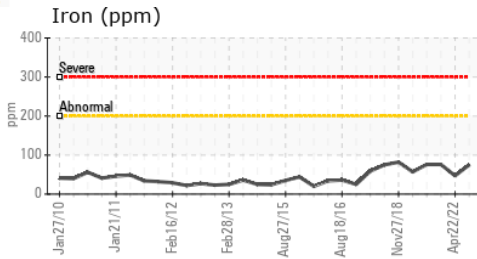

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0094188 **Received** : 14 Jul 2023
Lab Number : 05898755 **Diagnosed** : 17 Jul 2023
Unique Number : 10560111 **Diagnostician** : Wes Davis
Test Package : MOB 2

BROWN BUS COMPANY - UPSTATE TRANSIT
 50 VENNOR ROAD
 AMSTERDAM, NY
 US 12010
 Contact: CONNIE WILBUR
 cwilbur@browncoach.com
 T: (518)843-4700
 F: (518)843-3600

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)