


# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

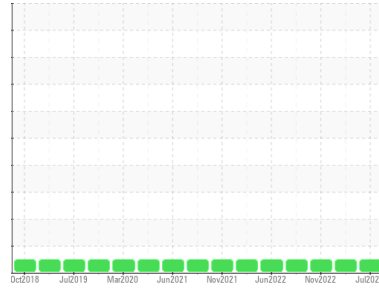

Machine Id  
**PREVOST MOTOR COACH 114**  
 Component  
**Rear Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2	
Sample Number	Client Info	<b>PCA0094189</b>	PCA0094176	PCA0085115	
Sample Date	Client Info	<b>03 Jul 2023</b>	06 Mar 2023	10 Nov 2022	
Machine Age	mls	Client Info	<b>172916</b>	159506	148591
Oil Age	mls	Client Info	<b>11410</b>	10915	10146
Oil Changed	Client Info	<b>Changed</b>	Changed	Changed	
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL	

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >100	<b>22</b>	19	13
Chromium	ppm ASTM D5185m >20	<b>&lt;1</b>	0	<1
Nickel	ppm ASTM D5185m >4	<b>&lt;1</b>	0	0
Titanium	ppm ASTM D5185m	<b>0</b>	0	0
Silver	ppm ASTM D5185m >3	<b>0</b>	<1	0
Aluminum	ppm ASTM D5185m >20	<b>2</b>	<1	<1
Lead	ppm ASTM D5185m >40	<b>&lt;1</b>	0	<1
Copper	ppm ASTM D5185m >330	<b>2</b>	2	1
Tin	ppm ASTM D5185m >15	<b>&lt;1</b>	0	0
Vanadium	ppm ASTM D5185m	<b>&lt;1</b>	<1	0
Cadmium	ppm ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	<b>&lt;1</b>	1	0
Barium	ppm ASTM D5185m 0	<b>2</b>	0	0
Molybdenum	ppm ASTM D5185m 60	<b>79</b>	69	62
Manganese	ppm ASTM D5185m 0	<b>&lt;1</b>	1	<1
Magnesium	ppm ASTM D5185m 1010	<b>1235</b>	1105	992
Calcium	ppm ASTM D5185m 1070	<b>1355</b>	1232	1139
Phosphorus	ppm ASTM D5185m 1150	<b>1303</b>	1149	1065
Zinc	ppm ASTM D5185m 1270	<b>1643</b>	1449	1310
Sulfur	ppm ASTM D5185m 2060	<b>4478</b>	3917	3809

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	<b>4</b>	4	2
Sodium	ppm ASTM D5185m	<b>3</b>	<1	<1
Potassium	ppm ASTM D5185m >20	<b>3</b>	<1	0



## INFRA-RED

method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	<b>0.3</b>	0.4	0.3
Nitration	Abs/cm *ASTM D7624 >20	<b>8.1</b>	7.6	7.8
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>19.2</b>	18.2	20.2

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>15.1</b>	13.8	15.4
Base Number (BN)	mg KOH/g ASTM D2896 9.8	<b>8.02</b>	9.24	8.51









# OIL ANALYSIS REPORT

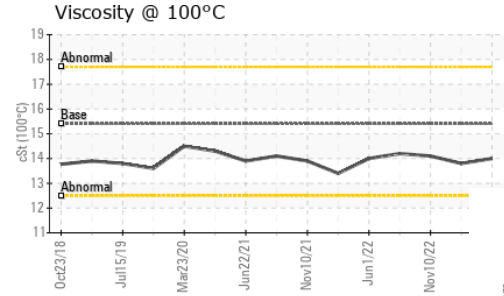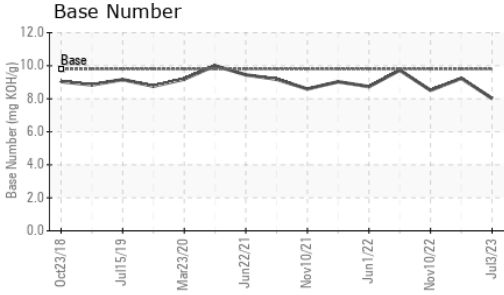

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>14.0</b>	13.8	14.1

## GRAPHS

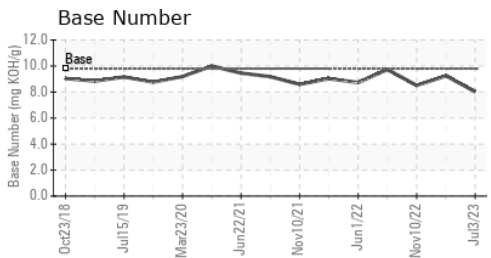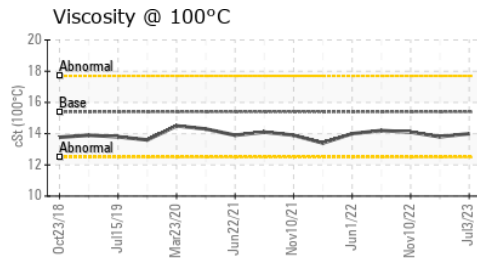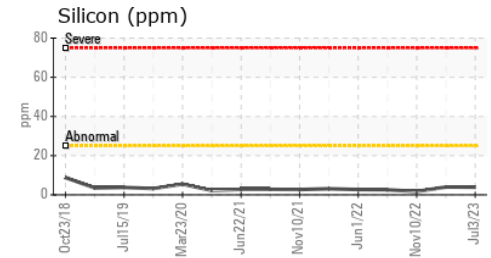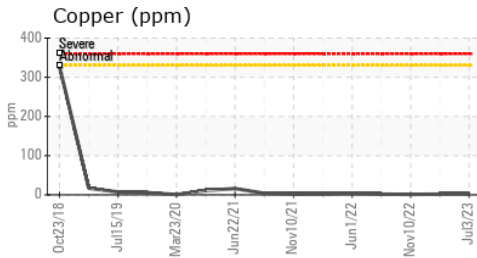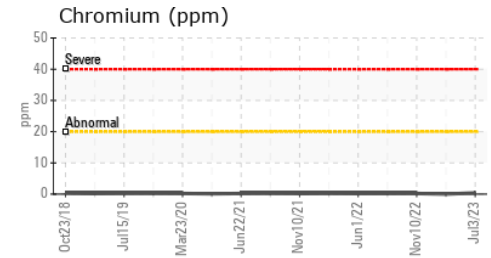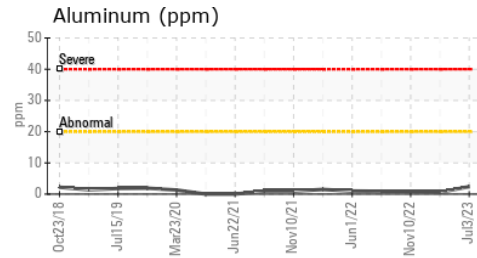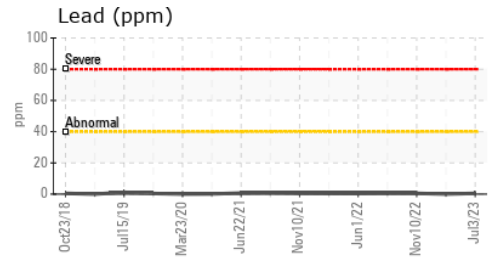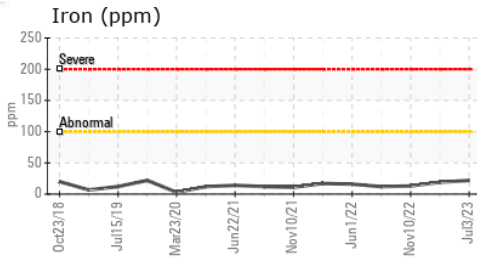

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0094189 **Received** : 14 Jul 2023  
**Lab Number** : **05898757** **Diagnosed** : 17 Jul 2023  
**Unique Number** : 10560113 **Diagnostician** : Wes Davis  
**Test Package** : MOB 2

**BROWN BUS COMPANY - UPSTATE TRANSIT**  
 50 VENNERS ROAD  
 AMSTERDAM, NY  
 US 12010  
 Contact: CONNIE WILBUR  
 cwilbur@browncoach.com  
 T: (518)843-4700  
 F: (518)843-3600

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)