




PROBLEM SUMMARY

Sample Rating Trend

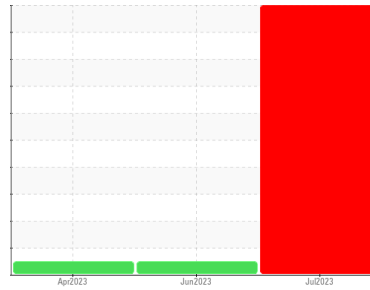

WEAR




Machine Id
427180 - SW4720

Component
Diesel Engine


Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

COMPONENT CONDITION SUMMARY


Ferrous Alloys

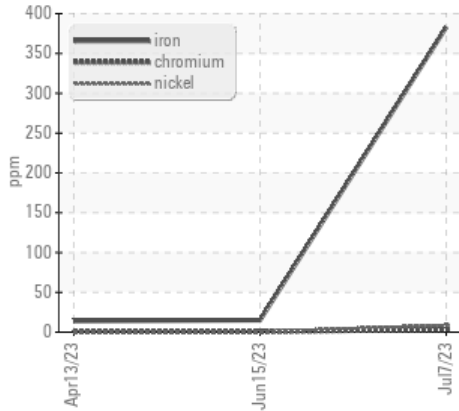

Silicon (ppm)

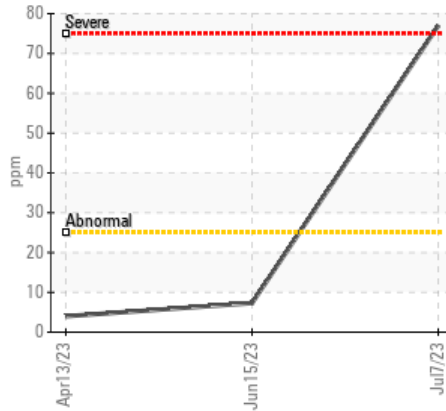

Aluminum (ppm)

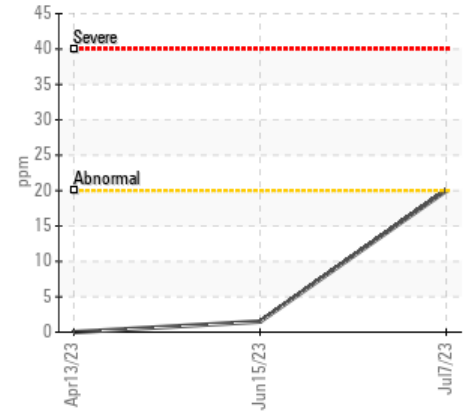

RECOMMENDATION

We advise that you check the air filter, air induction system, and any areas where dirt may enter the component. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

PROBLEMATIC TEST RESULTS

Sample Status			SEVERE	NORMAL	NORMAL
Iron	ppm	ASTM D5185m >100	383	15	14
Nickel	ppm	ASTM D5185m >4	9	<1	0
Aluminum	ppm	ASTM D5185m >20	20	2	0
Silicon	ppm	ASTM D5185m >25	77	7	4

Customer Id: GFL983
Sample No.: GFL0085467
Lab Number: 05899273
Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data:
Jonathan Hester +1 919-379-4092 x4092
jhester@wearcheckusa.com

To change component or sample information:
Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Fluid	---	---	?	Oil and filter change at the time of sampling has been noted.
Change Filter	---	---	?	Oil and filter change at the time of sampling has been noted.
Resample	---	---	?	We recommend an early resample to monitor this condition.
Check Dirt Access	---	---	?	We advise that you check the air filter, air induction system, and any areas where dirt may enter the component.

HISTORICAL DIAGNOSIS

15 Jun 2023 Diag: Don Baldrige

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

view report



13 Apr 2023 Diag: Wes Davis

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.


view report





OIL ANALYSIS REPORT

Sample Rating Trend

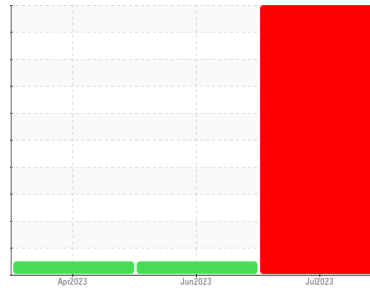

WEAR



Machine Id
427180 - SW4720

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

DIAGNOSIS

Recommendation

We advise that you check the air filter, air induction system, and any areas where dirt may enter the component. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

Wear

Cylinder, crank, or cam shaft wear is indicated. Valve wear is indicated.

Contamination

Elemental levels of silicon (Si) and aluminum (Al) indicate alumina-silicate (coarse dirt) ingress.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0085467	GFL0075319	GFL0075394
Sample Date	Client Info		07 Jul 2023	15 Jun 2023	13 Apr 2023
Machine Age	mls	Client Info	339095	335683	325078
Oil Age	mls	Client Info	339095	325078	0
Oil Changed	Client Info		Changed	Changed	N/A
Sample Status			SEVERE	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<1.0	<1.0	<1.0
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	383	15	14
Chromium	ppm	ASTM D5185m >20	3	<1	<1
Nickel	ppm	ASTM D5185m >4	9	<1	0
Titanium	ppm	ASTM D5185m	<1	0	0
Silver	ppm	ASTM D5185m >3	<1	0	0
Aluminum	ppm	ASTM D5185m >20	20	2	0
Lead	ppm	ASTM D5185m >40	3	6	4
Copper	ppm	ASTM D5185m >330	9	1	<1
Tin	ppm	ASTM D5185m >15	7	<1	<1
Vanadium	ppm	ASTM D5185m	<1	0	0
Cadmium	ppm	ASTM D5185m	<1	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	115	0	0
Barium	ppm	ASTM D5185m 0	<1	0	0
Molybdenum	ppm	ASTM D5185m 60	28	51	63
Manganese	ppm	ASTM D5185m 0	7	<1	<1
Magnesium	ppm	ASTM D5185m 1010	30	115	813
Calcium	ppm	ASTM D5185m 1070	1561	2663	1478
Phosphorus	ppm	ASTM D5185m 1150	1375	1188	1095
Zinc	ppm	ASTM D5185m 1270	865	1394	1350
Sulfur	ppm	ASTM D5185m 2060	15382	3752	3354

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	77	7	4
Sodium	ppm	ASTM D5185m	4	<1	1
Potassium	ppm	ASTM D5185m >20	7	5	4

INFRA-RED






	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	0.1	0.3	0.4
Nitration	Abs/cm	*ASTM D7624 >20	7.4	9.6	10.6
Sulfation	Abs/.1mm	*ASTM D7415 >30	60.4	22.5	22.9

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	66.2	14.8	17.9
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	10.9	6.0	7.9







OIL ANALYSIS REPORT

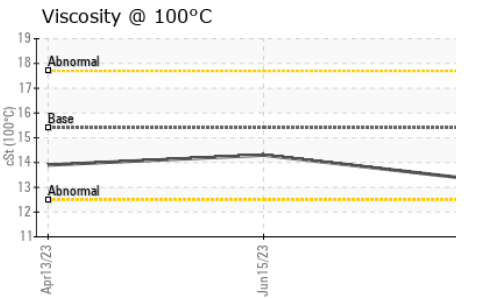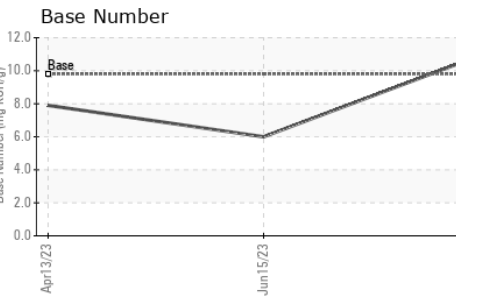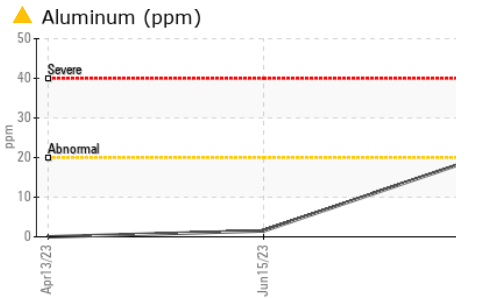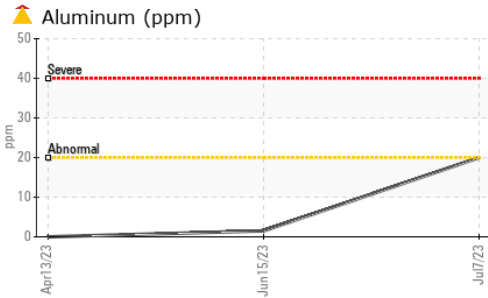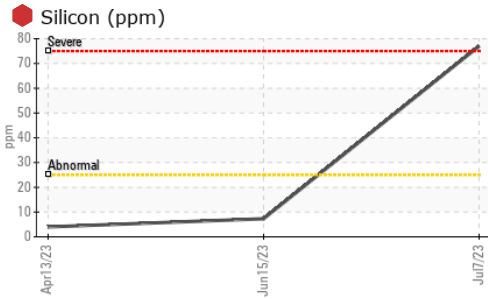

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	13.3	14.3

GRAPHS

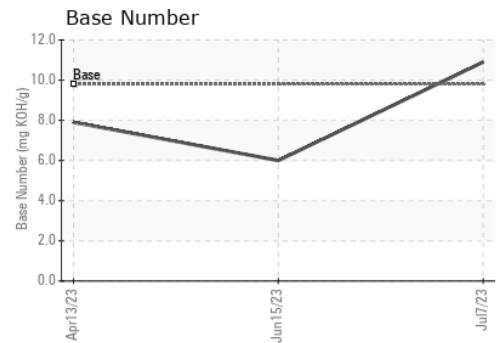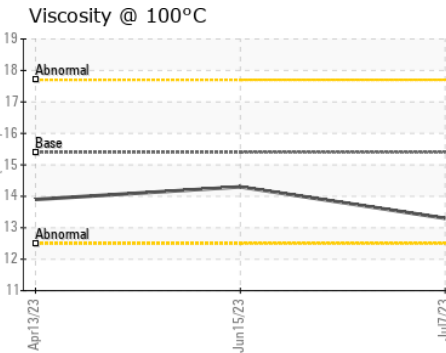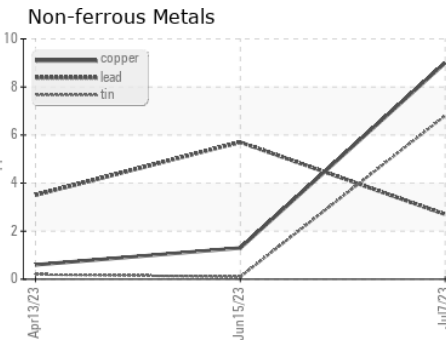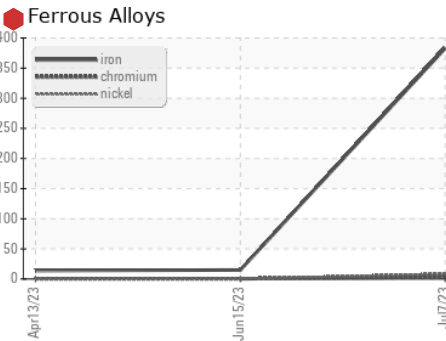

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : GFL0085467
 Lab Number : 05899273
 Unique Number : 10560629
 Test Package : FLEET

GFL Environmental - 983 - Sugar Land Hauling
 16011 West Belfort Street
 Sugar Land, TX
 US 77498
 Contact: Gino Griego
 ggriego@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: